


New, vibrant colours available - with improved colour stability



Please refer to page XX

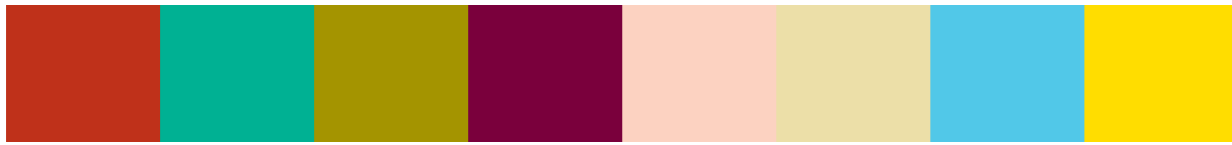

P & A Wood



Selfridges

## essential / resin / AltroFlow™ / AltroGrip Plus™ /

### Flow applied flooring

Altro resin flow applied flooring provides systems for application to flat level floors, at thicknesses from 1mm to 5mm, providing an easily maintained, smooth, seamless surface, with good chemical, abrasion and impact resistance.

Modified flow applied systems of between 2mm and 6mm in thickness are available where anti-slip performance is required. Both systems require the substrate to be treated with AltroPrime.

**AltroFlow** - three pack, epoxy, solvent-free, low taint.  
**AltroGrip Plus** - based on AltroFlow with two coats of AltroTect and inclusion of an aggregate filler offering slip resistance.

FeRFA Type	Warranty	Impact Resistance	Chemical Resistance*	Hygiene	Ease of Cleaning	Thickness	Application Method
AltroFlow / FeRFA Type 5, 7	6 years	Good	Moderate	Good	Easy	1-3mm, 5mm	Roller/Trowel
AltroGrip Plus / FeRFA Type 4	6 years	Excellent	Moderate	Good	Moderate/Easy	2-6mm	Roller/Trowel



Please see Product Selector Chart on page 13 for full details.

\* Please consult Altro Technical Services for all chemical resistance details.

For more on the benefits of Altro resin systems, see pages 166 to 169.

explore altroism at [www.altro.com](http://www.altro.com)

product information:

Tel: 01462 707600 E-mail: [enquiries@altro.com](mailto:enquiries@altro.com)



[samples@altro.com](mailto:samples@altro.com)

\* FOR SMALL DEMARKATION AREAS ONLY, PLEASE REFER TO ALTRO. † NOT AVAILABLE IN ALTROFLOW RANGE.

EXPERIENCE HAS SHOWN THAT PRINTING CANNOT REPRODUCE COLOURS ACCURATELY. IF COLOUR CHOICE IS CRITICAL, PLEASE REQUEST A SAMPLE OF THE MATERIAL.