Harlequin Liberty Permanent Sprung Floor Panels

Harlequin Liberty Portable Sprung Floor Panels

Specification Guide Harlequin Liberty Permanent Sprung Floor Panels

| | Dimensions | Weight | Installed Thickness | Installation Times |
|-------------------|-----------------|----------------|---------------------------|--|
| Liberty Permanent | Full size panel | | | |
| | 2m x 1m | 25 kg (55 lbs) | 37mm (1 ¹ /2") | Approx. 100 sq.m |
| | (78" x 39") | | | (120 sq.yd.) per day with 2 persons |
| | Half size panel | | | |
| | 1m x 1m | | | |
| | (39" x 39") | | | |

Specification Guide Harlequin Liberty Portable Sprung Floor Panels

| | Dimensions | Weight | Installed Thickness | Installation Times |
|------------------|---|----------------|--|--|
| Liberty Portable | Full size panel 2m x 1m (78" x 39") | 35 kg (77 lbs) | 42mm (1 ⁵ /8") plus the Harlequin floor | Approx. 50 sq.m. (60 sq.yd.) per hour with 2 persons |
| | Half size panel 1m x 1m (39" x 39") | | | |

Harlequin Liberty is a modular floor manufactured from engineered panels with elastomer blocks located at regular intervals on the underside. Panels are laid brickwork on the sub-floor so that cross-joins do not coincide. They are linked to each other by a radiussed tongue and groove pivot joint and secured by means of a unique locking system which removes the need to fix the panels mechanically to the sub-floor.






Rolling out the dance vinyl



Installation of Liberty panels at Laban, London.

Panels layout

Liberty panels with Cascade surface at the Schweizerische Ballettberufsschule, Zürich, Switzerland





The Harlequin storage cart loaded with Liberty panels



Installing the panels Fitting the edge trim

DIN STANDARD 18032 PART II Test Results Harlequin Liberty

| | Shock Absorption | Vertical Deformation | Area Deflection | Rolling Load |
|-------------------|---------------------|-------------------------|--------------------|-----------------|
| Requirement | Min 53% | Min 2.3mm | Max 15% | Min 1500 N |
| Harlequin Liberty | 67% | 4.1mm | 12.8% | > 1500 N |

Standards and tests

Manufacturers are correctly required to ensure products perform to published specifications. At present there are no British standards specifically for dance floors that architects can work to. The absence of standards for dance floors was noted by the US-based organisation Entertainment Services Technical Association (ESTA) (www.esta.org) and a Working Group was set up to establish an international standard to be adopted by the American National Standards Institute (ANSI). The Working Group consists of manufacturers, end-users and specifiers and the Harlequin group is represented by its associate, American Harlequin Corporation. The new standard will be broadly based on the comprehensive German standard DIN 18032 part II, but modified to reflect the interests of dancers and related stage performers, and will provide protection to specifiers and manufacturers in the form of consensual test data.

Harlequin subjects its flooring products to tests by various international authorities covering, for example, physical and acoustic properties, resilience and slip resistance and test information specific to Harlequin floors is available from British Harlequin on request. All our sprung floors meet the relevant requirements of DIN 18032 part II and we will ensure compliance with the relevant sections of the new EN (European standard) for flooring. However, it cannot be assumed that if a product conforms to these standards it will automatically be approved by dancers, whose predilictions vary.

British Harlequin plc Festival House, Chapman Way

Tunbridge Wells, Kent TN2 3EF Tel. 01892 514 888 Fax 01892 514 222 Freephone 0800 28 99 32 www.harlequinfloors.com enquiries@harlequinfloors.com

Harlequin Europe SA

29, rue Notre-Dame L-2240 Luxembourg Tel. +352 46 44 22 Tel. FR +352 46 44 99 Tel. DE +352 46 39 39 Free phone 008 009 069 1000 Fax +352 46 44 40 www.harlequinfloors.com info@harlequinfloors.com

American Harlequin Corporation

1531 Glen Avenue, Moorestown NJ 08057, USA Tel. +1 (1) 856 234 5505 Toll Free in USA 800 642 6440 Fax +1 (1) 856 231 4403 www.harlequinfloors.com dance@harlequinfloors.com

Harlequin Australasia Pty Ltd.

PO Box 1028, 36A Langston Place Epping, NSW 1710, Australia Tel. +61 (2) 9869 4566 AUS Freecall 1300 666 900 Fax +61 (2) 9869 4547 www.harlequinfloors.com contact@harlequinfloors.com

LONDON LUXEMBOURG LOS ANGELES PHILADELPHIA FORT WORTH SYDNEY

| HARLEOUIN The world dances on Harlequin floors® |
|--|

| Uniclass L84621 | | | | EPIC E434 |
|--------------------|------|---|---|--------------|
| CI/SfB 52 | (43) | X | (| |
| | | | | |


Sprung Floor Panel System

HARLEQUIN LIBERTY[™]

Harlequin Liberty Permanent Sprung Floor Panels

Harlequin Liberty is a relatively "springy" floor, with good area elasticity. The foam blocks compress progressively under light and heavy loads, giving uniform and consistent shock damping and providing the same "feel" and energy return to one or several dancers on the same panel. The pivot joint extends along the panel edges to within 20mm of the corners ensuring the corners are protected from flexion under load and the edges are also carefully supported by elastomer blocks.

Harlequin Liberty panels are available in two versions: portable panels, which can be laid down to create a sprung floor and then taken up and moved to another venue or stored for future use; permanent panels, which have the advantage that they can be taken up and re-installed at another location or used in a different configuration if required.

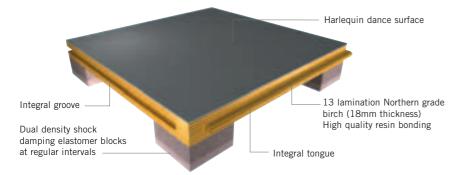


Harlequin Liberty Portable Sprung Floor Panels

Oil-tempered hardboard (Masonite) is attached to the underside of the portable panels to


- ease sliding of the panels into position
- protect the elastomer blocks
- allow the panels to be stacked more readily.

Edge trim and ramps are available for stage use or where the sprung floor does not extend to the walls of the studio. Harlequin Liberty portable panels are also available with matt black surface for stage use.

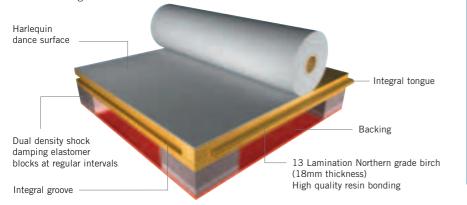

Photography: Richard Dunkley Dancers left to right: Paulin Huguet & Roland Cox Paulin Huguet & Roland Cox Ana Lucia Alves Femi Oyewole



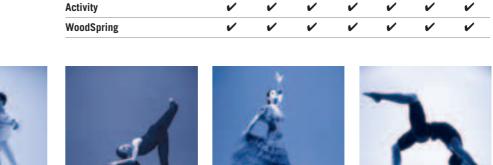

Application Guide - Harlequin's Portable & Permanent Vinyl Floors

STUDIO

1

~

CASCADE

V

1

ALLEGRO

TEMPO

~

~

FIESTA

~

STANDFAST

~

MARINE

~

REVERSIBLE

~

Liberty - Portable Sprung Floor Panels Storage Cart

Storage Carts allow for safe storage and easy handling of Harlequin Liberty panels, edge trim and ramps.

- Carts carry up to 20 full size sprung panels
- Very fast to load and unload
- Easy to manoeuvre with non-marking braked wheels
- Forklift pockets for side lifting

Specification

✔ Available

Liberty Permanent

Liberty Portable

Constructed from black scratch-resistant powder-coated steel, all carts are fitted with four heavy-duty swivel castors with brakes and non-marking polyamide wheels.





The Company reserves the right to make any variation in design or construction of the material described.

HarlequinTM and LibertyTM are trademarks of British Harlequin plc, American Harlequin Corporation and Harlequin Furope SA

Country of origin: Made in the EU © British Harlequin plc, American Harlequin Corporation and Harlequin Europe SA. 2007

DISTRIBUTOR L1/07/BH001

Harlequin Liberty Harlequin Liberty

2.1 2.1

