

s66 bench



description


Cut stone ends and seat surface with stainless steel sub-frame.

dimensions

Length 3000mm, width 600mm, height 460mm.

options



Choice of granite or limestone.
Choice of finish; polished, flamed or bush hammered.
Continuous surface slab or broken with stainless steel 'anti-skate' bars.

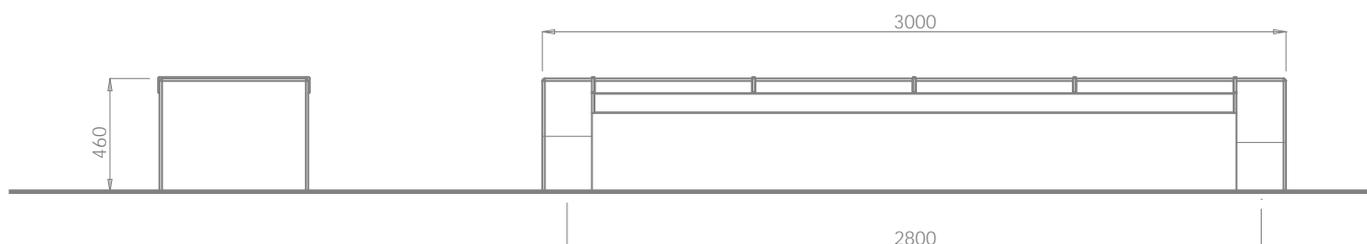

s66 Fixing Instructions


(for areas already paved, note: fixing is optional)

- 1 Determine the location for the bench. Remove the pavers and excavate two holes at centres 1750mm to minimum dimensions of L600 x W600 x D400mm. The size of the foundations may vary depending on the ground conditions.
- 2 Fill the holes with 35N20 concrete up to 15mm below the level of the underside of the pavers ensuring a good smooth surface finish.
- 3 Allow sufficient time for the concrete to set and then apply a layer of dry sand/cement mix over the pad. Compact and adjust this to the level of the underside of the paving.
- 4 Replace the paving slabs and ensure that they are well bedded in.
- 5 Place the bench in the desired location and mark around each end support using a nonpermanent chalk.
- 6 Remove the bench. Mark holes at a distance of 400mm ctrs, centred within the outline.
- 7 Drill 4 no. holes, diameter 25mm.
- 8 Generously apply epoxy cement to the dowel rods and insert into the holes leaving 80mm of rod above ground level.
- 9 Apply epoxy cement to holes in the bench ends.
- 10 Align the bench over the rods and lower into position.



Foundations

The bench can be fixed directly to a concrete slab or to concrete pads beneath the paving stones. Foundations must be to engineers specification.

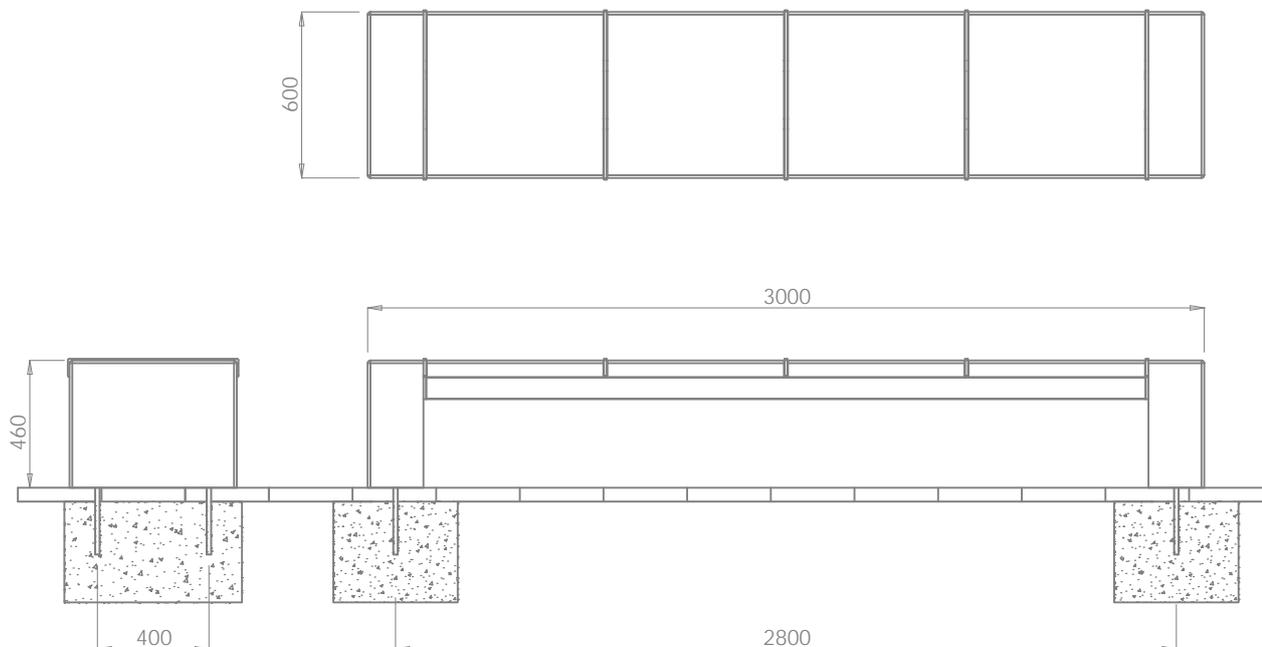

Above, fixing details.

s66 Care and Maintenance Guidelines

The s66 bench is constructed from cut stone (granite or Kilkenny blue limestone) with a stainless steel frame. The materials have been selected for their excellent outdoor durability as well as their aesthetic properties.

Some care is required to maintain the product's original appearance. The extent to which maintenance is required will depend on a number of factors including environmental conditions, construction activity and level of use.

Maintaining the stainless steel frame

Prior to shipping all our stainless steel has been passivated to ASTM A380 and ASTM 976 01-8.1 to ensure the highest standard.

Clean the stainless steel components using warm water with a mild detergent with a non abrasive cloth or sponge. Heavier stains may require the use of a nylon scouring pad. As a rule always start with the least severe method of cleaning as the use of scouring pads or scotch bright may result in altering the surface texture. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain. If you are in doubt as to which type of finish you are dealing with contact Omos on + 353 [0]45 899802.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particular in areas where construction work has been undertaken. Such stains can be removed using an abrasive pad as described above.

In cases where the surface is severely stained as a result of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish. Contact Omos for advise on such issues.

There are many stainless steel polishes available to enhance the surface finish. Omos recommends 'Avesta Finishing chemicals' and can advise where to purchase.

Maintaining the stone


Clean the stone using warm water with a mild detergent with a stiff scrubbing brush. We do not recommend the use of a power washer as it may cause damage.

Where no alternative exists (graffiti or other severe staining) a power washer may be used but first test in an inconspicuous area to ensure the pressure is not so great as to erode or chip the stone. Do not direct the spray at the stone as it may cause damage.



Right, s66 polished granite seat detail.

Stone Finishes

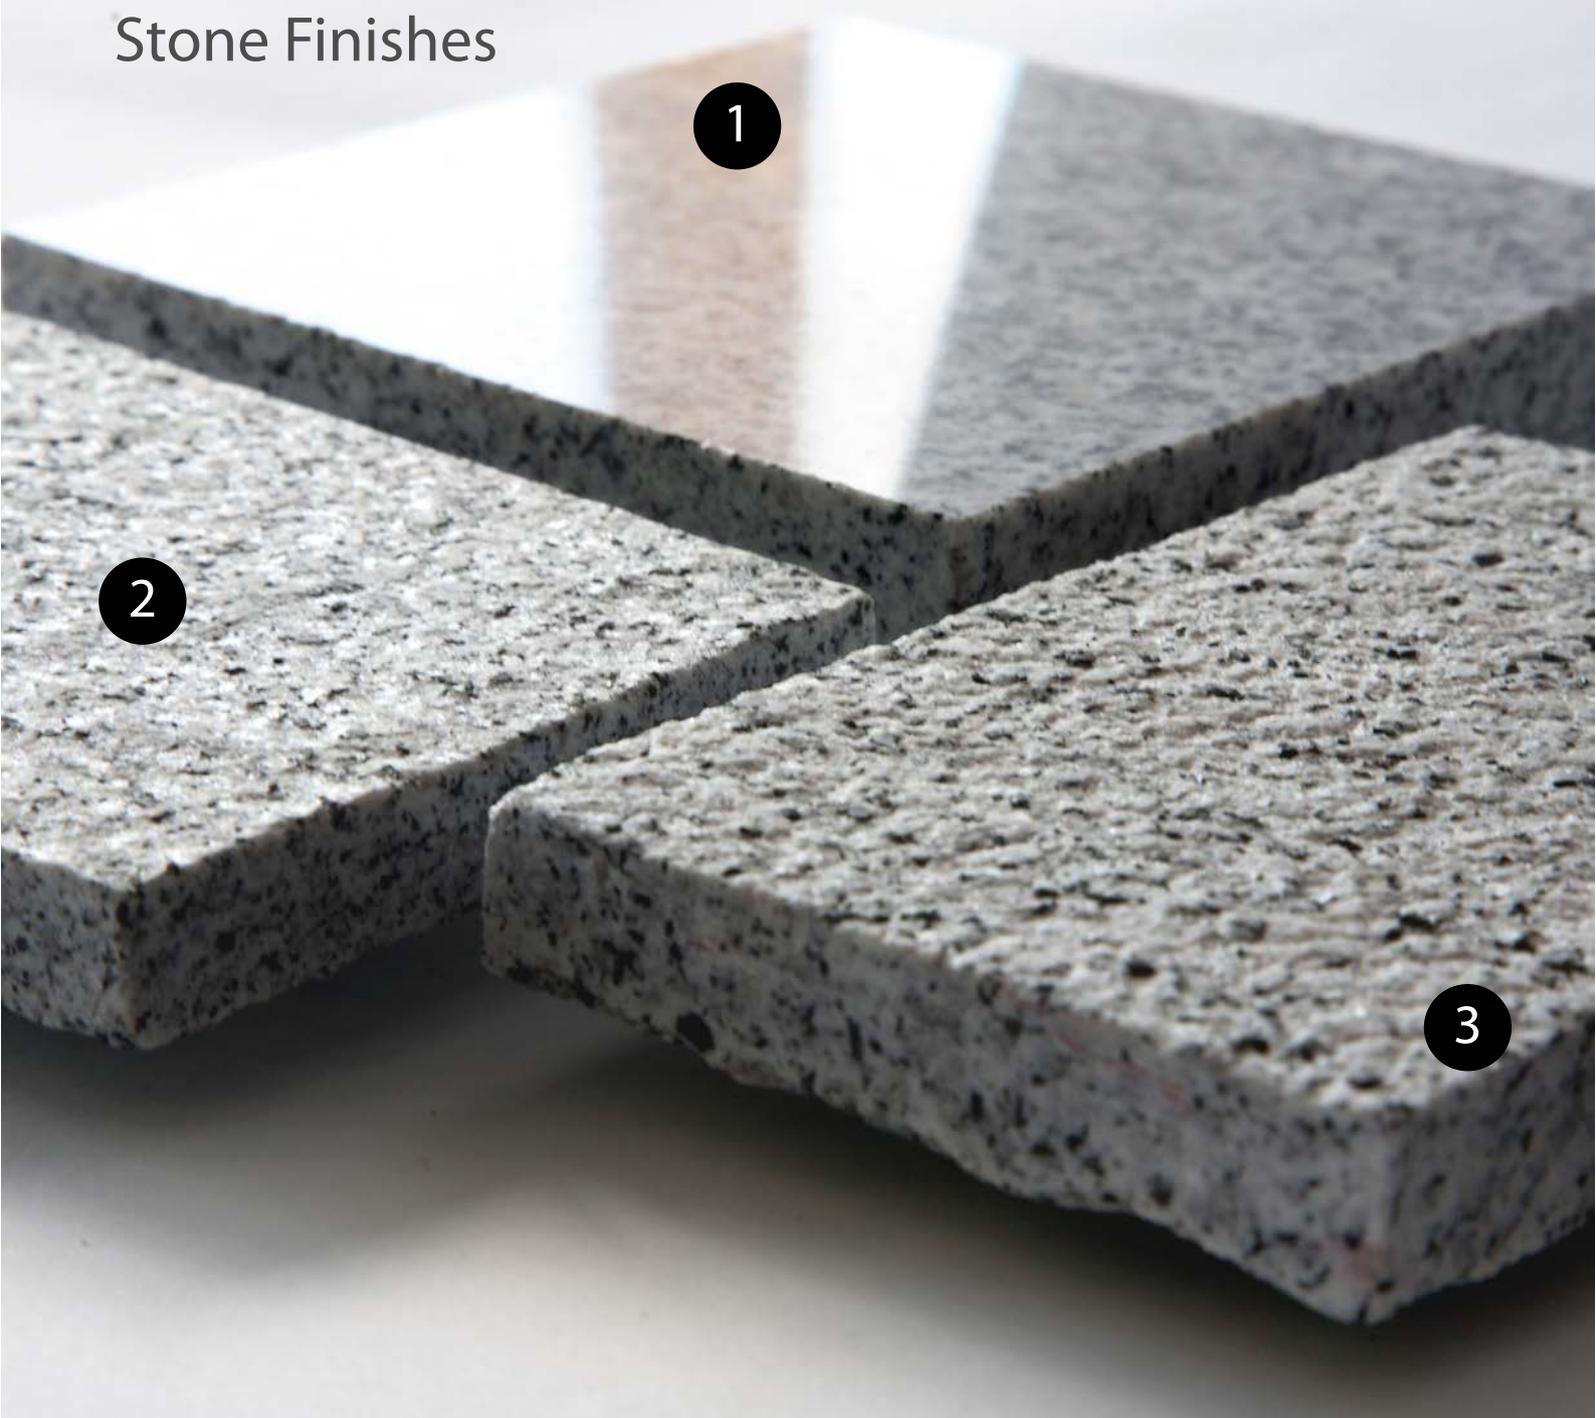

Each of the pieces shown above are Granite ref. G603, also referred to as Light Grey. The finishes are as follows:

- 1 **Polished** A polished finish gives the stone reflective properties. When viewed straight on, with no reflections, it appears slightly darker than the other finishes.
- 2 **Flamed** A flamed finish has a lightly textured surface. As the name suggests it is achieved by passing a flame across the surface causing the surface to flake leaving a random textured finish.
- 3 **Bush Hammered** Like the flamed finish a bush hammered finish is also textured though it is courser. The finish is achieved by repeatedly hammering the surface with a special tool to achieve a weathered like texture.