


# DULOK-25™

## DOUBLE WIRE SECURITY PANEL SYSTEM

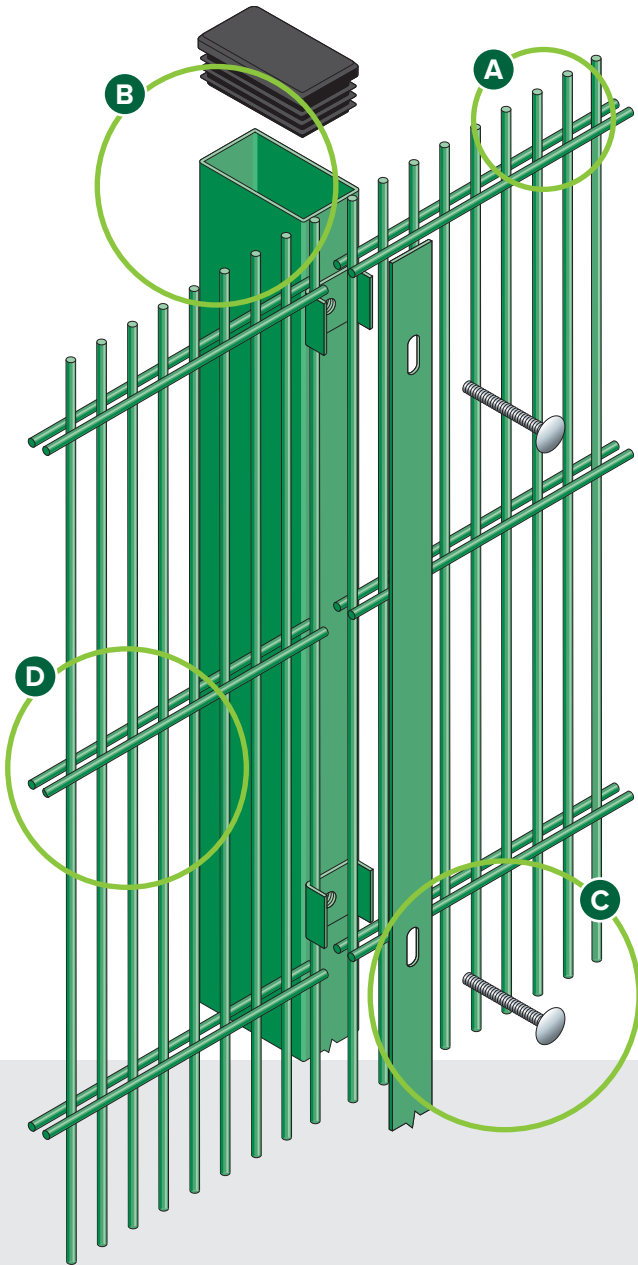


**A** Twin horizontal wires for anti-cut through properties and high rigidity

**B** Galvanised and polyester powder coated panels and posts

**C** Secure pin hex bolt for quick installation

**D** 25mm mesh aperture for maximum anti climb

Conforms to **BS1722: Part 14**



Sheardrive™ option



Exploded view of post and clamp for Dulok-25 double wire panel system



### FEATURES

- Anti-cut double wire panels
- Anti-climb
- Wide range of height options (up to 6090mm high)
- Full range of RAL colours available

### SUITABLE FOR

- Industrial and commercial buildings
- Public buildings
- MOD sites
- Police stations and secure units

### SYSTEM DETAILS

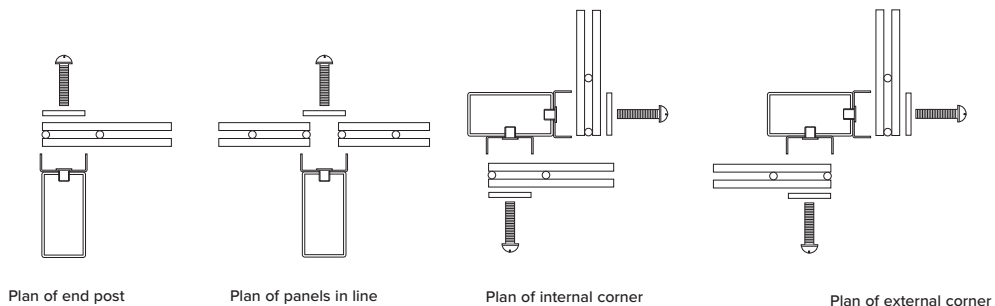



## DESCRIPTION

As one of the strongest and most impenetrable rigid mesh fencing systems on the market, the Dulok-25™ double wire panel system is a hugely popular perimeter choice when high security is vital.

Featuring two solid steel 8mm horizontal wires welded either side of 6mm vertical wires spaced just 25mm apart, Dulok-25™ double wire fencing is extremely dense and very difficult to cut through. Installation is quick and easy too, with panels fixed to each sturdy steel post using a full length clamp bar and pin hex security screws allowing stepping.

Available in heights up to 6090mm, it's the ideal choice for data centres, secure units, police stations and Ministry of Defence sites. Dulok-25™ also conforms to BS 1722-14 for open mesh steel panel fences and can be finished in a wide range of polyester powder coated RAL colours; including marine finish.

## FINISH

Our welded steel wire mesh fencing panels are either hot dip galvanised only or galvanised and polyester powder-coated. RAL range of colours available.

## PANEL DIMENSIONS

<b>Heights<sup>‡</sup></b>	1830, 2030, 2430, 3060, 4060, 4460, 5060, 5460, 6090mm
<b>Panel width</b>	2506mm
<b>Mesh size</b>	200 x 25mm
<b>Wire diameter</b>	6mm verticals 2 x 8mm horizontals
<b>Top edge projection</b>	30mm <sup>†</sup>


<sup>‡</sup> Fence heights above 2430mm are made up of 2 or more panels.

<sup>†</sup> Can be inverted to give flush edge.

All dimensions are nominal

## DULOK-25 POSTS AND CLAMPS

For the Dulok-25 double wire panel system, CLD has developed a post and clamp bar system which provides a simple method of securing. Complete with an anti-vandal fastener and installed with either a battery-powered driver or traditional tools, this system offers a rapid and secure installation.

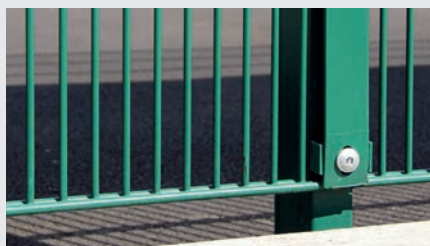

## SLOPING GROUND

Panels can be stepped as required within the clamp bar system. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

## VARIATIONS

The posts are available in a range of lengths to accommodate panel heights and ground conditions. In addition, many variations are available:

- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels



## DIMENSIONS

<b>Posts</b>	60 x 40mm RHS to 120 x 60mm RHS dependant on height
<b>Flat clamp bars</b>	40 x 5mm
<b>Post centres</b>	2520mm