


DULOK WAVETOP™

DOUBLE WIRE WAVE TOP PANEL SYSTEM

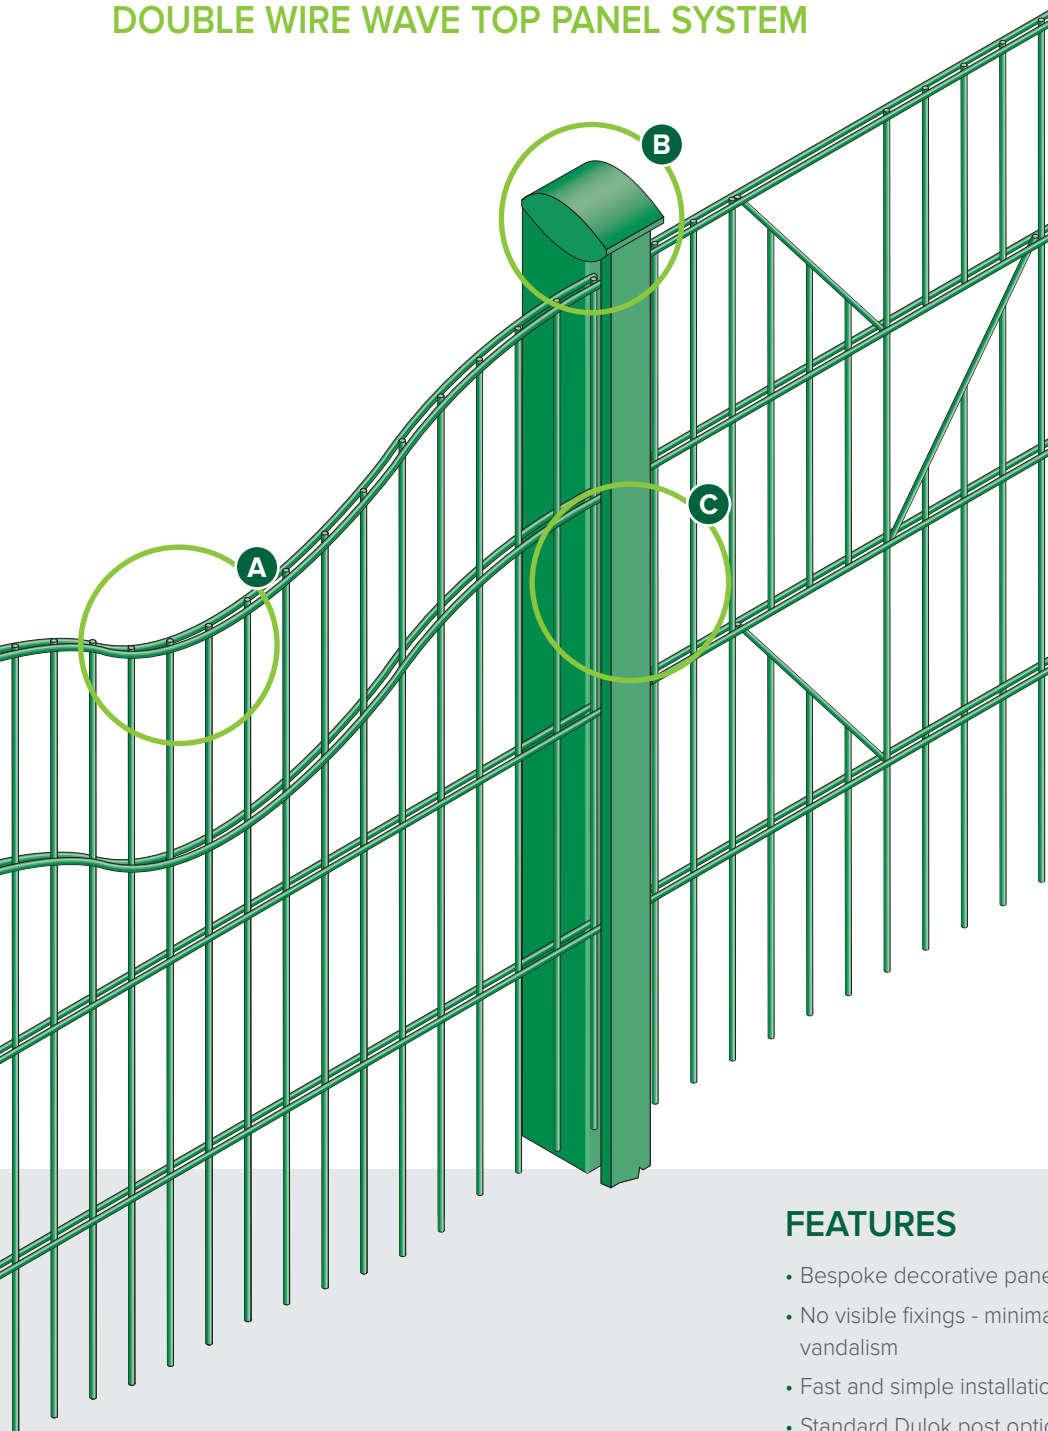

A

Rigid panel with 2 x 8mm horizontal wires either side of a 6mm vertical

B

Anti-vandal security cap

C

Hook on security clamp bar

Conforms to **BS1722: Part 14**




FEATURES

- Bespoke decorative panels available
- No visible fixings - minimal risk of vandalism
- Fast and simple installation
- Standard Dulok post optional
- Full range of RAL colours available


SUITABLE FOR

- Playgrounds
- Recreation grounds
- Parks
- Housing developments


SYSTEM DETAILS




Sheardrive® high security option before shearing




Sheardrive® high security option after shearing




Plan of end post



Plan of panels in line



Plan of internal corner



Plan of external corner

CALL 01270 764751 OR VISIT WWW.CLD-FENCING.COM



DESCRIPTION

You often need fencing that is safe, secure and at the same time being visually appealing, particularly around playgrounds, recreation areas and housing developments. This is exactly what the Dulok Wavetop™ offers; an attractive perimeter, available in a range of RAL colours, which also stands up to vandals.

Each steel panel of the Dulok Wavetop™ has twin 8mm wires welded either side of 6mm vertical wires. This double wire feature is the signature of our Dulok™ range, making panels stronger, more rigid and extremely tough to cut through.

The galvanised steel posts also feature an anti-vandal security cap and a clamp bar with no visible fixings, adding an essential level of safety for areas designed for children. You also have the added assurance that the Dulok Wavetop™ system conforms to BS 1722-14 for open mesh steel panel fences.

FINISH

Hot dip galvanised only or galvanised and polyester powder coated. The standard colour is Green RAL 6005. RAL range of colours available.

PANEL DIMENSIONS

Heights	From 830mm up to 2430mm high (in 200mm increments)
Panel width	2506mm
Mesh size	200 x 50mm
Wire diameter	6mm verticals / 2 x 8mm horizontals (also available in 2 x 6mm)
Post size	60 x 40mm RHS
Top edge projection	Nil – wire is flush on all edges

All dimensions are nominal

DULOK WAVETOP POSTS AND CLAMPS

For the Dulok Wavetop panel system CLD has developed a post and clamp bar system which provides a simple method of securing. Complete with an anti-vandal fastener, installed with either a battery-powered driver or traditional tools, this system offers a rapid and secure installation.

SLOPING GROUND

Panels can be stepped as required within the clamp bar system. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

VARIATIONS

The posts are available in a range of lengths to accommodate panel heights and ground conditions. In addition, many variations are available:

- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels

DIMENSIONS

Posts	60 x 40mm RHS (up to 2430mm)
Flat clamp bars	40 x 5mm
Post centres	2520mm

