


SLIDEMASTER SR2™

CANTILEVER SECURITY SLIDING GATE TO LPS 1175 CATEGORY 2

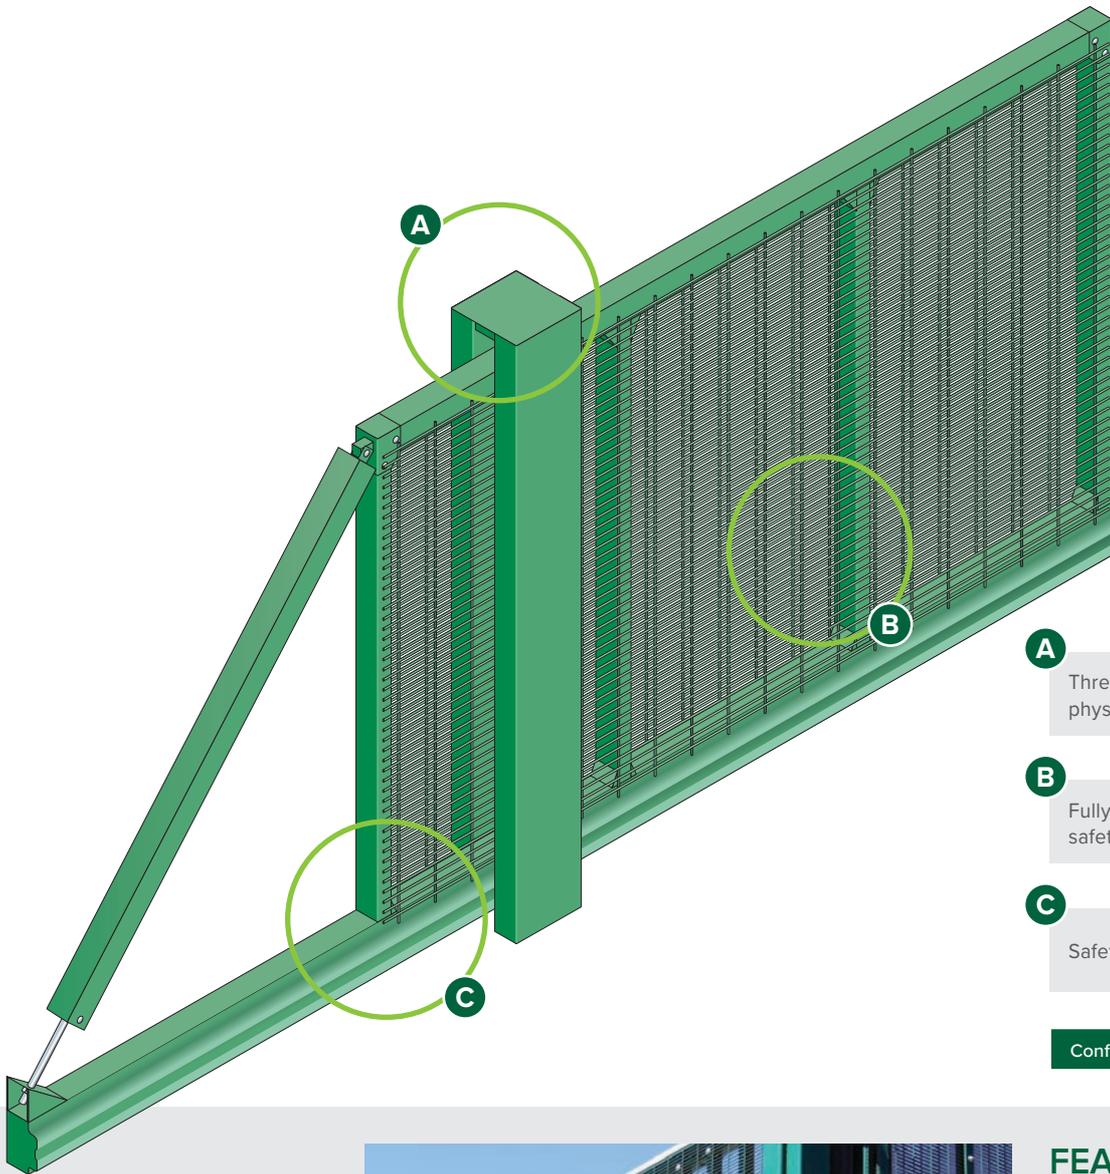

A Three minute delay on physical attacks

B Fully compliant to latest safety regulations

C Safety edges to all sides

Conforms to **BS EN 12453**



FEATURES

- Excellent visibility for CCTV
- Clear drive through widths up to 8000mm
- Fully compliant with safety regulations
- Full range of RAL colours available

SUITABLE FOR

- Secure compounds
- Controlled entry points
- Data centres
- Utility suppliers



DESCRIPTION

When greater levels of security are needed, SlideMaster SR2™ cantilever sliding gates give you that enhanced level of access protection. With double skinned mesh panels that are incredibly difficult to break through, you can be confident that your perimeter will withstand even sophisticated attacks from people or vehicles.

With certification to Loss Prevention Standards 1175 Security Ratings (SR2), SlideMaster SR2™ gates are proven to provide a full three minutes' delay time to physical attackers using mechanical tools. This makes them the ideal choice for sites including airports, seaports and Ministry of Defence premises.

The second most secure option in our SlideMaster™ range of sliding cantilever gates are made from heavy duty aluminium, with safety edges on all sides.

FINISH

Aluminium and polyester powder-coated. Available in the RAL range of colours.

DIMENSIONS

Gate width	2400mm up to 8000mm
Operating speed	Auto only

Please seek technical advice before specifying sliding gates.

All dimensions are nominal

SPECIFICATION CLAUSES

Please contact CLD on 01270 764751

