

EXTERNAL SCREEN CLASSIC

NATTÉ 4503



COLLECTION
2018
2021

INTELLIGENT FABRICS FOR SOLAR PROTECTION



EXTERNAL AND
INTERNAL APPLICATION

www.mermet.co.uk
01989 750910
info@mermet.co.uk

NATTÉ 4503

PERFECT GLARE CONTROL AND HEAT PROTECTION

96 %

OF SOLAR RADIATION REFLECTED

320 CM

LARGE-SIZED WINDOWS OFFERING A SEAMLESS DESIGN

- Maximum GLARE CONTROL: up to 97% OF LIGHT RAYS FILTERED ($T_v = 3\%$), comfort classification 3 (good effect) according to EN 14501 standard
- Excellent HEAT PROTECTION: up to 96% OF SOLAR RADIATION REFLECTED by external blinds ($g_{tot} = 0,04$ / glazing $g = 0,32$ and $U = 1,1$), comfort classification 4 (very good effect) according to EN 14501 standard
- ECONOMICAL: 2 WIDTHS (250 and 320 CM) to help reduce waste when manufacturing fabric panels
- Perfect match with side channels such as ZIP
- WEATHER-RESISTANT and UV fading resistant
- DIMENSIONAL STABILITY, DURABILITY (test of 10.000 cycles, class 3 NF EN 13561), MECHANICAL RESISTANCE: perfect flatness even in large dimensions
- Health & Safety: conforms to standard requirements for buildings open to the public

TECHNICAL DATA

NATTÉ 4503			
Composition	42% Fibreglass - 58% PVC		
Fire, smoke classification and other official test reports	M1 (F) - NFP 92 503 B1 (DE) - DIN 4102-1 Euroclass C-s3-d0 (EU) - EN 13501-1 mounted according to EN 13823 & EN 14716	BS (GB) - 476 Pt 6 & 7 Class 0 F3 (F) - NF F 16-101 HHV: 13,2 MJ/kg (7,39 MJ/m ²)	
Health, safety	Greenguard®: Guarantee of indoor air quality (VOC)		
Openness factor	3%		
UV screen	Up to 97%		
Widths	250 - 320 cm		
Weight/m ²	560 g ± 5% - ISO 2286 - 2		
Thickness	0,53 mm ± 5% - ISO 2286 - 3		
Colour Fasteness to light (scale of 8)	7/8 - ISO 105 B02 (white not graded)		
Mechanical resistance	Breaking	Tear	Folding
Warp	> 220 daN/5 cm	≥ 10 daN	≥ 120 daN/5 cm
Weft	> 200 daN/5 cm	≥ 9 daN	≥ 120 daN/5 cm
	ISO 1421	EN 1875-3	ISO 1421
Elongation (warp and weft)	< 5% - ISO 1421		
Packaging	Rolls of 52 lm - Width 320 cm: rolls of 33 lm		
Making up	Advice note on request		

This product's technical data are in conformity with this brochure as of the date of publication. MERMET SAS reserves the right to change the technical data; only those provided on the company's website www.sunscreen-mermet.com shall be deemed to be authentic. Where applicable, MERMET SAS also reserves the right to withdraw this product from sale should any of the technical properties or characteristics set out above prove to be inadequate or rendered impossible as a result of a change in regulations or in knowledge or understanding.

Reports available on request, please contact Mermet

Internal procedure derived from ISO 1421 standard

NATTÉ 4503

WIDTHS: 250 - 320 CM



Colours may be slightly different from the actual ones

SERVICE

- Calculation of solar factor g_{tot} (glazing + blind)
- Spectral values and thermal & optical factors available on request
- Specification sheet
- A4 samples and prototypes
- Training on fabrics functionality

3001



THERMAL AND OPTICAL FACTORS the European standard EN 14501

NATTÉ 4503 - OF 3%	Thermal factors					Optical factors
	Fabric			Fabric + Glazing / gtot external blind		Tv
Colours	Ts	Rs	As	C : gv = 0,59	D : gv = 0,32	
0202 White	18	68	14	0,14 ③	0,08 ④	18
0220 White Linen	18	61	21	0,13 ③	0,07 ④	17
0207 White Pearl	14	52	34	0,11 ③	0,07 ④	13
0702 Pearl White	14	50	36	0,10 ③	0,07 ④	12
0720 Pearl Linen	14	44	42	0,10 ③	0,07 ④	12
0210 White Sable	14	54	32	0,10 ③	0,07 ④	11
0707 Pearl	12	37	51	0,09 ④	0,06 ④	11
0710 Pearl Sable	12	39	49	0,09 ④	0,06 ④	10
0201 White Grey	10	42	48	0,08 ④	0,04 ④	7
0701 Pearl Grey	9	29	62	0,07 ④	0,05 ④	7
0102 Grey White	8	38	54	0,07 ④	0,04 ④	6
0110 Grey Sable	7	29	64	0,06 ④	0,05 ④	5
0101 Grey	6	20	74	0,05 ④	0,04 ④	4
3006 Charcoal Bronze	4	7	89	0,05 ④	0,04 ④	4
3030 Charcoal	4	6	90	0,05 ④	0,04 ④	4
3001 Charcoal Grey	4	11	85	0,05 ④	0,04 ④	3

gv = 0,59: Solar factor of standard glazing (C), low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,2 W/m²K).

gv = 0,32: Solar factor of standard glazing (D), reflecting low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,1 W/m²K).

Classification according to EN 14501 standard: ① very little effect ② little effect ③ moderate effect ④ good effect ⑤ very good effect


Samples tested according to EN 14500 standard defining the measurements and calculation methods as specified in the standard EN 13363-2 "Solar protection devices combined with glazing calculation of solar and light transmittance - part 2: EN 13363-2 detailed method" and EN 410 "Glass in building - Determination of luminous and solar characteristics of glazing".

NATTÉ 4503


3001



EXTERNAL AND INTERNAL APPLICATIONS

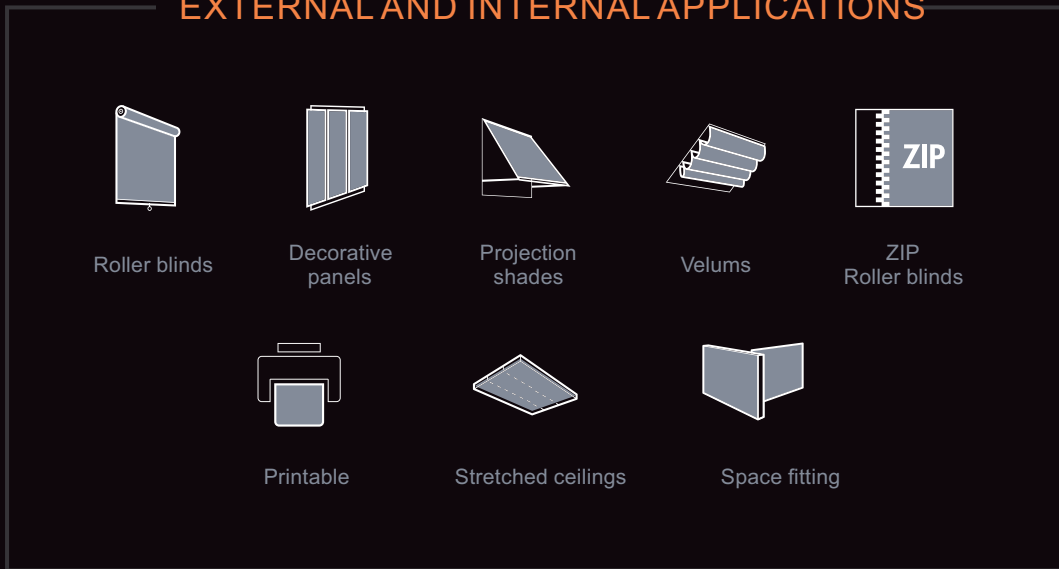


www.mermet.co.uk

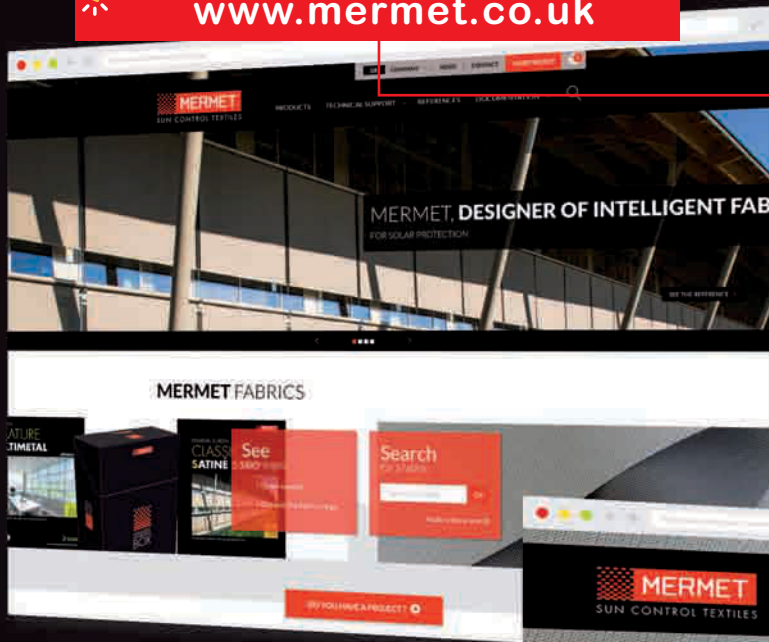

FIND IN 3 CLICKS THE FABRIC BEST SUITED to your project

- A search engine with performances criteria
- Many documents for download
- All products information available
- A library of references

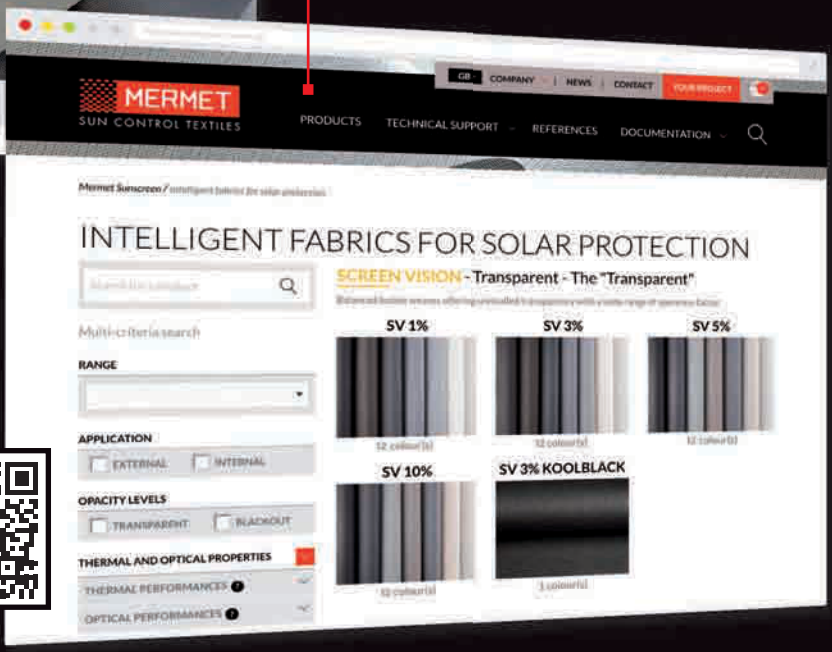

Go directly to the
products catalog >



MERMET COLLECTION offers a wide choice of fabrics for external and internal application, from transparency to total darkness, for thermal and optical comfort.
To receive other brochures from the collection, contact us



SCREEN VISION / DESIGN / THERMIC / LOW

EXTERNAL SCREEN CLAS

SCREEN NA

BLACKOUT 100 %

ACOUSTIC



MERMET U.K. Ryeford Hall , Ryeford , Ross-on-Wye HR9 7PU
Phone 01989 - 750910 Fax 01989 750768 info@mermet.co.uk

This brochure must be read and interpreted in accordance with the General Terms & Conditions of Sale of MERMET SAS, with which it forms an indissoluble whole. The General Terms & Conditions of Sale that are current at any time are those contained on the MERMET SAS website at the following address: www.sunscreen-mermet.com.