



C A B U C H O N[®]

B A T H f o r m s

SERENITY INSET & UNDERMOUNT BATHS

These baths are supplied with only waste & overflow holes drilled in order to allow options on jobsite in the positioning of spouts, taps, handshowers & whirlpool controls. The only rule is good plumbing.


These baths are usable mounted in a deck or undermounted to a deck. Do not support the weight of the bath by its rim on a deck. The bath has four screw adjustable feet allowing a variation in height of 50mm/2". Maximum height of feet is 140mm/5½".

All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are + or -3mm.

NORMAL WATER REQUIREMENT – SEE BOX BELOW RIGHT

There are four different length sizes of bath.
For dimensions of each size bath see box below left.

KEY TO ALL SIZES: ■ Millimetres □ Inches to nearest ¼"

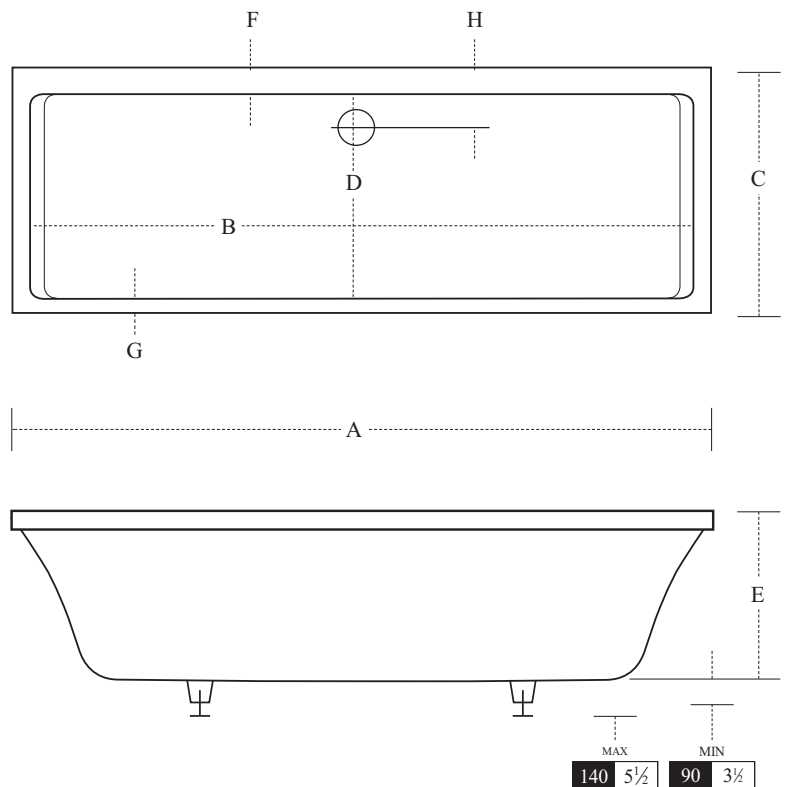

BATH NAME	1700	1760	1800	2000
A External Length	1700	1760	1800	2000
	67	69½	71	78¾
B Inner Length - Top	1560	1620	1660	1840
	61½	64	65¼	72½
B Inner Length - Bottom	1050	1080	1120	1300
	41¼	42½	44	51
C External Width	810	810	810	850
	32	32	32	33½
D Internal Width - Top	630	630	630	660
	24¾	24¾	24¾	26
D Internal Width - Bottom	560	560	560	585
	19¾	19¾	19¾	23
Head Slope Length	65	75	75	90
	2¾	3	3	3½
E Depth	480	480	480	495
	19	19	19	19½
F Rear Rim Width	110	110	110	125
	4¼	4¼	4¼	4¾
G Other Rims Width	70	70	70	80
	2¾	2¾	2¾	3
H Waste Location from rim exterior	260	260	260	275
	10¼	10¼	10¼	10¾

Because Serenity baths are primarily inset or undermount we do not supply standard panels.

If commissioned to do so we can provide bespoke panels - either loose (but in one piece no matter how many sides, to ensure stability and rigidity) or as an integral part of the bath's body - if the objective is to make the bath free standing. This is illustrated on the website www.cabuchon.com

Size	Litres	Imperial Gal.	US Gal.
1700	288	63	76
1760	298	65	78
1800	304	67	81
2000	365	80	96