



C A B U C H O N[®]
B A T H f o r m s

Product page: <https://www.cabuchon.com/product/calyx-deep-soaking-bath-tub/>

Tel.: +44 (0) 1524 66022 Fax: +44 (0) 1524 844927

E-mail: info@cabuchon.com Website: <https://www.cabuchon.com/>

CALYX DEEP SOAKING BATH (1230 & 1440 models)

Specification Sheet

Bathing Depth (1230)

In well: 530 mm/20 3/4"

At seat: 405 mm/15 3/4"

Bathing Depth (1440)

In well: 530 mm/20 3/4"

At seat: 405 mm/15 3/4"

Note: Manufacturing tolerances are + or - 3 mm.

Measurements:

Calyx 1230

A: Ext. length	1230 48 1/2
B: Inner length - top	1090 43
C: Inner width - top	675 26 1/2
D: Ext. width	815 32
E: Seat length	300 11 3/4
F: Well length	580 23
G: Well width	560 22

Calyx 1440

A: Ext. length	1440 56 3/4
B: Inner length - top	1300 51
C: Inner width - top	710 28
D: Ext. width	850 33 1/2
E: Seat length	400 15 3/4
F: Well length	680 26 3/4
G: Well width	590 23 1/4

(Continued overleaf.)

MAXIMUM WATER REQUIREMENT:

1230 model: 177 Litres, 39 Imperial Gallons, 47 US Gallons


1440 model: 218 Litres, 48 Imperial Gallons, 58 US Gallons

WEIGHT:

1230 model: 30 kg/66 lbs (empty). 207 kg/456 lbs (filled to overflow.)

1440 model: 33 kg/73 lbs (empty). 251 kg/554 lbs (filled to overflow.)

KEY TO SIZES: ■ Millimetres Inches to nearest 1/4"

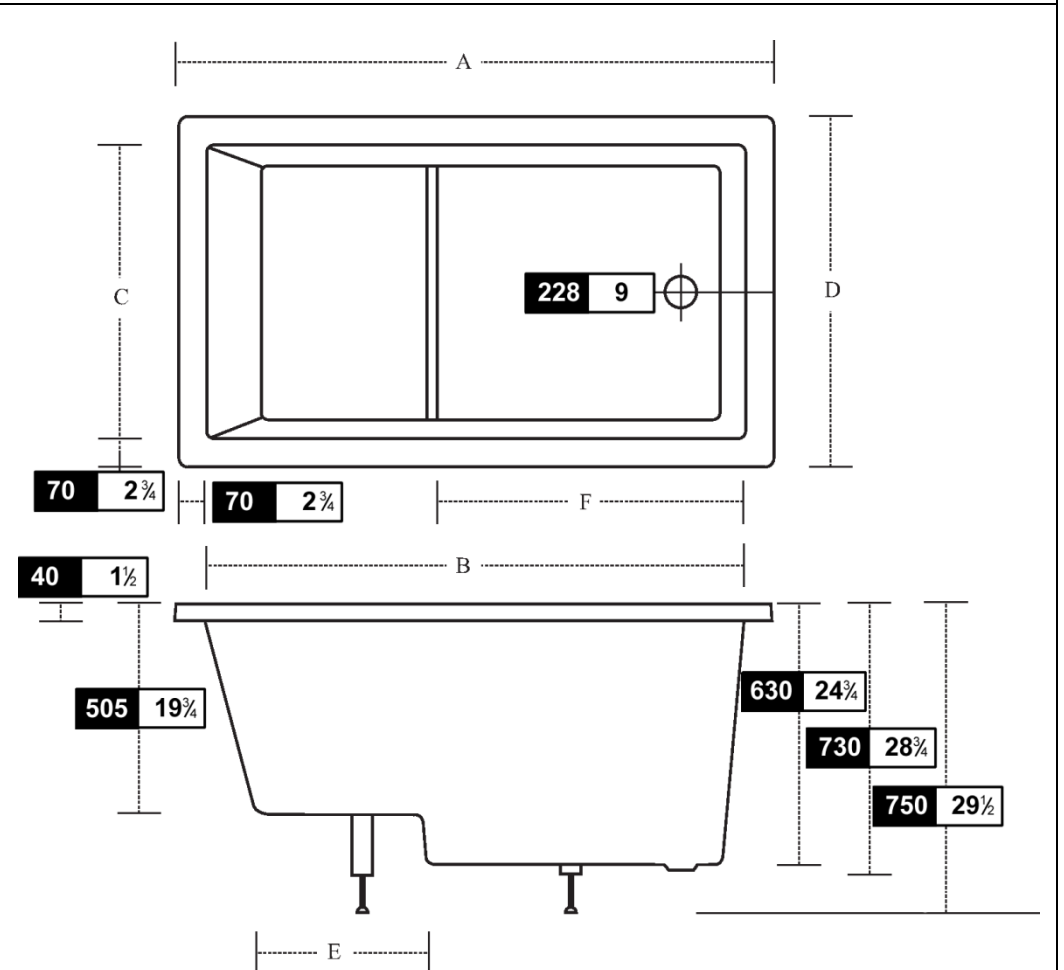

Registered office: Whitegate, Lancaster LA3 3BT, England

Cabuchon is a registered trademark of Design & Form Ltd. Cabuchon Bathforms is a division of Design & Form Ltd.

Pre-installation

There is no difference in practical construction terms and in plumbing between installing a deep soaking tub and a standard bathtub. The only rule is good plumbing. However, the differences in terms of the space required need more forethought. Each of our deep soaking tubs, turned on its side, will pass through a standard door of 29"/ 737mm. It may be necessary otherwise to remove the door's side panels or architraves, to make a wider gap. However, one of the major properties of our Ficore® composite, from which we build our baths, is that, to a small degree, it permits us to modify the external dimensions of a rectangular bath by building it with narrower or wider rims. You are not therefore tied to the exact dimensions on the specification sheet. See our [FAQs](#) for more details.

External Step

Fitting an external step to aid entry and exit from the bath is optional but not essential. If a step is to be fitted then its dimensions should be chosen to suit the user's individual requirements.

Installation

The Calyx can be installed sunken or semi sunken into a deck, or inset (drop-in), undermounted, or free standing with panels. If not sunken a step is optional to aid access. The step can be fixed or removable when not in use. In addition to the photographs shown on this page, there are other photographs of the Calyx, kindly sent to us by clients, in our '*What our customers say*' section. The Calyx integral steel chassis has four screw adjustable feet which allow a height adjustment of 20mm (1") between 750 mm/29½" maximum and 730 mm/28¾" minimum. Common questions regarding installation are answered on our web page: <https://www.cabuchon.com/faqs/>.

Panels

We do not supply panels as standard because there are many possible styles and variations available to suit different décors. However, we are happy to do so on a bespoke basis. Panels are fabricated in Ficore® and they can be supplied either loose or integral to the bath. If the former, then for reasons of or security and stability, they are supplied in one piece - no matter how many sides are required.

Hydrotherapy Systems

The Calyx deep soaking tub was designed to be fitted with one of our optional hydrotherapy systems, in order to deliver an even greater degree of pleasure and comfort, and also to act as an aid to health. For details, specifications and illustrations, please refer to the Hydrotherapy section of our website. See: <https://www.cabuchon.com/hydrotherapy/>

Waste/Overflow

Due to its greater depth, the Calyx requires an extended waste/overflow - meaning that it requires a longer than standard cable to operate the plug. We ship the bathtub with waste and overflow holes drilled; located as specified by the codes and regulations of the country where the bathtub is to be installed. These permit the overflow hole to be located facing the seated bather, or in the left or right hand walls of the well. We do not undertake to ship a bathtub with other predrilled holes. These should all be drilled on site to avoid possible miscommunication and error.

Note: We keep a small stock of combined filler/overflows, which remove the need for a spout.

Grab Bars

The bathtub is strong enough to take the fitting of grab bars of any shape and size, at any location. Again, we recommend that these are only fitted on site after the user has had the opportunity to trial it *in situ*.

Copyright Design

The Calyx is a registered design of the company and is covered by copyright. The company, being committed to continuous innovation and improvement, reserves the right to change product specifications without notice.

Registered office: Whitegate, Lancaster LA3 3BT, England

Cabuchon is a registered trademark of Design & Form Ltd. Cabuchon Bathforms is a division of Design & Form Ltd.