


For Professional use only

## MARLDON MXW640 HARDWAX OIL INTENSE

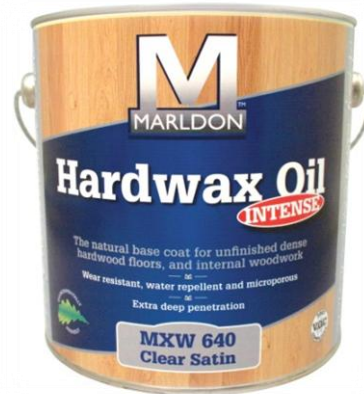

## PRODUCT DESCRIPTION

MARLDON HARDWAX OIL INTENSE is a **special wood finish for all interior wood**, which allows a particularly deep and easy penetration into the wood surface..It is, therefore, **indispensable for the treatment of hardwoods/ exotic woods, especially on floors.**

MARLDON HARDWAX OIL INTENSE is ideal for wood in moist surroundings like bathrooms and kitchens. Environmentally friendly, complying with the natural demands of the wood. Based on natural raw materials, moisture regulating and allows the wood to breathe (like the human skin). The wood retains it's natural beauty.

**One coat** of MARLDON HARDWAX OIL INTENSE will normally be sufficient. The satin surface can be polished for a more satin sheen after drying. MARLDON HARDWAX OIL INTENSE is low in odour and odourless when dry.

MARLDON HARDWAX OIL INTENSE protects the wood naturally:

**The oils** penetrate deeply into the wood surface, protecting it from inside and keeping it healthy and elastic.

**The waxes** protect, making it resistant and easy to maintain. Wood treated with MARLDON HARDWAX OIL INTENSE is water and dirt-repellent, wear-resistant and easy to maintain. Coffee, wine or aggressive fruit juices cannot penetrate, and can therefore be easily removed from the surface which is resistant to household chemicals. Moisture cannot impair the microporous finish.

MARLDON HARDWAX OIL INTENSE becomes part of the wood and does not crack, flake, peel or blister - it can be retreated without sanding.

## USAGE GUIDELINES

### **Preparation**

Surface must be clean and dry (max. humidity 18%). Remove all varnishes. Final sanding grain 120-150. Remove dust carefully. Oiled or waxed surfaces need only to be cleaned. If possible treat new wood on all sides before installation. Ideal temperature for application between 8°C and 35°C.

### Application

Apply with Marldon applicator brush, Marldon short-haired roller or lint free cloth. Can also be applied by dipping or spraying. MARLDON HARDWAX OIL INTENSE is ready to use – do not thin, stir before use. Apply **evenly** along wood grain. Leave to dry approx. 20 minutes and remove surplus material with a lintfree cotton cloth (on floors remove surplus material with a white pad or a lintfree cotton cloth). **Drying** approx. **8 hrs** (depending on temperature and air humidity). Dust-dry after approx. 4 hrs. For panellings on walls and ceilings one coat will normally be sufficient. For furniture, especially hard used work and table tops, a second coat is recommended.

**For second (final) coat on hardwood/exotic floors use Marldon Hardwax Oil MXW 620 Satin or MXW630 Ultra Matt.**

**Clean tools** with a recommended brush cleaner (disaromatized = low odour).

### Simple to clean, easy to maintain

Wood surfaces treated with MARLDON HARDWAX OIL INTENSE do not require any special care. Wipe off dust with a dry or moist cloth. To remove persistent stains or to freshen up heavily used surfaces, use our Marldon Liquidwax Care MXC 700.

### Renovating

Is also very easy. Just apply another coat on a clean, dry surface.

### Fields of application

**All species and uses of wood in the interior:** panellings of walls and ceilings, furniture, doors, mouldings, plywood and laminated wood, beams, counter and table tops – and all other wooden objects.

**For wood and built-in furniture in moist surroundings like kitchens and bathrooms,** because moisture will not impair the microporous, water-repellent surface.

**Especially recommended for the restoration of antique furniture.** Enlivens fixivated wood surfaces and makes them resistant and easy-care. It is safe for children's toys.

**Indispensable for the treatment of hardwoods/exotic woods** like Smoked Oak, Meranti, Wengé, Merbau, Jatoba, because of its deep and easy penetration. For second (final) coat on floors use Marldon Hardwax Oil MXW 620 Satin or MXW630 Ultra Matt.

### Health and environment

Natural vegetable oil and wax based ingredients: Carnauba and Candelilla waxes, paraffins, sunflower, soybean and thistle oils. Lead free siccatives (drying agents). Water-repellent additives. Volatile matter disaromatized test petroleum (benzene-free, aliphatic – low odour). Complies with the purity demands of the European pharmacopoeia.

### Storage properties

Can be stored at least 5 years in a closed container. Frost resistant. If thickened by frost, store at room temperature for some hours to regain normal consistency.



## COVERAGE CAPACITY

### **Coverage capacity per litre:**

1L = approx. 13.5m<sup>2</sup> with 2 coats = approx. 23.0m<sup>2</sup> with 1 coat

### **Can sizes and coverage:**

2.5L = approx. 33m<sup>2</sup> with 2 coats = approx. 57m<sup>2</sup> with 1 coat (dependent upon wood species and state of surface)

## HEALTH AND SAFETY

**Caution:** Keep out of the reach of children. Do not bring into contact with victuals and animal food. In case of contact with eyes rinse immediately with plenty of water and seek medical advice. If swallowed seek medical advice and produce packing or label. Do not apply in the presence of naked flames. - Wash out any used cloth immediately or store in airtight container (danger of combustion). - After drying normal inflammable (EURONorm EN 13501 - DIN 4102).

Refer to Health and Safety data sheet for further information.