

PROFABACCESS 

TRUSTED ACCESS SOLUTIONS



ACCESS PANELS for ceilings & walls

4000
series

RISER DOORS

TRUSTED
PERFORMANCE 



TRUSTED ACCESS SOLUTIONS



NBS National BIM LIBRARY

Single, Double & Continuous Riser Doors

Tested & certified to meet and exceed internationally recognised standards, up to 4 hours fire rated.

See pages 8 - 9 for more details.



Information Pages	4 - 5
● 1000 Series Non Fire Rated Access Panels For Ceilings & Walls	6
●● 1000 Series Fire Rated Access Panels For Ceilings & Walls	7
●● 4000 Series High Performance Fire Rated Riser Doors	8 - 9
● 6000 Series Non Fire Rated Circular Access Panels For Ceilings	10
●● 8000 Series Fire Rated & Non Fire Rated Access Panels For Tiled Walls	11
●● 9000 Series Fire Rated & Non Fire Rated Access Panels For Clean Rooms	12
●● Domestic Metal Loft Hatch - Fire Rated & Non Fire Rated	13
● General Purpose Plastic Access Panels	14

BROCHURE KEY

- Non Fire Rated products not tested for fire rating performance
- Fire Rated independently tested under laboratory conditions by EXOVA WARRINGTON
- CERTIFIRE Rated independently tested under the CERTIFIRE scheme by EXOVA WARRINGTON
- UL Rated independently tested to US & CANADIAN standards by UNDERWRITERS LABORATORIES CHICAGO

PRODUCT INFORMATION

SD - Single Door DD - Double Door All sizes in mm All weights in Kg X & Y - Size (Y - Hinge side)

NEXT WORKING DAY DELIVERY

Call our sales team, ask for details of your local distributor or secure checkout online.

PRODUCTS LISTED IN THIS BROCHURE ARE DESIGNED & MANUFACTURED FOR INTERNAL USE ONLY, PLEASE CALL OUR TEAM FOR OTHER ACCESS PRODUCTS INTENDED FOR USE IN EXTERNAL APPLICATIONS

FIRE INTEGRITY AND PERFORMANCE RATINGS



Current 1 hour fire rating certificate from Exova Warrington or 1 hour option



Current 2 hour fire rating certificate from Exova Warrington under the CERTIFIRE scheme



Indicates a Non Fire Rated Product or Zero rated option



Current 4 hour fire rating certificate from Exova Warrington under the CERTIFIRE scheme



Current 1 hour fire rating certificate from Exova Warrington under the CERTIFIRE scheme



Current 2 hour fire rating certificate from UL Labs Chicago

PRODUCT FEATURES & OPTIONS

Frame Profiles



Beaded Frame (BF) - fully concealed frame for dry lining & skim plaster applications



Picture Frame (PF) - 25mm (standard width) visible frame to all sides



Deep Plaster Frame (DPF) - fully concealed frame for lath & plaster applications (bespoke option to order only)



Dutch Folded Frame (DFF) - slim visible frame to all sides (bespoke option to order only)

Locking & Safety



3 Point Lock High Security



Security Lock



2 Point Lock Euro Profile



Push Catch



3 Point Lock T Bar Key



Concealed Escutcheon



Budget Lock



Gas Strut



Safety Handrails

Finishes



Suitable to roller paint to match surround (as desired)

BUILDING INFORMATION MODELLING

Profab Access products are available to download for inclusion in your current and future projects from the NBS National BIM Library.

Objects are free to download upon registration.
Available in IFC & REVIT formats:

https://www.nationalbimlibrary.com/en-gb/profab_access

Also accessible from RIBA Product Selector



NBS National BIM Library



BuildingSMART IFC





If the product you require is not listed, please contact our technical department to discuss your requirements.

RELATED CAD & BESPOKE PRODUCT RENDERS

2D to scale DWG detail drawings are also available to download, after registration, from the Profab Access website.

For bespoke products, we liaise with the architect/specifier to produce example drawings. Example 3D product renders may also be considered and supplied upon request.

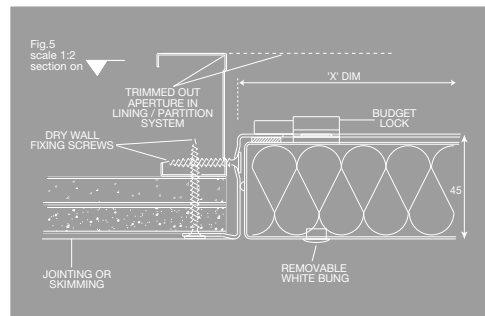


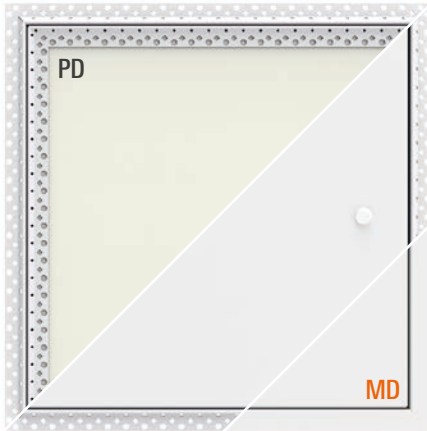

SPECIFICATION

- ❑ Slimline 35mm deep (MD version only)
- ❑ Plasterboard Door PD 55mm deep
- ❑ Standard sizes available next working day
- ❑ 1.2mm electro-galvanised mild steel
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Concealed hinges & lock options
- ❑ Frame options to suit finishing requirements
- ❑ Simple pivot device for easy door removal
- ❑ Dust seal gasket
- ❑ Fully matt powder coated, suitable for finishing on site

FEATURES & OPTIONS

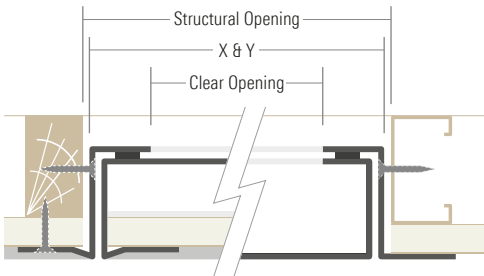


EXAMPLE ORDER CODE

1000-NFR-BF-MD-BL-SD-600x600

	Walls	Ceilings	NFR	1FR	BF	PF	MD	PD	BL	SL	PC
MD	●	●	●		●	●	●		●	●	●
PD	●	●	●		●			●	●	●	

Standard Size	Structural Opening	Clear Opening MD	Clear Opening PD	Depth	Weight MD	Weight PD
200 x 200	205 x 205	140 x 150	100 x 155	MD 35 / PD 55	1.25	2.24
300 x 300	305 x 305	240 x 250	200 x 255	MD 35 / PD 55	2.3	4.31
300 x 600	305 x 605	240 x 550	200 x 555	MD 35 / PD 55	3.55	6.92
450 x 450	455 x 455	390 x 400	350 x 405	MD 35 / PD 55	4	7.58
550 x 550	555 x 555	490 x 500	450 x 505	MD 35 / PD 55	5.75	9.96
600 x 600	605 x 605	540 x 550	500 x 555	MD 35 / PD 55	6	11.08
600 x 900	605 x 905	540 x 850	500 x 855	MD 35 / PD 55	8.75	15.41
900 x 900	905 x 905	840 x 850	N/A	MD 35	9.6	N/A
600 x 1200	605 x 1205	540 x 1150	500 x 1155	MD 35 / PD 55	10.5	19.42

Bespoke sizes upon request

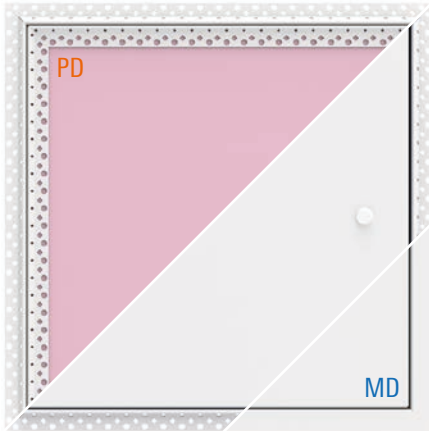

SPECIFICATION

- ❑ Trusted, certificated fire ratings
- ❑ Slim frame depth 45mm, MD - Metal Door Version
- ❑ Standard sizes available next working day
- ❑ 1.2mm electro-galvanised mild steel
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Concealed hinges with lock options
- ❑ Frame options to suit finishing requirements
- ❑ Simple pivot device for easy door removal
- ❑ Intumescent gasket
- ❑ Fully matt powder coated, suitable for finishing on site




FEATURES & OPTIONS



EXAMPLE ORDER CODE

1000-1FR-BF-MD-BL-SD-600x600


**Not available as a ceiling panel where noted.

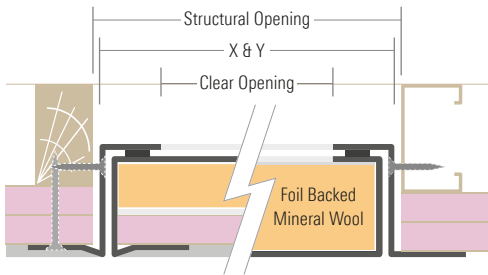

	Walls	Ceilings	NFR	1FR	BF	PF	MD	PD	BL	SL	PC
MD	●	●		●	●	●	●		●	●	
PD	●	●		●	●			●	●	●	

Standard Size	Structural Opening	Clear Opening MD	Clear Opening PD	Depth	Weight MD	Weight PD
200 x 200	205 x 205	130 x 150	100 x 155	MD 45 / PD 55	1.95	2.87
300 x 300	305 x 305	230 x 250	200 x 255	MD 45 / PD 55	3.44	5.07
300 x 600	305 x 605	230 x 550	200 x 555	MD 45 / PD 55	5.53	8.16
450 x 450	455 x 455	380 x 400	350 x 405	MD 45 / PD 55	6	8.85
550 x 550	555 x 555	480 x 500	450 x 505	MD 45 / PD 55	7.95	11.73
600 x 600	605 x 605	530 x 550	500 x 555	MD 45 / PD 55	8.84	13.05
600 x 900	605 x 905	530 x 850	500 x 855**	MD 45 / PD 55	12.3	18.14
600 x 1200	605 x 1205	530 x 1150	500 x 1155**	MD 45 / PD 55	15.5	22.87

Bespoke sizes upon request



2PL/CE - Concealed Escutcheon

Sits flush with door face & supplied to door finish or with signage. A quarter turn to remove to access the lock.



3HS - High Security


Three point lock with high security Euro Profile cylinder combined with T Bar key operation.



SHR - Safety Handrails

Removable safety handrails fitted to the frame rear where void access requires caution.

BESPOKE DOOR CONFIGURATIONS

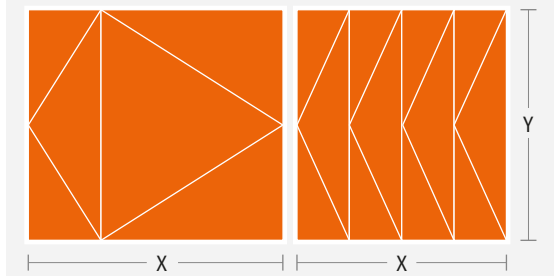


EXAMPLE ORDER CODES

4000-4FR-BF-2PL-SD-600x600

4000-4FR-PF-3HS-DD-1200x1800

Sizes in mm | Weights in Kg

FRAME PROFILE OPTIONS


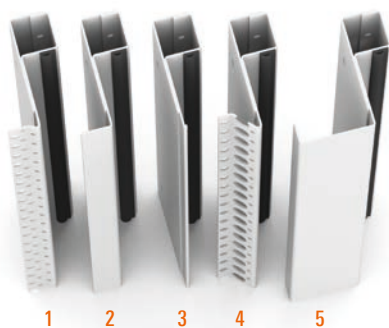


TO SUIT APPLICATION

- 1 BF: Beaded Frame **S**
Ideal for Tape & Jointing/Skimming
- 2 PF: Picture Frame **S**
Ideal for Retro Fitting/Finished Areas
- 3 DFF: Dutch Folded Frame **O**
Ideal for Masonry/Blockwork
- 4 DPF: Deep Plaster Frame **O**
Ideal for wet plastering/float and set
- 5 VRA: Visible Raised Architrave **O**
Ideal for Retro Fitting/Finished Areas & Creating Shadow Gaps

Skirting profile also available upon request.

S Standard frame **O** Optional frame

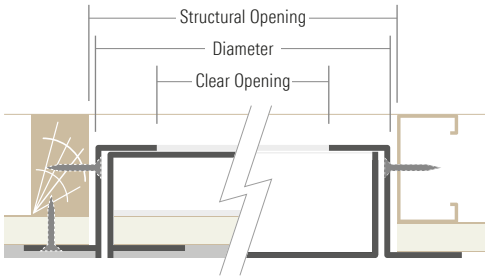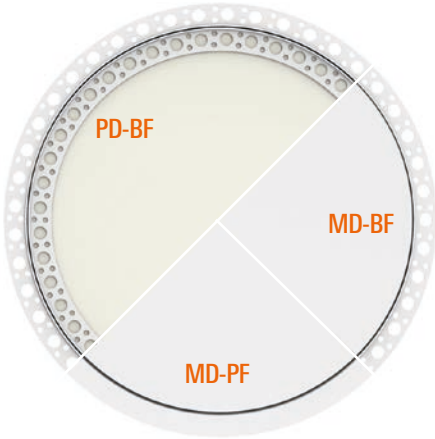

SPECIFICATION

- ❑ Slimline only 35mm deep
- ❑ Manufactured to order
- ❑ Suitable for ceilings
- ❑ 1.2mm electro-galvanised mild steel
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Frame options to suit finishing requirements
- ❑ Fully matt powder coated, suitable for finishing on site

OPERATION

This product is a **TWIST TO OPEN & LIFT OUT** access panel.

FEATURES & OPTIONS



EXAMPLE ORDER CODE

6000-NFR-BF-MD-BL-600

	Walls	Ceilings	NFR	1FR	BF	PF	MD	PD	BL	SL	PC
MD		●	●		●	●	●				
PD		●	●		●			●			

Typical Diameter Size	Structural Opening	Clear Opening MD	Clear Opening PD	Depth	Weight MD	Weight PD
200	205	160	145	MD 35 / PD 50	0.3	1.21
300	305	260	245	MD 35 / PD 50	0.5	2.02
450	455	410	395	MD 35 / PD 50	1	4.86
600	605	560	545	MD 35 / PD 50	1.5	6.12
900	905	860	845	MD 35 / PD 50	Please call	Please call




SPECIFICATION

- ❑ Slim frame depth 76.5mm
- ❑ Marine Ply (MP) fitted as standard
- ❑ Glass Reinforced Gypsum (GRG) option
- ❑ Custom manufactured to order
- ❑ 1.5mm electro-galvanised mild steel
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Concealed adjustable hinges with lock options
- ❑ Compression seal gasket
- ❑ Fully powder coated

FIRE RATED VERSION IS AVAILABLE UPON REQUEST 

FEATURES & OPTIONS

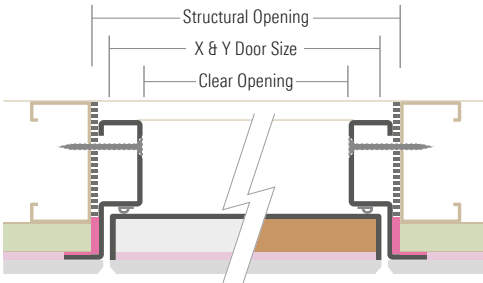

EXAMPLE ORDER CODE

8000-NFR-BL-SD-642x642 (Door Size)

	Walls	Ceilings	NFR	1FR	2FR	4FR	SD	DD	BL	SL	PC
SD	●		●				●		●	●	●
DD	●		●					●	●	●	●


EXAMPLE DOOR SIZE CALCULATION - Please call for structural opening dimensions

Door Width X Dimension

- Tile Width: 319mm
- Number of tiles along width: 2
- Grout width: 4mm
- Number of grout lines along width: 1



Door Width Y Dimension (Vertical hinge side)

- Tile Height: 319mm
- Number of tiles along height: 2
- Grout width: 4mm
- Number of grout lines along height: 1



IMPORTANT

Please specify tile thickness & tile adhesive thickness at time of order.

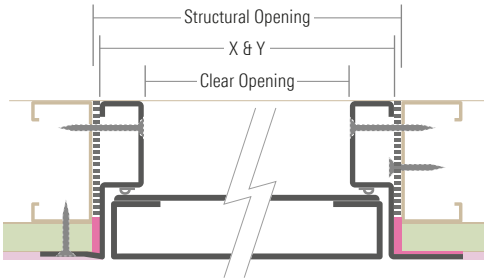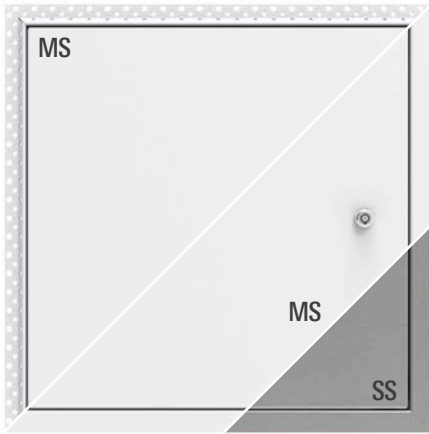

SPECIFICATION

- ❑ 1 hour fire rated (1FR) option
- ❑ Manufactured to order
- ❑ 1.2mm electro-galvanised mild steel (MS)
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Concealed hinges & lock options
- ❑ Frame options to suit finishing requirements
- ❑ Compression seal gasket
- ❑ Fully matt powder coated, suitable for finishing on site
- ❑ Anti - bacterial specialist coating option
- ❑ Stainless steel option (SS) on request

FEATURES & OPTIONS



EXAMPLE ORDER CODE

9000-NFR-PF-SL-SD-600x600-SS


	Walls	Ceilings	NFR	1FR	BF	PF	MS	SS	BL	SL	PC
MS	●	●	●	●	●	●	●	●	●	●	●
SS	●	●	●	●	●	●	●	●	●	●	●

Typical Sizes	Structural Opening	Clear Opening	Depth	Weight MS	Weight SS
200 x 200	205 x 205	140 x 168	85	1.5	1.6
300 x 300	305 x 305	240 x 268	85	3	3.2
300 x 600	305 x 605	240 x 568	85	4.7	5.0
450 x 450	455 x 455	390 x 318	85	6	6.4
550 x 550	555 x 555	490 x 418	85	7.5	8
600 x 600	605 x 605	540 x 568	85	11	12
600 x 900	605 x 905	540 x 868	85	15	16
900 x 900	905 x 905	840 x 868	85	19.5	21
600 x 1200	605 x 1205	540 x 1168	85	22	23.1

Bespoke sizes upon request



Budget lock version shown fitted with concealed fully adjustable hinges

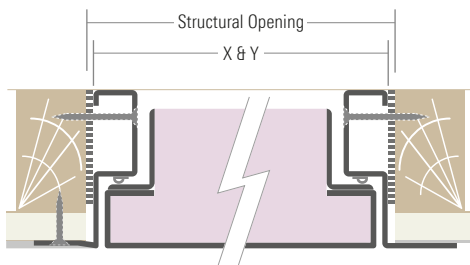

SPECIFICATION

- ❑ Standard sizes available next working day
- ❑ Part L Compliant
- ❑ Satisfies all NHBC Standards 2011 Edition
- ❑ Insulation U-Value 0.35 W/m²K
- ❑ Meets all relevant British Standards
- ❑ Draught seals
- ❑ Concealed hinges with lock options
- ❑ 1.2mm electro-galvanised mild steel
- ❑ CNC manufactured to ISO 9001:2008 & 14001:2004
- ❑ Frame options to suit finishing requirements
- ❑ NFR Phenolic Foam lined, 1FR Mineral Wool lined
- ❑ Fully matt powder coated, suitable for finishing on site

FEATURES & OPTIONS



**SPECIFY FRAME, LOCK & FIRE
PERFORMANCE
OPTIONS WHEN ORDERING**

	Walls	Ceilings	NFR	1FR	BF	PF	MD	PD	BL	SL	PC
NFR		●	●		●	●	●		●	●	●
1FR		●		●	●	●	●		●	●	

Standard Size	Structural Opening	Maximum Clear Opening	Depth	Weight NFR	Weight 1FR
631 x 542	650 x 550	571 x 512	80	8.5	9.5
746 x 542	765 x 550	686 x 512	80	9.8	11.2


Bespoke sizes upon request



SPECIFICATION

- ❑ Non fire rated, lightweight access solution
- ❑ Colour white with light textured surface
- ❑ Injection Moulded High Impact Styrene
- ❑ Passive hinge with press to close fastening
- ❑ Removable door
- ❑ Visible picture frame
- ❑ Simple to install
- ❑ Can be painted on site to suit
- ❑ For ceilings and walls

FEATURES & OPTIONS

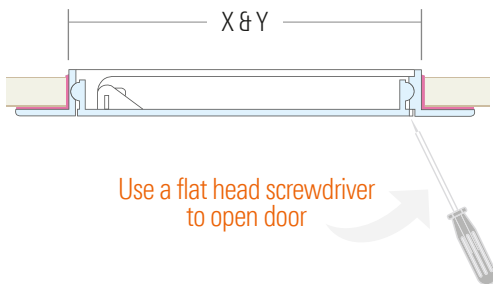

Use a flat head screwdriver
to open door

Adhesive mastic (by installer)

SIMPLE INSTALLATION

1. Prepare structural opening. Structural opening should be between 6-8mm larger than X & Y.
2. Check aperture is flush & flat.
3. Remove any debris & dust.
4. Adhesive mastic fix frame to aperture, then decorate door face and frame to suit.

ORDER CODE	Order Size X & Y	Clear Opening (with door removed)	Depth	Weight Kg
MA100150	100 x 150	88 x 138	21	0.15
MA150225	150 x 225	138 x 213	21	0.20
MA200200	200 x 200	188 x 188	21	0.30
MA300300	300 x 300	288 x 288	21	0.40
MA350350	350 x 350	338 x 338	21	0.48
MA450450	450 x 450	438 x 438	21	1.00
MA550550	550 x 550	538 x 538	21	1.50

GLOBAL EXPORT PARTNERSHIPS

Standard & bespoke access products designed & manufactured to meet the most demanding internationally recognised standards.



We are continually looking to expand our international access products supply & distribution network.

Contact our team for opportunities to become a global partner & join in our success.

For more information call:


 +44 (0)1827 718 222

 profabaccess.com

Profab Access Ltd.
Unit C-D Riversdale House
Riversdale Rd.
Atherstone
Warwickshire
CV9 1FA
UK

 sales@profabaccess.com

 [facebook/profabaccess](https://facebook.com/profabaccess)

 [@accesspanels](https://twitter.com/accesspanels)

 profabaccess.com



FS 668263
ISO 9001 & ISO 14001

 +44 (0)1827 718 222

 INVESTORS
IN PEOPLE

 FIS FINISHES &
INTERIORS
SECTOR

UK Design
Manufacture 