

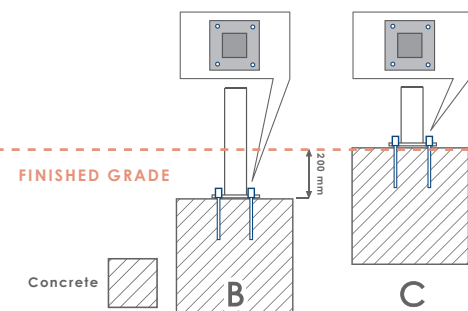

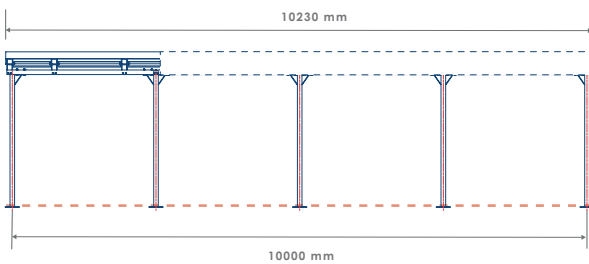


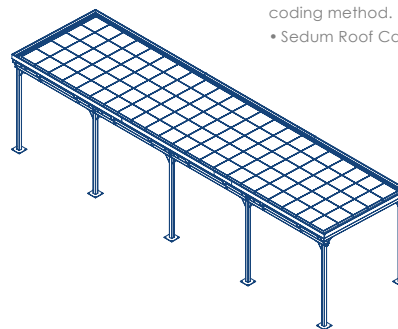

### NOTES

- Site Engineer to determine suitable fixing method.
- Fixing bolts by others - 14 mm dia. holes (use M12 bolts).
- Size of concrete foundation and concrete mix to be determined on site taking ground conditions into account and any risk of wind exposure.
- Number of bays can be matched to cycle parking requirements, specify in coding method.
- Sedum Roof Canopy.

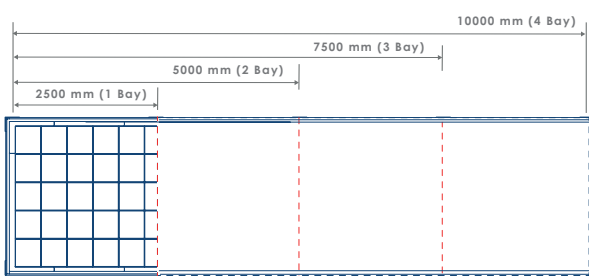

### PRODUCT FINISHES

FIXING OPTION: Below Ground Base Fix (B) - Surface Mount (C)

SLAT MATERIAL: N/A

METAL FINISH: Galvanised (GL) - Galvanised and Powder Coated (GPC)

OTHER OPTIONS: N/A