





SPG329/B/TRC4/GL

NOTES



- Site Engineer to determine suitable fixing method.
- Fixing bolts by others - 14 mm dia. holes (use M12 bolts).
- Size of concrete foundation and concrete mix to be determined on site, taking ground conditions into account and local wind and snow loads.

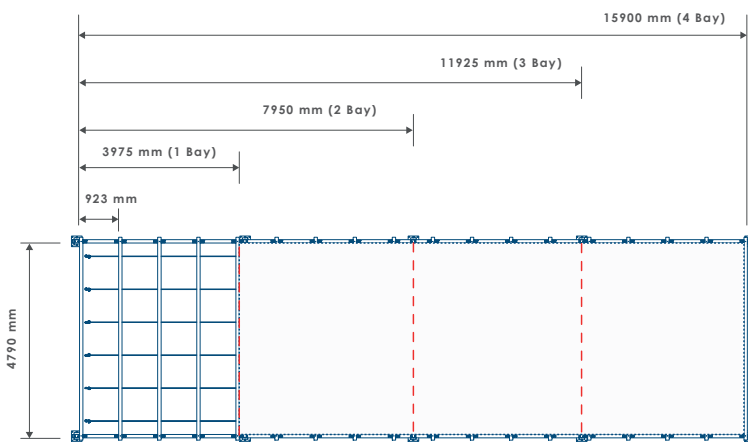

This product is site specific and can be designed to meet the individual requirements of any project. The image shown is an illustration of the type of structure we offer. Contact the sales department for more details.

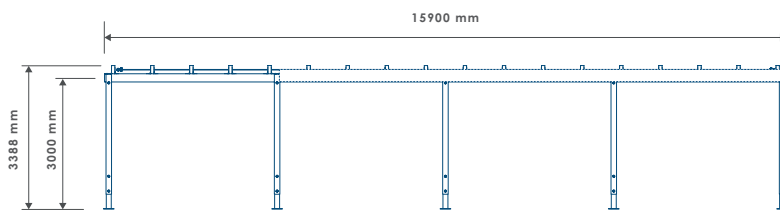

FINISHED GRADE

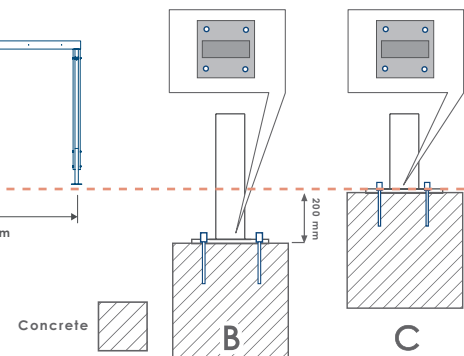

PRODUCT FINISHES

FIXING OPTION: Below Ground Base Fix (B) - Surface Mount (C)

SLAT MATERIAL: Treated Redwood Class 3 (TRC3) - Treated Redwood Class 4 (TRC4) - Hardwood Iroko (HI)

METAL FINISH: Galvanised (GL) - Galvanised and Powder Coated (GPC) - Stainless Steel (SS)

OTHER OPTIONS: N/A