


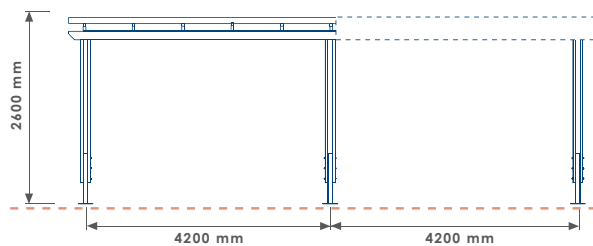


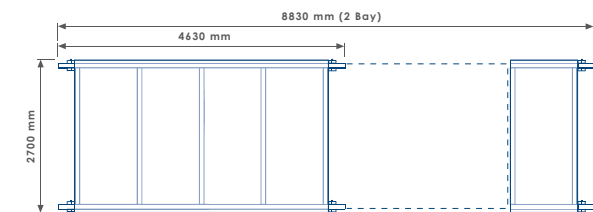


SPG332/B/TRC4/GL/1 BAY

NOTES

- Site Engineer to determine suitable fixing method.
- Fixing bolts by others - 14 mm dia. holes (use M12 bolts).
- Size of concrete foundation and concrete mix to be determined on site, taking ground conditions into account and local wind and snow loads.
- Roof covering in Stucco profile aluminium sheet or 16 mm Multiwall polycarbonate as standard.
- Multiple bays available. Speak to our sales team for more information.

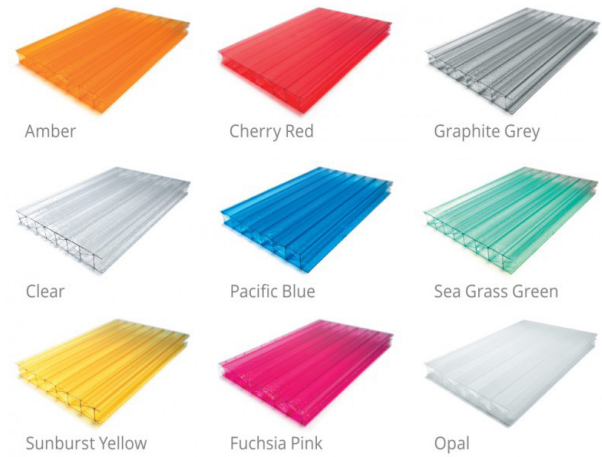

FINISHED GRADE

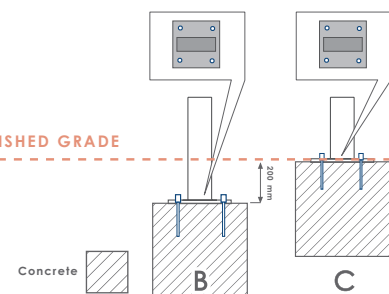

PRODUCT FINISHES

FIXING OPTION: Below Ground Base Fix (B) - Surface Mount (C)

SLAT MATERIAL: Treated Redwood Class 3 (TRC3) - Treated Redwood Class 4 (TRC4) - Hardwood Iroko (HI)

METAL FINISH: Galvanised (GL) - Galvanised and Powder Coated (GPC) - Stainless Steel (SS)

OTHER OPTIONS: N/A