




THE **ULTIMATE** IN GROUND REINFORCEMENT

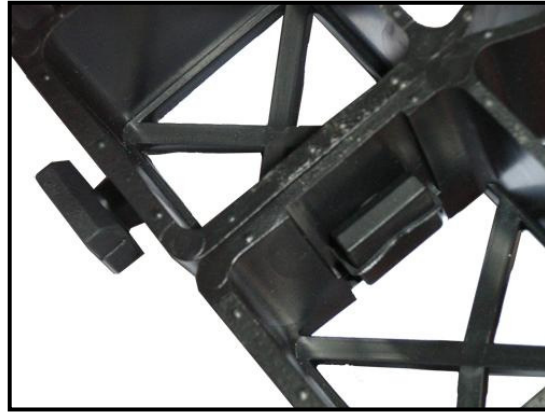

## **GF 30**

**Recommended for:** Use with aggregates, for car parks, road extensions, drive-ways, emergency access routes, storage areas footpaths and walkways.

**Weight handling:** up to 400 tonne/m<sup>2</sup>  
20 tonne axle load

**Size:** 500mm x 500mm x 30mm

**Detail:** 49 cells of 70mm x 70mm per tile

**Wall thickness:** 3mm

**Weight:** 1.1kg per tile

**Packaging:** 4 tiles (2x2) = 1m<sup>2</sup>, 80 layers of 4 tiles = 80m<sup>2</sup>, 320 tiles per pallet.  
Dimensions of pallet = 1050mm x 1050mm x 2550mm

**Material:** LDP - Low Density Polyethylene, 100% recycled, withstands frost and UV radiation, natural stability: resists extreme temperatures -30 to 85 °c

### **Certifications:**

DIN 38412 - Neutral for the environment, lifespan higher than 10 years

DIN 4102 - Approval emergency access routes, fire resistance

DIN 1072 - Approval for 20 tonne axle load, driveways, road extensions, bridges

DIN IN ISO 124 and B125 - Approval for car parks, access roads & storage areas

**For more information Tel: 0115 965 7303**