

TVS Sense are mineral fibre tiles with a Class C Absorption designed for use within a lay-in grid system to form a demountable suspended ceiling.










Sizes available are:


- 600mm x 600mm x 12mm - Square Edge (SE/A Edge)
- 1200 x 600 x 15mm - Square Edge (SE/A Edge)
- 600 x 600 x 15mm - Tegular 24 (t24/24mm Tegular)

Designed as a cost effective tile for offices, retail, storerooms, warehouses and other areas.



Technical Data

	Density	240–280 kg/m ³
	NRC	0.55 as per ASTM C 423
	Sound Attenuation	35dB as per ASTM E1477
	Fire Resistance	Class 0 – Surface Spread of Flame
	Humidity Resistance	90–95% RH as per ASTM C 637
	Recycled Content	63% (51% pre consumer, 12% post consumer)
	Environmental	Does not contain any harmful substances
	Anti Sagging	No Sagging, Warping or Delaminating
	Mold Resistance	Tested with additive as per ASTM D3273

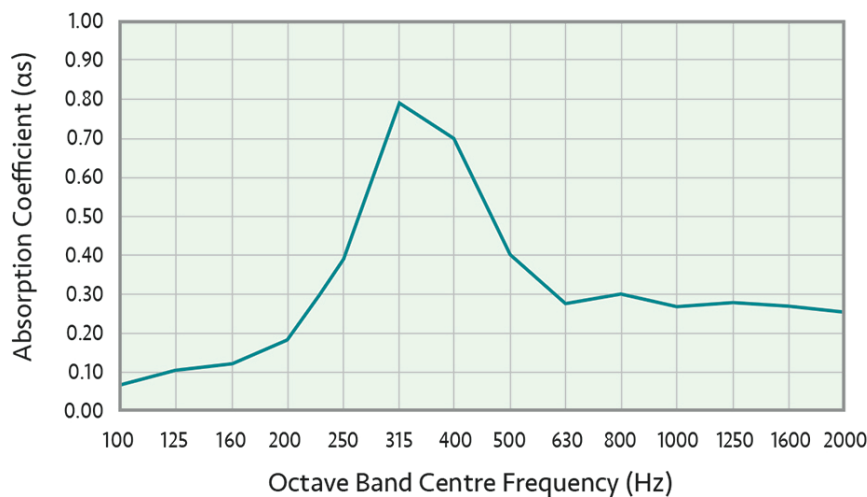

TVS Sense
Product Data Sheet PDS 1.1 TVS Sense
Revision: 1.1 Issued: 29/10/2019