




TVS Cleancare is manufactured according to the UNE-EN 14190 standard, based on a Type A laminated gypsum board covered with a Polyvinyl Chloride (PVC) film that gives it special waterproofing and easy-cleaning qualities. The tiles are available in white, black and smooth.

It incorporates an aluminium-coloured sheet on its back-face that works as a vapour barrier and at the same time protects all the tile, in case of leaks or damage of the housing.

It is a simple solution, of great quality and durability, packed in boxes of 8 units.

Technical Data

Edge:	Square
Dimensions:	White: 600 x 600mm / 600 x 1200mm Black: 600 x 600mm Smooth: 600 x 600mm
Thickness:	8.00mm (+/- 0.5mm)
Average Weight:	5.80kg/m ²
Units/Box:	8 tiles (600 x 600mm) = 2.88m ² weight: 17kg per carton 6 tiles (600 x 1200mm) = 4.32m ² weight: 34kg per carton
Thermal Conductivity:	0.25 W/m K (UNE-EN 12524 Standard)
Fire Resistance (max.):	30 minutes
Coating Film:	Polyvinyl chloride – 80g/m ²
Intended Use:	Removable ceilings in bathrooms, kitchens and areas where easy maintenance and cleaning are required.

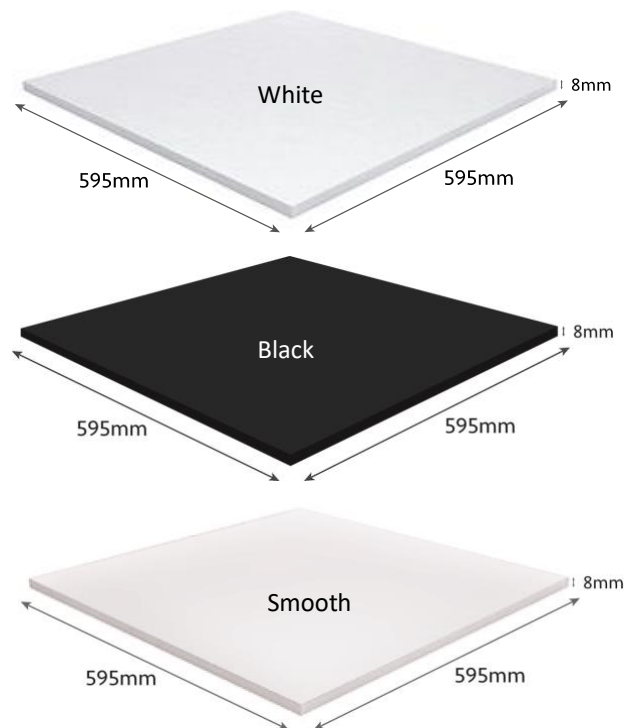

Advantages

- Easy to clean
- High light reflectance
- Vapour barrier
- Moisture resistance
- Recyclable
- Durability and resistance
- High fire resistance

Fire Reaction Test Results*

According to UNE-EN 13501-1 + A1: 2003

Test	Clause	Result
Fire behaviour	11.7.3	A2
Smoke emission level	11.10.1	s1
Flaming droplets	11.9.2	d0

A2 s1 d0

**Tested at Efectis Labs, Certificate No: EEA-1800-0071, October 2018. Fire resistance classification in accordance to UNE-EN 13501-1:2007+A1:2009 Reference standard UNE-EN 14190:2014 "Gypsum board products from reprocessing."*



Product: TVS CLEANCARE
Revision: 1.0
Issued: 04/2022