


Steel Single RAKT Bench (1.2x0.6m)








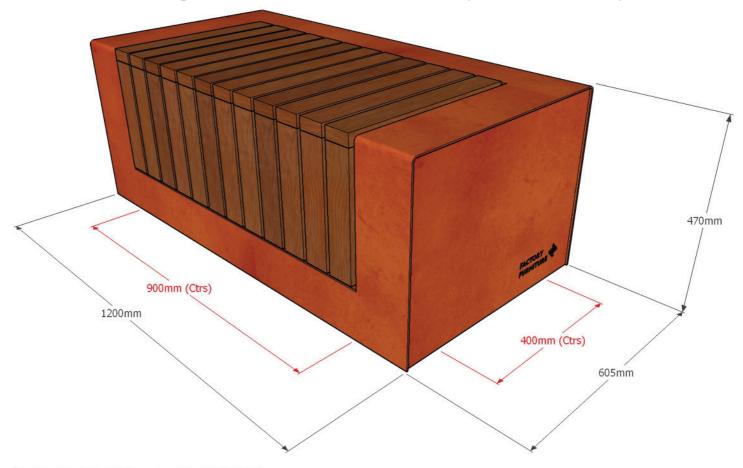

SPECIFICATIONS

Composition

Slats - FSC® certified tropical hardwood



Finish

Natural finish as standard. (Oil or microporous woodstain available on request). Galvanised mild steel option - polyester powder coated finish (colour - grey as standard or to customer specification)

Dimensions

Metric L - 1200mm | W - 605mm | H - 470mm | Imperial L - 3' 11" | W - 2' 0" | H - 1' 61/2"

Approx weight 95kg

Fixing centres & method

900mm (2' $11\frac{1}{2}$ ") x 400mm (1' $3\frac{1}{2}$ ") - fixed with 4 no. sleeve anchors per bench

Foundation

2 no. pads 300 x 300 x 700 mm in C20 concrete (recommendation only)


Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items


Maintenance

Depends on usage and position. All elements will require annual cleaning. Wood should be treated every other year if coated. Corten steel requires no maintenance. Galvanised and powder coated mild steel parts only require maintenance if damaged.

FSC® C005669



Steel Double RAKT Bench (1.2x0.6m)

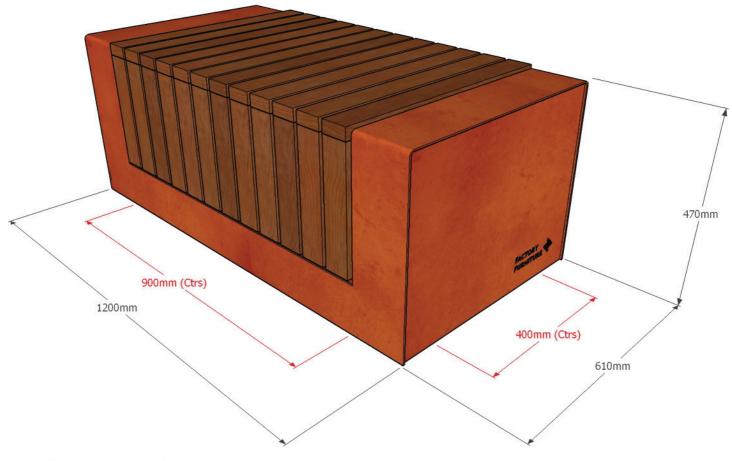







SPECIFICATIONS

Composition

Slats - FSC® certified tropical hardwood

Body - Corten (option for hot dipped galvanised mild steel)

Finish

Natural finish as standard. (Oil or microporous woodstain available on request). Galvanised mild steel option - polyester powder coated finish (colour grey as standard or to customer specification)

Dimensions

Metric L - 1200mm | W - 610mm | H - 470mm | mperial L - 3' 11" | W - 2' 0" | H - 1' 61/2"

Approx weight 104kg

Fixing centres & method

900mm (2' $11\frac{1}{2}$ ") x 400mm (1' $3\frac{1}{2}$ ") - fixed with 4 no. sleeve anchors per bench

Foundation

2 no. pads 300 x 300 x 700 mm in C20 concrete (recommendation only)

Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items


Maintenance

Depends on usage and position. All elements will require annual cleaning. Wood should be treated every other year if coated. Corten steel requires no maintenance. Galvanised and powder coated mild steel parts only require maintenance if damaged.

FSC® C005669



Steel Link RAKT Bench (1.2x0.6m)

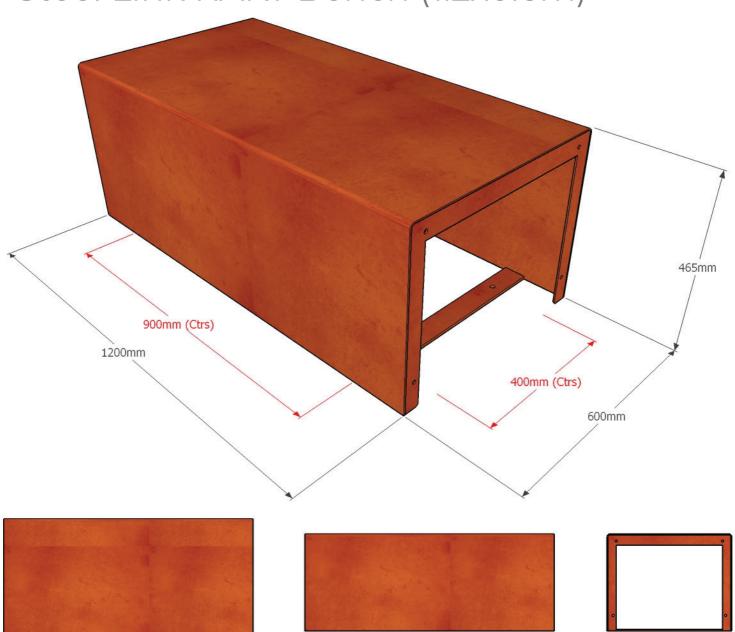

SPECIFICATIONS

Composition

Corten (option for hot dipped galvanised mild steel)

Finish

Galvanised mild steel option - polyester powder coated finish (colour - grey as standard or to customer specification)

Dimensions

Metric L - 1200mm | W - 600mm | H - 465mm | Mperial L - 3' 11" | W - 1' 11½" | H - 1' 6½"

Fixing centres & method

900mm (2' $11\frac{1}{2}$ ") x 400mm (1' $3\frac{1}{2}$ ") - fixed with 4 no. sleeve anchors per bench

Approx weight 69kg

Foundation


2 no. pads 300 x 300 x 700 mm in C20 concrete (recommendation only)

Handling


Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items

Maintenance

Depends on usage and position. All elements will require annual cleaning. Corten steel requires no maintenance. Galvanised and powder coated mild steel parts only require maintenance if damaged.



Steel Corner RAKT Bench (0.6m)

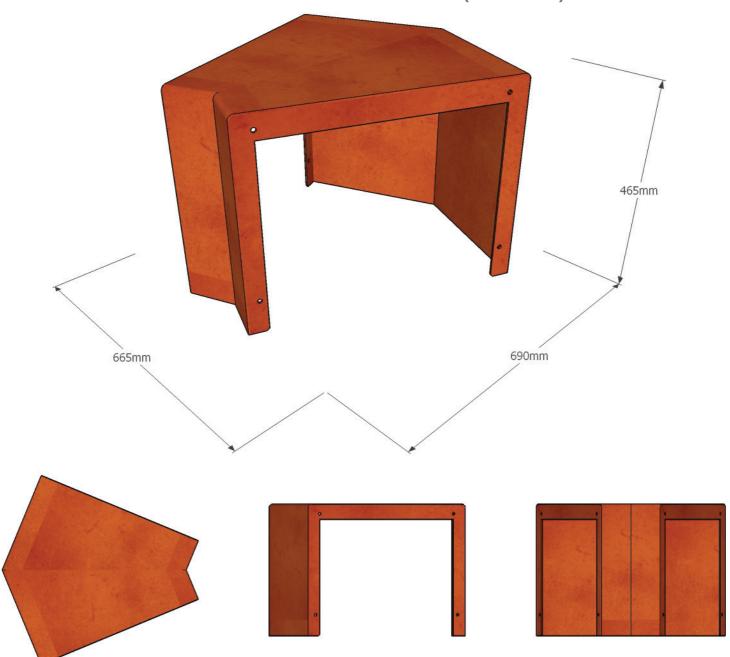

SPECIFICATIONS

Composition

Corten (option for hot dipped galvanised mild steel)

Finish

Galvanised mild steel option - polyester powder coated finish (colour - grey as standard or to customer specification)

Dimensions

Metric L - 665mm | W - 690mm | H - 465mm | Mperial L - 2' 2" | W - 2' 3" | H - 1' 61/2"

Approx weight 30kg

Foundation

1 no. pads 800 x 800 x 300 mm in C20 concrete (recommendation only)

Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items

Maintenance

Depends on usage and position. All elements will require annual cleaning. Corten steel requires no maintenance. Galvanised and powder coated mild steel parts only require maintenance if damaged.