




Concrete Single RAKT Bench (1.2x0.9m)



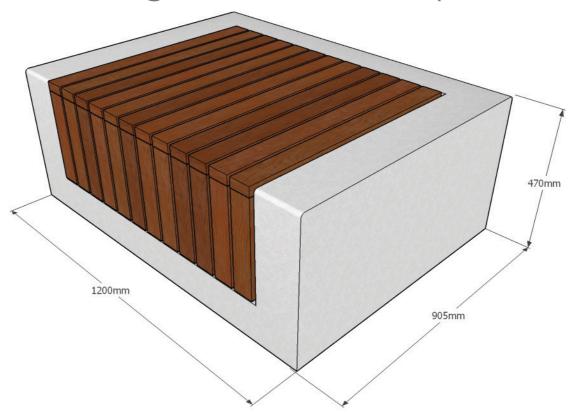





SPECIFICATIONS

Composition

Slats - FSC® certified tropical hardwood

Frame - Galvanised mild steel - powder coated (grey) Base - Smooth white concrete. (Other concrete finishes are available on request). Galvanised mild steel internal reinforcement frame



Natural finish as standard. (Oil or microporous woodstain available on request). Concrete sealed (waterproofed and anti-graffiti)

Dimensions

Metric L - 1200mm | W - 905mm | H - 470mm | mperial L - 3' 11" | W - 2' 11½" | H - 1' 6½"

Approx weight 1222kg

Foundation

1 no. pad 1300 x 1000 x 400 mm in C20 concrete (recommendation only)


Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items. Features integrated lifting sockets - **Llfting eyes not supplied**


Maintenance

Depends on usage and position. All elements will require annual cleaning. Wood should be treated every other year if coated. Concrete requires no maintenance. Galvanised and powder coated mild steel only requires maintenance if damaged.

FSC FSC® C005669



Concrete Double RAKT Bench (1.2x0.9m)

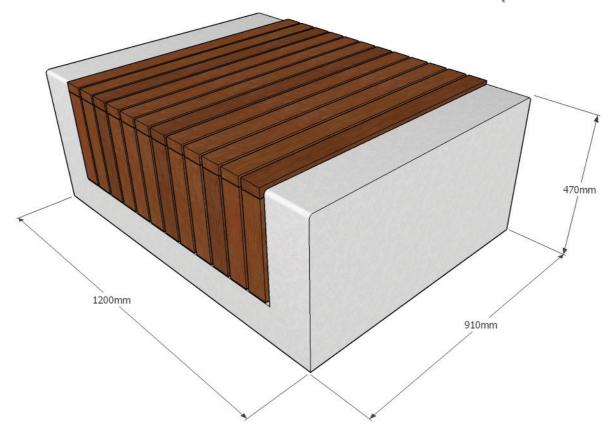







SPECIFICATIONS

Composition

Slats - FSC® certified tropical hardwood

Frame - Galvanised mild steel - Powder coated (grey) Base - Smooth white concrete. (Other concrete finishes are available on request). Galvanised mild steel internal reinforcement frame

Finish

Natural finish as standard. (Oil or microporous woodstain available on request). Concrete sealed (waterproofed and anti-graffiti)

Dimensions

Metric L - 1200mm | W - 910mm | H - 470mm | mperial L - 3' 11" | W - 3' 0" | H - 1' 6½"

Approx weight 1210kg

Foundation

1 no. pad 1300 x 1000 x 400 mm in C20 concrete (recommendation only)

Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items. Features integrated lifting sockets - **Llfting eyes not supplied**


Maintenance


Depends on usage and position. All elements will require annual cleaning. Wood should be treated every other year if coated. Concrete requires no maintenance. Galvanised and powder coated mild steel only requires maintenance if damaged.

FSC FSC® C005669




Concrete Link RAKT Bench (1.2x0.9m)

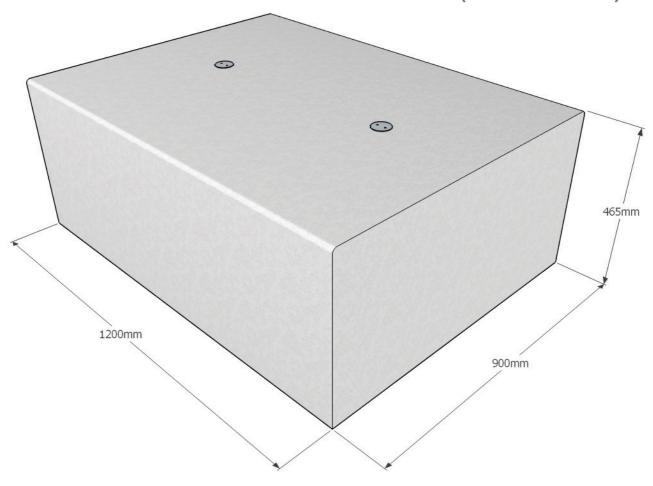







SPECIFICATIONS

Composition

Smooth white concrete. (Other concrete finishes are available on request). Galvanised mild steel internal reinforcement frame

Finish

Concrete sealed (waterproofed and anti-graffiti)

Dimensions

Metric L - 1200mm | W - 900mm | H - 465mm Imperial L - 3' 11" | W - 2' 11½" | H - 1' 6½"

Approx weight 1256kg

Foundation

1 no. pad 1300 x 1000 x 400 mm in C20 concrete (recommendation only)

Handling


Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items. Features integrated lifting sockets - **Llfting eyes not supplied**

Maintenance

Depends on usage and position. All elements will require annual cleaning. Concrete requires no maintenance



Concrete Corner RAKT Bench (0.9m)

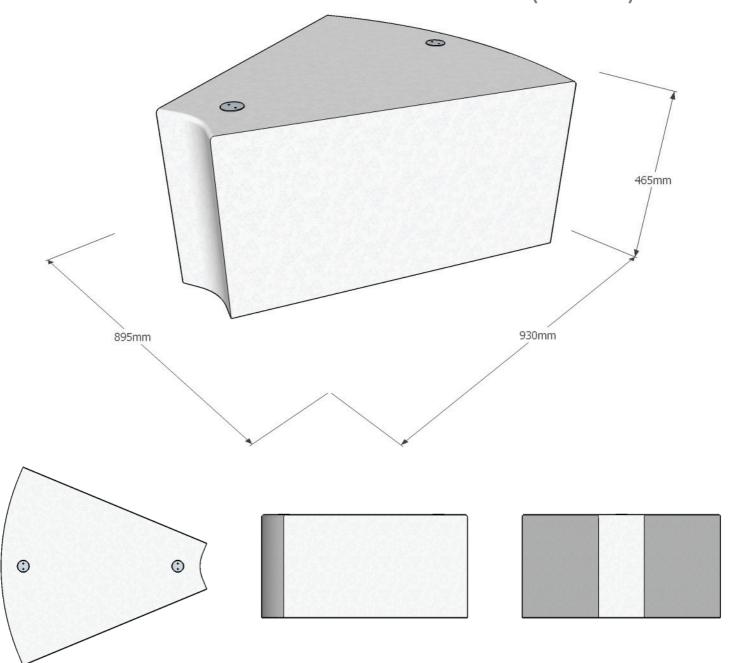

SPECIFICATIONS

Composition

Smooth white concrete. (Other concrete finishes are available on request). Galvanised mild steel internal reinforcement frame

Finish

Concrete sealed (waterproofed and anti-graffiti)

Dimensions

Metric L - 895mm | W - 930mm | H - 465mm | Mperial L - 2' 11" | W - 3' ½" | H - 1' 6½"

Approx weight 598kg

Foundation

1 no. pads $1050 \times 1050 \times 400$ mm in C20 concrete (recommendation only)

Handling

Please observe health & safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of items. Features integrated lifting sockets - **Llfting eyes not supplied**

Maintenance

Depends on usage and position. All elements will require annual cleaning. Concrete requires no maintenance