


# FACTORY FURNITURE



## Murton Cycle Stand

OPERATION & MAINTENANCE MANUAL



# Introduction

## Design

Design, shop drawings and development by Factory Furniture Ltd.

## Manufacture

Factory Furniture manufactured components. Products are assembled in Factory workshops, checked and dispatched ready for installation. Replacement products or components thereof should be ordered direct from Factory Furniture Ltd.

## Copyright

The design copyright for the product and drawing copyright remains the sole property of Factory Furniture Ltd.

# General Specifications

## MURTON Cycle Stand

*Metric* L 425mm | W 60mm | H 800mm \*

*Imperial* length 1' 4½" | width 2½" | height 2' 7½" \*

\* Not incl. +250mm (10") below ground level for sub-surface root fix

**Approx Weight** 17kg

**Fixing method** 190mm (7½")

# Detailed Material & Finish Specifications

## Frame

- Manufactured from mild steel with a hot dip galvanised finish. (Option for polyester powder coated finish available on request (*any RAL colour*)).
- Root fixed 250mm (10") below ground level

# General Maintenance

(Recommended Schedule & Guidelines)

## Daily/Weekly/Monthly (or as adopted)

Visual checks of post, fingers and lettering - check all items for superficial or physical damage

## Three Monthly

Clean all items as detailed below check all fixings are seated correctly

## Six Monthly

Secure all fixings; full clean as detailed below; check that product is firmly secured to the ground

# Specific Maintenance Details

## Galvanised & Polyester Powder Coated Surfaces

For general cleaning using a damp cloth and warm soapy water only. Scourers and abrasive cleaners are NOT suitable for this type of finish and may damage it. Before using any cleaning agents to remove graffiti etc. try on a small, inconspicuous area first to avoid causing more unsightly damage

# Repairs

## Galvanised Surfaces


For light damage to hot dipped galvanised finishes repair using a high performance cold galvanising zinc spray (70% zinc or above). Spray application should be carried out in accordance with approved methods detailed by the product manufacturer. Please note that it is advisable to use professional painters to achieve best results when touching up larger areas.


## Polyester Powder Coated Surfaces

For light damage (scratches, chips etc.) repair using touch-up paint to match original colour (available from Factory Furniture Ltd). Paint application should be carried out in accordance with approved methods detailed by the paint manufacturer. Please note that it is advisable to use professional painters to achieve best results when touching up larger areas. Products for respraying larger areas are available from Factory Furniture Ltd.



## Heavy Damage

In the event of serious damage to any component, replacements should be ordered from Factory Furniture Ltd. In this event (or if the product needs to be disassembled for any reason), please contact Factory Furniture for detailed technical advice.



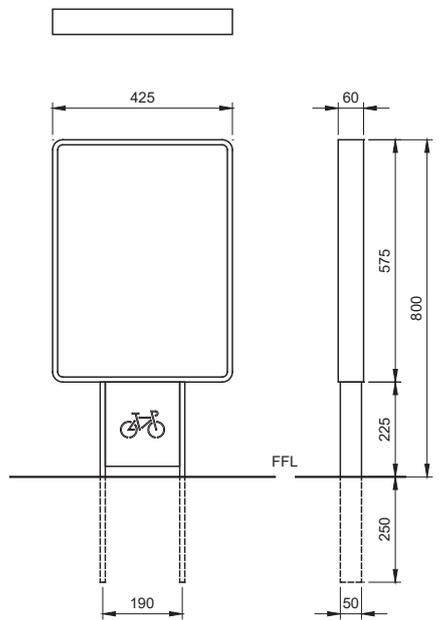

Cycle Stand (Sub-surface Fix Only)

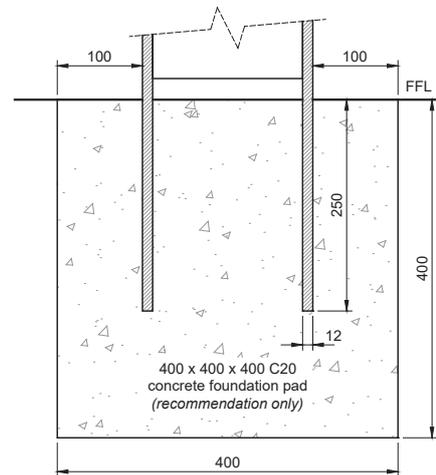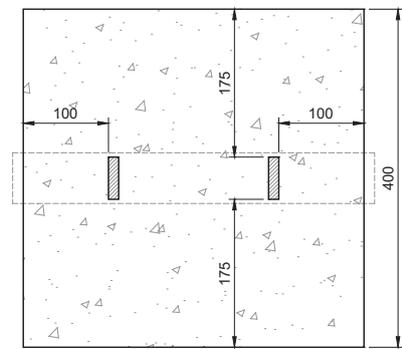

## Installation Instructions

**All installation works to be carried out by competent personnel - install as complete unit.**

### Cycle Stand (sub-surface fix only)

1. Install suitable foundation pad (see right) with top face at ground level
2. As soon as possible after pouring concrete for pad, position cycle stand in correct orientation centrally in foundation pad. Maintain cycle stand at correct height (250mm below ground) and vertical whilst concrete sets (at least 24 hours).

5 Pioneer Road, Faringdon,  
Oxfordshire SN7 7BU  
+44 (0)1367 242731  
hello@factoryfurniture.co.uk

**factoryfurniture.co.uk**

