

Overview

Ball Valves



Meeting every challenge

Ball valves from GF Piping Systems

The GF Piping Systems range of ball valves provides solutions for every application. From simple shut-off valves to fully automated valves, GF Piping Systems has it all. Even for very demanding processes, you will find the perfect valve for your requirements. User-friendly, precise, reliable, flexible and safe – these features come first for our products.

Type 546 // The original

The 546 ball valve takes on every challenge. Whether in PVC-U, PVC-C, ABS, PP-H or PVDF – it is the ideal valve for use in any application from simple water applications to highly exacting chemical processes. Its modular design and material diversity guarantees easy operation, flexibility, universal automation options and maximum process reliability.




Type 546 linear // Perfection in control


The linear ball valve type 546 enables, thanks to its linear flow characteristics, uncomplicated control, even in demanding chemical processes. The time-tested design of the 546 ball valve guarantees optimal safety. Add the material diversity to the equation and the range of applications is unlimited.



Type 543 // Mix and distribute the easy way

The 543 ball valve is the perfect valve for all mixing and distribution processes. Horizontal versions with L or T port as well as vertical versions with L port or 3-way ball allow realizing any number of application options. Redirecting, mixing, distributing or even shutting off a medium are just some of the possibilities.

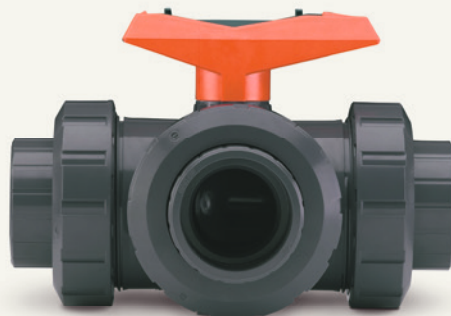

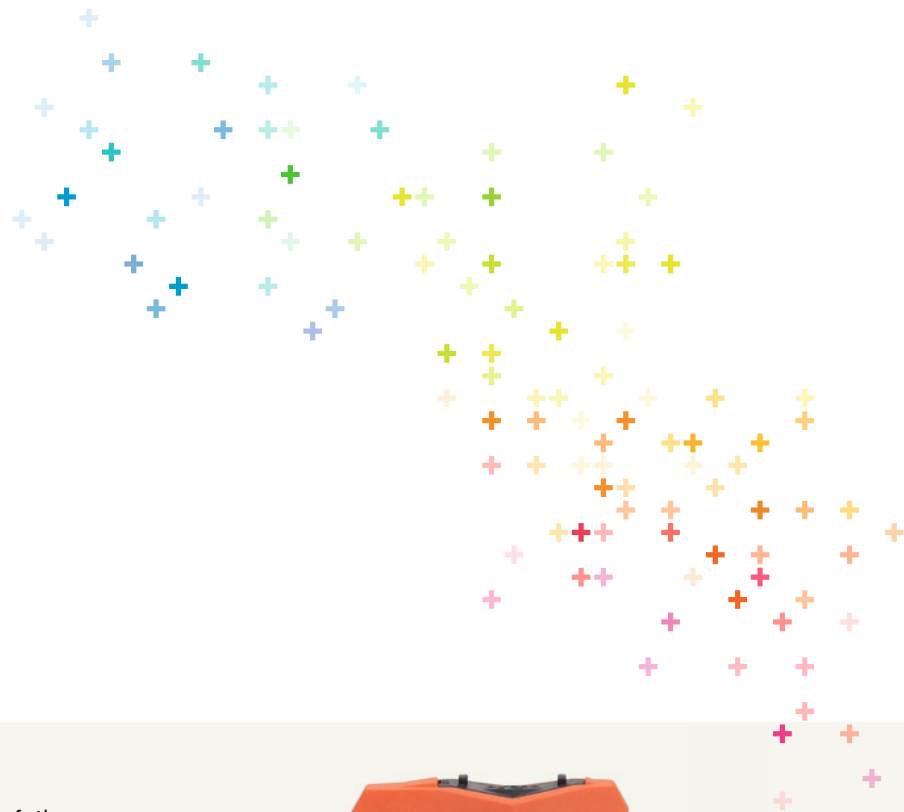

Type 523 // Incredibly precise

Exact dosing of small quantities is the strength of the 523 metering ball valve. With its new circular scale and specially shaped ball, media can be dosed with high precision.



Type 375 // The affordable valve for simple applications

The PVC-U ball valve type 375 is a cost-effective manual valve, specially developed for use in water applications or with non-critical chemicals. Its design ensures easy maintenance and therefore a long service life. Its compactness also means easy installation and removal in piping systems.



Type 355 Coloro // Compact and versatile

The Coloro ball valve is a compact valve for water applications. It features a monoblock construction, making it a low-maintenance valve for non-critical applications. By using standard union nuts and union ends, maximum flexibility and availability of spare parts has been achieved.



The industrial ball valve

For applications in industry

Easy, efficient and reliable

The technical features of this product series have been proven in innumerable fields of application. The ball valve types 546, 546 linear, 543 and 523 enable fast and easy integration in the piping system thanks to a large choice of connection options. Integrated threaded mounting ports ensure secure valve fastening with ease. Precision engineering and high quality standards guarantee maximum operational safety and a long service life.

Absolute reliability

Every ball valve is leak-tested in production. These tests are a major factor in guaranteeing absolute process reliability. We continually invest in state-of-the-art production equipment and test facilities in order to ensure that only the highest quality valves are delivered to our customers.



Trust is good – Control is better

Electrical feedback allows for continuous system monitoring with accuracy and simplicity.



Assembly – fast and safe

It's not just the compatibility with all piping components that makes GF Piping Systems valves easy to install in your system. Quick and efficient fastening with two integrated threaded bushings also saves time.



Ball Valve Labeling System

Identification of ball valves according to the function, valve number and fluid conveyed. Water-, corrosion and UV-resistant.



Swiss precision and attention to detail – a guarantee of maximum safety

This industrial ball valve offers you unconditional safety. Special design features ensure high reliability and durability. For instance, there are no metal components that are vulnerable to medium exposure, which could corrode during use. A designed stem break point prevents catastrophic failure in the case of wear or over torquing. Two stem seals provide multiple fail safe points, providing maximum protection against valve leakage.




The original

A ball valve for every occasion

GF Piping Systems offers you a ball valve that has stood the test of time in countless applications, and is the result of extensive industry experience and technological know-how in piping system construction. The 546 ball valve offers quality, flexibility, reliability and most notably modularity. This ball valve meets the ecological and economic industry standards while offering unmatched operational safety and engineered design features.

The 546 ball valve is particularly suitable for use as an open/close valve. However, this ball valve can be used in a variety of applications where control is critical. Excellent flow values are achieved with this design.

Flow diagram

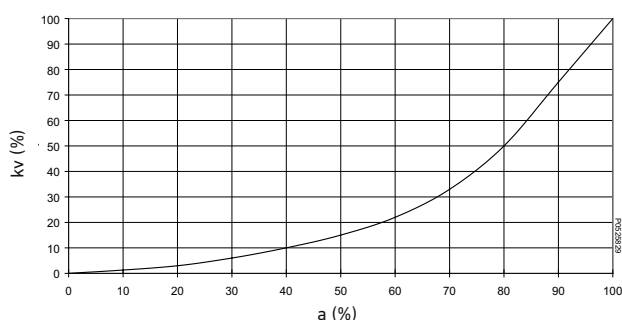

Application areas

- Chemical process industry
- Life science industry
- Microelectronics
- Measurement and control technology
- Water treatment
- Food and beverage industry
- Shipbuilding

Specifications

- Dimensions DN10 to DN100 (3/8" - 4")
- Handle extension for hard-to-reach installations
- Injection-molded ball requires no machine finishing and guarantees a smooth surface and long service life
- Spacers maintain a constant level in the piping system and simplify installation
- Individual online configuration is available
- Oil-free and silicone-free versions available
- Impressive flow capacity
- Universal interface facilitate use with most
- AS interface
- Automation




The linear ball valve

Control made easy – even in complex applications

With the linear ball valve type 546, GF Piping Systems offers a valve that significantly facilitates control of your applications. This ball valve features all the familiar details of the 546 series, but has a specially shaped ball. The carefully engineered ball enables a linear flow, even when minimal flow rates are desired. The flow characteristic is linear for the entire opening angle and because it can be combined with an electric actuator, it is the perfect valve for use in demanding control loops.

The 546 linear ball valve is particularly suitable for use as a control valve. Processes are configured and controlled more easily with its linearly increasing flow rate.

Flow diagram

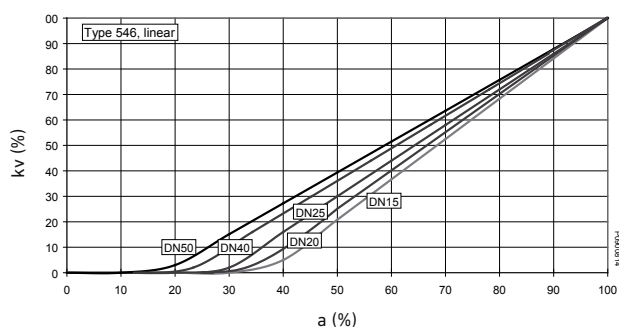

Application areas

- Chemical process industry
- Life science industry
- Microelectronics
- Measurement and control technology
- Water treatment
- Food and beverage industry
- Shipbuilding

Specifications


- Ideal control valve
- Dimension range DN15 to DN50 (½" - 2")
- Tool integrated in the lever
- Minimal maintenance required
- Spacer maintains a constant level in the piping system and makes for easier installation
- Special ball design enables high flow values with linearly increasing flow performance
- Opening angle in percent imprinted on multi-functional module
- Minimal dead spaces
- Automation with electric or pneumatic actuator possible

Type 543

The 3-way ball valve

The ideal ball valve for any application

The 3-way ball valve from GF Piping Systems is the ideal valve for all mixing and distribution processes in your application. The 543 ball valve is available in a horizontal and a vertical version. The horizontal option features a ball with an L-shaped bore or a ball with a T-shaped bore. The vertical valve has a ball with an L-shaped bore or a 3-way ball.

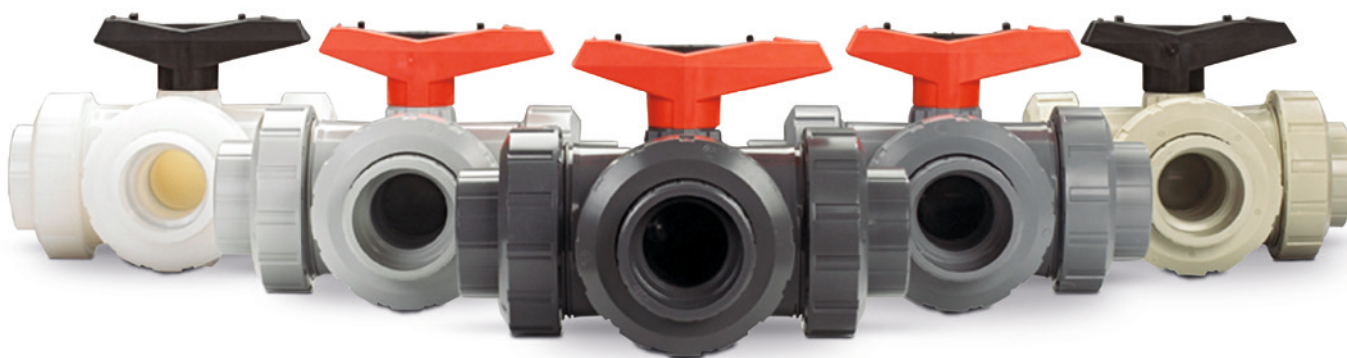

L-port



Distribution function in the starting position



Mixing function with reduced flow



Distribution function





Outlet closed, passage open with reduced flow



Shut-off function

Flow diagrams

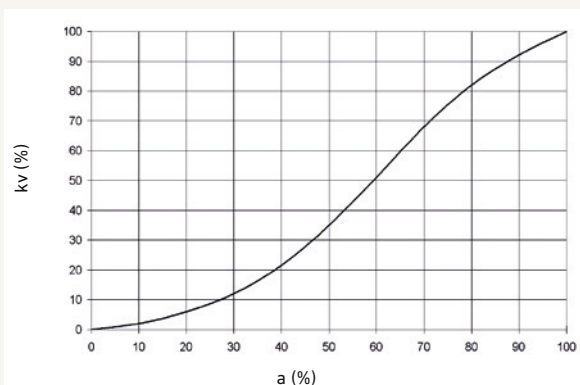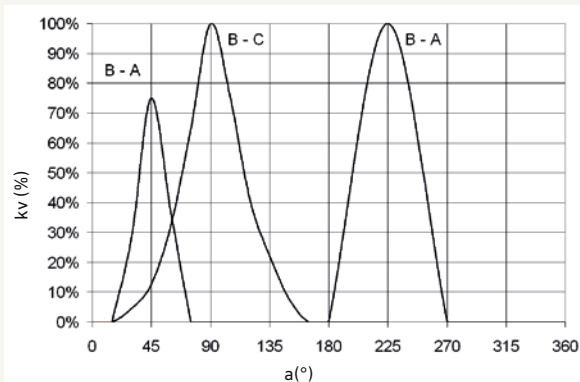


Application areas

- Chemical process industry
- Desalination plants
- Life science industry
- Microelectronics
- Measurement and control technology
- Water treatment
- Distribution in shipbuilding

Specifications

- Deal distribution and mixing valve
- Ball with L-port or T-port
- Dimension range DN10 to DN50 ($\frac{3}{8}$ " – 2")
- Lever made of fiberglass-reinforced polypropylene (PPGF)
- Tool integrated in lever
- Very good flow characteristics
- Durable
- Automation possible with electric or pneumatic actuator

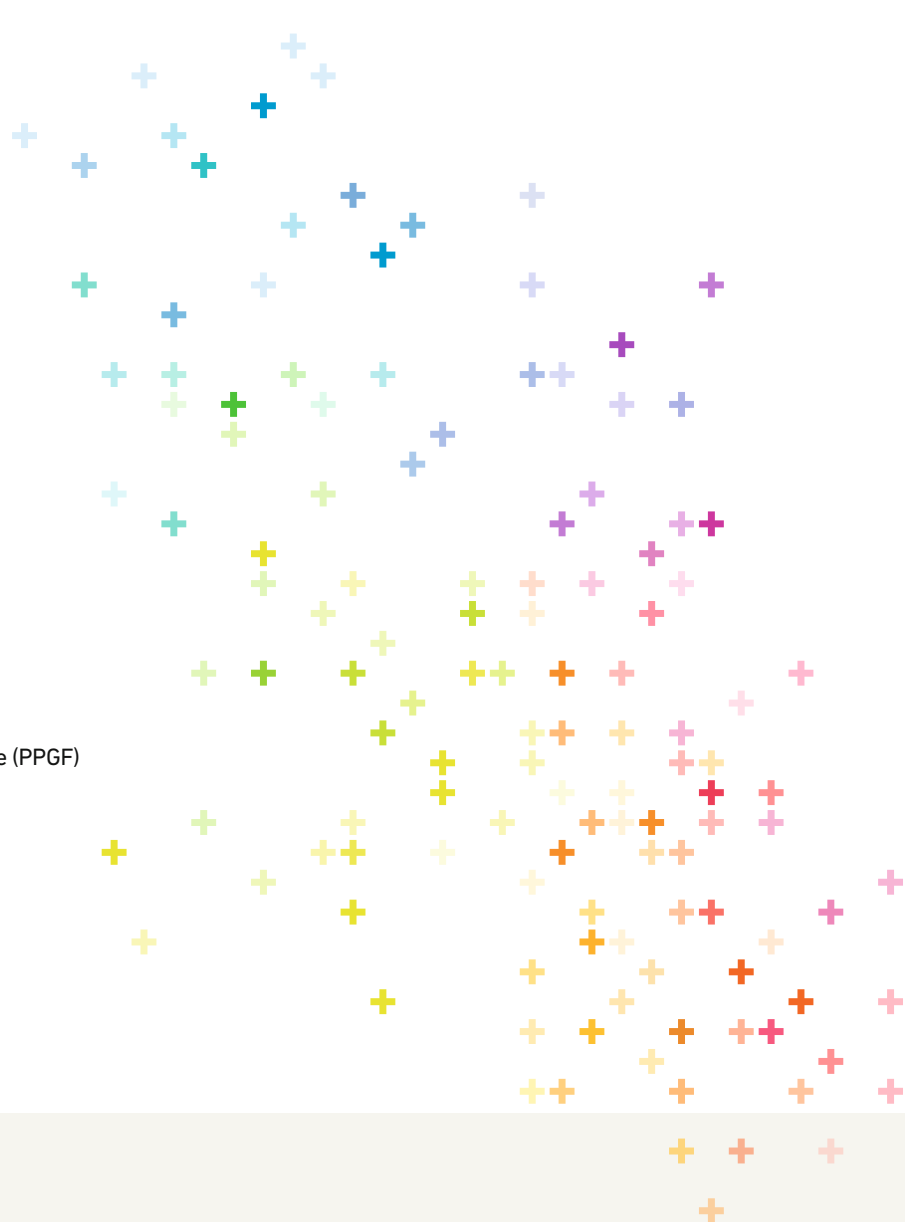

T-port



Distribution function in the starting position



Distribution function



Outlet closed, passage open





Distribution function



Shut-off function

Flow diagrams

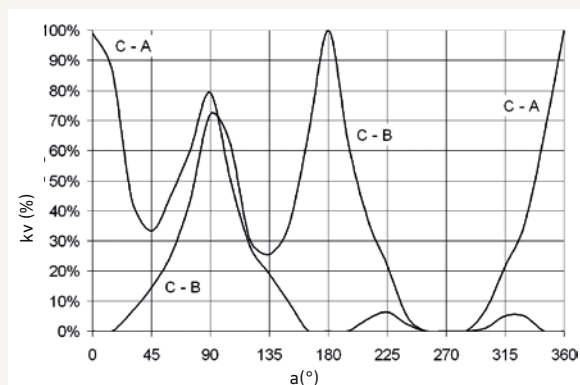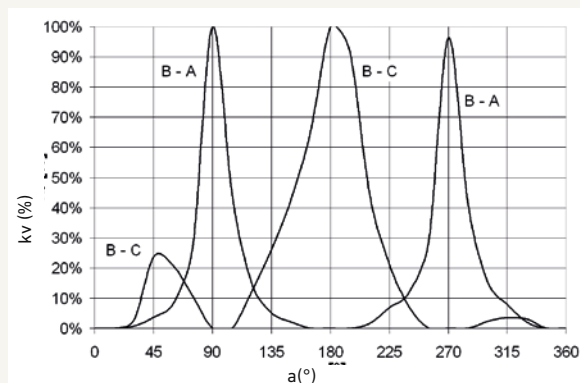


The metering ball valve

Unbeatable for metering small quantities

Based on a proven design, the ball valve type 523 from GF Piping Systems is the perfect valve for all metering applications. Due to the specially shaped ball, a nearly linear flow is achieved. Sudden increases in the flow rate are not an issue with this design, rendering this ball valve unbeatable in terms of precise metering of small volumes.

Flow diagram

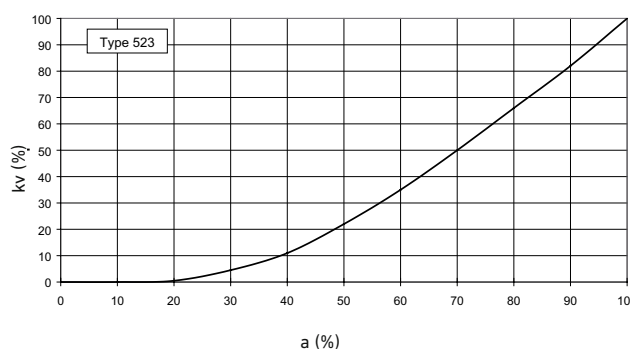

Application areas

- Chemical process
- Life science
- Microelectronics
- Measurement and control technology
- Water treatment
- Shipbuilding
- Food and beverage

Specifications

- Ideal metering valve
- Precise setting of flow rate
- Flow characteristics permit sampling small amounts with great accuracy
- Dimension range DN10 and DN15 ($\frac{3}{8}$ " and $\frac{1}{2}$ ")
- Circular scale facilitates exact dosing
- Low maintenance
- Length same as all 5xx ball valves
- Spacers ensure the right level in the piping system and make for easy installation
- Tool integrated in lever
- Virtually linear flow thanks to the specially shaped ball
- Sudden increases in flow, as with conventional ball shapes, are almost precluded
- Can be used with nearly any media




Type 375

The practical one

Guaranteed easy handling in water applications

The 375 ball valve is the perfect addition to GF Piping Systems' line of ball valves. The range of uses include basic applications in water treatment as well as in simple water applications. The type 375 is available in PVC-U and PVC-C. The 375 ball valve has been designed for easy maintenance and a long service life. And because it is so compact, it is easy to install and remove from the piping system.

Flow diagram

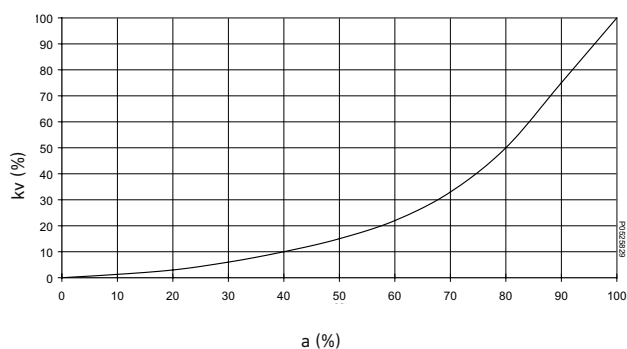

Application areas

- Irrigation
- Swimming pools
- Water treatment
- Non-critical chemicals

Specifications

- DN10 - DN100 (½" - 4") with solvent cement and threaded sockets
- Low maintenance
- Tool integrated in lever
- Ball seal in PTFE
- Durable




Type 355

Coloro

Clarity in the piping system

The ball valve type 355 (Coloro) is a compact valve for water applications. Its distinguishing feature is the monoblock construction, which makes it a low-maintenance valve ideal for non-critical application areas. For the sealing material, HD-PE is used in combination with an EPDM O-ring. By implementing standard union nuts and union ends, maximum flexibility and availability of spare parts are guaranteed.

Flow diagram

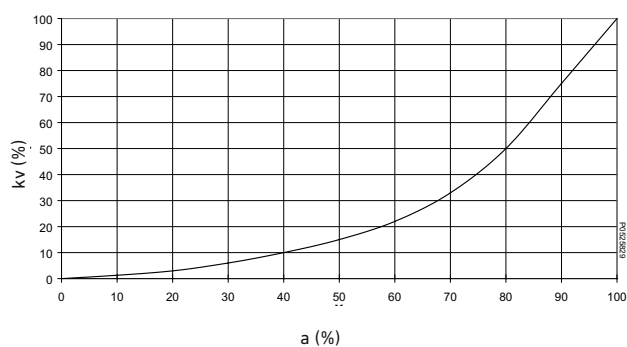

Application areas

- Irrigation
- Greenhouses
- Feeding installations
- Fish Farming
- Swimming pools

Specifications

- Dimensions DN15 – DN50 (½" – 2")
- Manual valve for non-critical applications
- All standards
- Low maintenance
- Radial mounting and dismounting



Automation options

Dependable, precise and efficient

Automatic plant operation and monitoring

The ball valve series 546, 543 and 546 linear allow GF Piping Systems to provide innovative products that offer customers quality, flexibility, reliability and modularity. Whether it be manual or automated valve, we can supply a comprehensive line of accessories. With an position switch integrated into the multifunctional module, electrical feedback on valve positions "open/closed" is available. Along with multiple other monitoring and control options available to provide further automation advantages.

The GF electrically automated ball valves utilize three different actuators. The EA15 is designed for open/close operation up to dimension d63 DN50 (2"), while the electric actuator EA25 with the corresponding accessories is perfect for all automation and expansion requirements. The EA45 series is designed for dimensions d75 DN65 (2½"), EA120 for dimension d90 DN80 to d110 DN100 (4").

The pneumatically valves are equipped with our pneumatic actuators PA11, PA21, PA30. All pneumatic valves are available in FC, FO or DA functions and have an accessory interface that makes it easy to adapt the valve to the automation requirements.

Application areas

- Chemical process industry
- Microelectronics
- Water treatment systems
- Factory automation
- Measurement & control technology

Specifications

- Flexible assembly thanks to modular construction
- Actuator series for every situation
- Long service life thanks to robust design
- Extensive line of accessories, suitable for every automation task
- Optional emergency manual override
- Universal use thanks to wide range power supply and standard interfaces
- Globally certified: CE, UL CSA



The system at a glance

The right product for every application



Manual operation

General

Title	Coloro	Ball valve	Metering ball valve	Industrial ball valve	3-way ball valve
Type	355	375	523	546	543
Basic type					
Actuator type					
Dimension DN	10-50 (3/8" – 2")	10-100 (3/8" – 4")	10-100 (3/8" – 4")	10-50 (3/8" – 2")	10-50
Nominal pressure PN	Socket: 16	DN10-50: 16	10	ABS/PP-H: 10	10
	Thread: 10	DN65-100 (2 1/2"–4")10		PVC/PVDF: 16	10

Materials

PVC-U	✓	✓	✓	✓	✓
PVC-C		✓	✓	✓	✓
ABS			✓	✓	✓
PP-H			✓	✓	✓
PP-N					
PE	✓	✓	✓	✓	✓
PVDF			✓	✓	

Types

Socket	✓	✓	✓	✓	✓
Spigot	✓	✓		✓	✓
Flange				✓	✓
Threaded	✓	✓		✓	✓

Seal

EPDM	✓	✓	✓	✓	✓
PTFE					
PTFE/FKM					
FKM		✓	✓	✓	✓
FFKM			✓	✓	✓
NBR			✓	✓	✓
Other					

Accessories

- Lever extension
- Extra limit switch
- Mounting panel
- Multifunctional lever
- Linear flow line
- 90° and 180° stop
- Mounting panel
- Multifunctional lever

Key information at a glance

You have the choice –
the right ball valve for your application

+ Pneumatic ball valves

Ball valve type	2-way	Type 230 to 235			
	3-way	Type 280 to 285			
Dimension	DN	DN10 to DN25 (⅜" – 1")	DN32 to DN50 (1¼" – 2")	DN65 (2½")	DN80 to DN100 (3" – 4")
Actuator type		PA11	PA21	PA30	PA40
Peak torque	Mdn	10Nm	20Nm		
Mode of operation		FC, FO, DA	FC, FO, DA	FC, FO, DA	FC, FO, DA
Actuator principle		Rack & pinion		Scotch yoke	
Actuator interface	ISO5211	F04	F05	F03/F05	F05/F07
Control port		G 1/8	G 1/8	Namur R 1/8	Namur R 1/8
Housing material		PP GF30		Anodized aluminum	
Response time	24 V	1-2s, with throttle valve up to 5s		0.5-4s	
Accessory interface		VDI / VDE 3845			
Accessory		Manual override -10° to 50°C			
		Limit switch box for electric feedback			
		3-/2- way pilot valve PV94/PV95 for electric feedback			
		5-/2- way pilot valve MNL532			
		Namur mounting plate			
		Valve Valve terminal PV2000			
		Digital positioner DSR500			
		AS-interface			



The many versions of plastic ball valves from GF Piping Systems combine the unique properties of plastic in design, application and performance. Such features as the significantly lower net weight compared to other materials, corrosion resistance, and the excellent chemical resistance ensure the highest degree of efficiency and reliability. The ball valves ensure consistently high economic efficiency over the entire lifetime of the system.

+ Electric ball valves

Ball valve type	2-way to DN50 (2")	Type 127	Type 179 - 184	
	3-way to DN50 (2")	x	Type 167 - 170	x
	2-way to DN65 –DN100 (2½" – 4")	x	Type 179 - 184	Type 179 - 184
Actuator type		EA 11 (soon EA15)	EA25/45	EA 120
Rated torque	Mdn	10Nm	10/20Nm	60Nm
Peak torque	Mdn	20Nm	25/45Nm	120Nm
Response time		5s @ 90°	~5s @ 90°	15s @ 90°
Actuating angle		Max 180°	Max 180°	Max 180°
Dimension actuator	L/B/H	129/122/138	150/122/167	150/122/190
Actuating cycle	at 20°C and Mdn	150.000	250.000 / 100.000	100.000
Flange type		F05	F05	F07
Nominal voltage	AC AC/DC		100 - 230 V, 50/60 Hz ± 10% 24 V, 56/60 Hz ± 10%	
Input impedance	230 V 24 V	100 kΩ 4.7 kΩ		
Rated output	230 V 24 V	40 VA 22 VA	35/55 VA 40/60 VA	50 VA 55 VA
Duty cycle	at 25°C/15 min	40%	100%	50%
Protection class			IP 65 (IP67) ²⁾ per EN 60529 UL/USA: interior use	
Ambient temperature	-10° to 50°C	-10° to 50°C	-10° to 50°C	-10° to 50°C
Heating element		✓	✓	✓
Position feedback open / close		✓	✓	✓
Position feedback middle			✓	✓
Accessory	Fail-safe unit, battery	✓	✓	✓
	Monitoring board		✓	✓
	Positioner		✓	✓
	Profibus		✓	✓

²⁾ when used with cable glands and vertical installation

Your processes – our safety and efficiency

Application-oriented solutions for the highest demands

The diversity of exigent applications and media demands a consistently high level of safety, efficiency, quality and profitability for plants, systems and individual components. Equally diverse as our customers, their process environments and their requirements are our diversified and individually tailored products – and successfully so for over 50 years. In alignment with the realities of customers and markets, GF Piping Systems offers a variety of systems – in terms of valves as well. These integrate optimally in the process structure of the complete system and comply uncompromisingly with the required performance and quality standards.



Chemical process industry

The aggressive environment in chemical processing plants calls for piping systems in production and transport processes that provide the highest possible degree of safety and quality. When dosing, mixing and batching chemicals, accurate flow and linear control characteristics, even under difficult conditions, are essential for efficient and safe processes. Contamination must be avoided at all costs in all process stages; this is particularly true in surface finish. The industrial ball valves in the 546, 543 and 523 series, specially developed by GF Piping Systems for the stringent requirements and regulations of this demanding industry, guarantee excellent flow performance, reliable process control and flexible installation options.

Microelectronics

The majority of all processes in microelectronics take place under rigorously controlled clean room conditions. Particular exigency is placed on the consistent purity of the process water and the transport of ultrapure water. Moreover, aggressive chemicals are necessary for the manufacture of semiconductor products and these must be conveyed safely for the various processes. Therefore, the highest purity criteria and maximum chemical resistance are required of the products used to convey the media. The wide range of products in our 546, 543 and 523 industrial ball valve lines offers the optimal, high-quality solution for nearly every chemical and requirement. For special purity requirements, the ball valves can be obtained silicone-free cleaned as an option.

Universal in character

A modern system that serves all applications

The convincing features offered in these systems and materials enable a multitude of application options in the chemical process industry, microelectronics and water treatment. Not only the outstanding abrasion and corrosion resistance to external influences and aggressive media, as indicated in the direct comparison with metal, but also the smooth surface and the low weight of plastics provide added value in terms of system lifetime, maintenance and handling. "Total Plastic Solutions" from GF Piping Systems guarantee safety and quality, in addition to efficiency and profitability.

Water treatment


The importance of an economical and sustainable means of treating water is growing rapidly against the backdrop of resource scarcity. The ball valves from GF Piping Systems offer technical features and functionalities in keeping with global requirements. In the business of water treatment, these are especially pertinent when transporting water or when handling chemicals.

The type 355 is frequently implemented in simple water applications due to its compact dimensions and design. The type 375 is also suitable for simple applications with chemicals and is easily maintained thanks to its design. The 546, 543, 523 series will take on any challenge. They cover the largest spectrum of dimensions and functions, are available in all conventional piping materials and standards and offer the widest selection of connecting elements. They are designed for maximum security and longevity and can be actuated with the help of interfaces manually, electrically or pneumatically. The flexibility offered by the industrial ball valves in the series 546, 543, 523 make them the first choice in safely transporting media in water treatment applications.

Water distribution

Besides industrial applications, ball valves are found in many other areas, whether in swimming pool applications, greenhouses, feeding installations, zoos, fish farming or irrigation. GF Piping Systems has the right valve in any situation.

A simple and compact design is a key criteria in these applications. The type 355, a monoblock ball valve, features compact dimensions and low maintenance. By using standard union nuts and union ends, maximum flexibility and spare parts availability are guaranteed. The type 375 is also ideal for simple applications with chemicals. The special design of the 375 ball valve allows for easy maintenance, thus ensuring a long service life. The compact design makes it easy to install and remove this valve in piping systems.

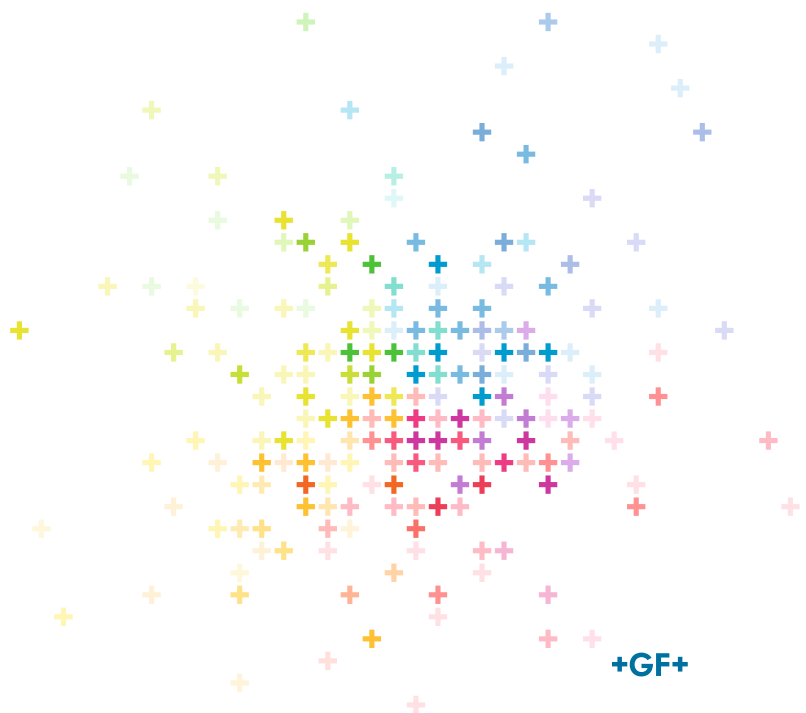

Worldwide at home

Our sales companies and representatives ensure local customer support in more than 100 countries.

www.gfps.com

Argentina / Southern South America

Georg Fischer Central Plastics Sudamérica S.R.L.
Buenos Aires, Argentina
Phone +54 11 4512 02 90
gfcentral.ps.ar@georgfischer.com
www.gfps.com/ar

Australia

George Fischer Pty Ltd
Riverwood NSW 2210 Australia
Phone +61 (0) 2 9502 8000
australia.ps@georgfischer.com
www.gfps.com/au

Austria

Georg Fischer Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43 (0) 2782 856 43-0
austria.ps@georgfischer.com
www.gfps.com/at

Belgium / Luxembourg

Georg Fischer NV/SA
1600 Sint-Pieters-Leeuw / Belgium
Phone +32 (0) 2 556 40 20
Fax +32 (0) 2 524 34 26
be.ps@georgfischer.com
www.gfps.com/be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04571-020 São Paulo/SP
Phone +55 (0) 11 5525 1311
br.ps@georgfischer.com
www.gfps.com/br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1 (905) 670 8005
Fax +1 (905) 670 8513
ca.ps@georgfischer.com
www.gfps.com/ca

China

Georg Fischer Piping Systems Ltd
Shanghai 201319
Phone +86 21 3899 3899
china.ps@georgfischer.com
www.gfps.com/cn

Denmark / Iceland

Georg Fischer A/S
2630 Taastrup
Phone +45 (0) 70 22 19 75
info.dk.ps@georgfischer.com
www.gfps.com/dk

Finland

Georg Fischer AB
01510 VANTAA
Phone +358 (0) 9 586 58 25
Fax +358 (0) 9 586 58 29
info.fi.ps@georgfischer.com
www.gfps.com/fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33 (0) 1 41 84 68 84
fr.ps@georgfischer.com
www.gfps.com/fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49 (0) 7161 302 0
info.de.ps@georgfischer.com
www.gfps.com/de

India

Georg Fischer Piping Systems Pvt. Ltd
400 083 Mumbai
Phone +91 22 4007 2000
Fax +91 22 4007 2020
branchoffice@georgfischer.com
www.gfps.com/in

Indonesia

PT Georg Fischer Indonesia
Karawang 41371, Jawa Barat
Phone +62 267 432 044
Fax +62 267 431 857
indonesia.ps@georgfischer.com
www.gfps.com/id

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +39 02 921 861
it.ps@georgfischer.com
www.gfps.com/it

Japan

Georg Fischer Ltd
530-0003 Osaka
Phone +81 (0) 6 6341 2451
jp.ps@georgfischer.com
www.gfps.com/jp

Korea

Georg Fischer Korea Co. Ltd
Unit 2501, U-Tower
120 HeungdeokJungang-ro
(Yeongdeok-dong)
Giheung-gu, Yongin-si, Gyeonggi-do
Phone +82 31 8017 1450
Fax +82 31 217 1454
kor.ps@georgfischer.com
www.gfps.com/kr

Malaysia

George Fischer (M) Sdn. Bhd.
40460 Shah Alam, Selangor Darul Ehsan
Phone +60 (0) 3 5122 5585
Fax +60 (0) 3 5122 5575
my.ps@georgfischer.com
www.gfps.com/my

Mexico / Northern Latin America

Georg Fischer S.A. de C.V.
Apodaca, Nuevo Leon
CP66636 Mexico
Phone +52 (81) 1340 8586
Fax +52 (81) 1522 8906
mx.ps@georgfischer.com
www.gfps.com/mx

Middle East

Georg Fischer Piping Systems (Switzerland) Ltd
Dubai, United Arab Emirates
Phone +971 4 289 49 60
gcc.ps@georgfischer.com
www.gfps.com/int

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31 (0) 578 678 222
nl.ps@georgfischer.com
www.gfps.com/nl

Norway

Georg Fischer AS
1351 Rud
Phone +47 67 18 29 00
no.ps@georgfischer.com
www.gfps.com/no

Philippines

Georg Fischer Pte Ltd
Representative Office
Phone +632 571 2365
Fax +632 571 2368
sgp.ps@georgfischer.com
www.gfps.com/sg

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48 (0) 22 31 31 0 50
poland.ps@georgfischer.com
www.gfps.com/pl

Romania

Georg Fischer Piping Systems (Switzerland) Ltd
020257 Bucharest - Sector 2
Phone +40 (0) 21 230 53 80
ro.ps@georgfischer.com
www.gfps.com/int

Russia

Georg Fischer Piping Systems (Switzerland) Ltd
Moscow 125040
Phone +7 495 748 11 44
ru.ps@georgfischer.com
www.gfps.com/ru

Singapore

George Fischer Pte Ltd
11 Tampines Street 92, #04-01/07
528 872 Singapore
Phone +65 6747 0611
Fax +65 6747 0577
sgp.ps@georgfischer.com
www.gfps.com/sg

Spain / Portugal

Georg Fischer S.A.
28046 Madrid
Phone +34 (0) 91 781 98 90
es.ps@georgfischer.com
www.gfps.com/es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46 (0) 8 506 775 00
info.se.ps@georgfischer.com
www.gfps.com/se

Switzerland

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41 (0) 52 631 3026
ch.ps@georgfischer.com
www.gfps.com/ch

Taiwan

Georg Fischer Co. Ltd
San Chung Dist., New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.gfps.com/tw

United Kingdom / Ireland

Georg Fischer Sales Limited
Coventry, CV2 2ST
Phone +44 (0) 2476 535 535
uk.ps@georgfischer.com
www.gfps.com/uk

USA / Caribbean

Georg Fischer LLC
9271 Jeronimo Road
92618 Irvine, CA
Phone +1 714 731 8800
Fax +1 714 731 6201
us.ps@georgfischer.com
www.gfps.com/us

International

Georg Fischer Piping Systems (Switzerland) Ltd
8201 Schaffhausen/Switzerland
Phone +41 (0) 52 631 3003
Fax +41 (0) 52 631 2893
info.export@georgfischer.com
www.gfps.com/int

The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing.
The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.