


SECURI-MESH® PLUS SR2

**Jacksons
Fencing**



The Securi-Mesh® Plus SR2 rated system provides an ideal solution for a wide variety of higher security perimeter applications with its double layer of “358” mesh and small apertures which eliminate foot and finger holds and prevent objects from being passed through. The vertical steel clamp bars employed in the panel to post fixing and to bond the mesh layers together provide increased rigidity to the design and make the system particularly resistant to cutting through using conventional hand and portable power tools.

- LPS 1175 SR2 Approved
- Secured by Design Preferred Specification
- Stainless steel fixings
- Jaktronic® PIDS compatible
- 25-year service life guarantee

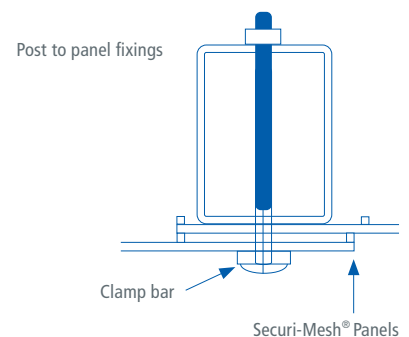

APPLICATIONS



- ✓ High risk
- ✓ Perimeters
- ✓ Utilities sites

PANELS

The Securi-Mesh® Plus SR2 has staggered double skin of 76.2mm x 12.7mm resistance mesh welded at each intersection up to 2400mm only. Second panel is an internal skin only, single skin then from 2400mm upwards.

GATES

SR2 gates available

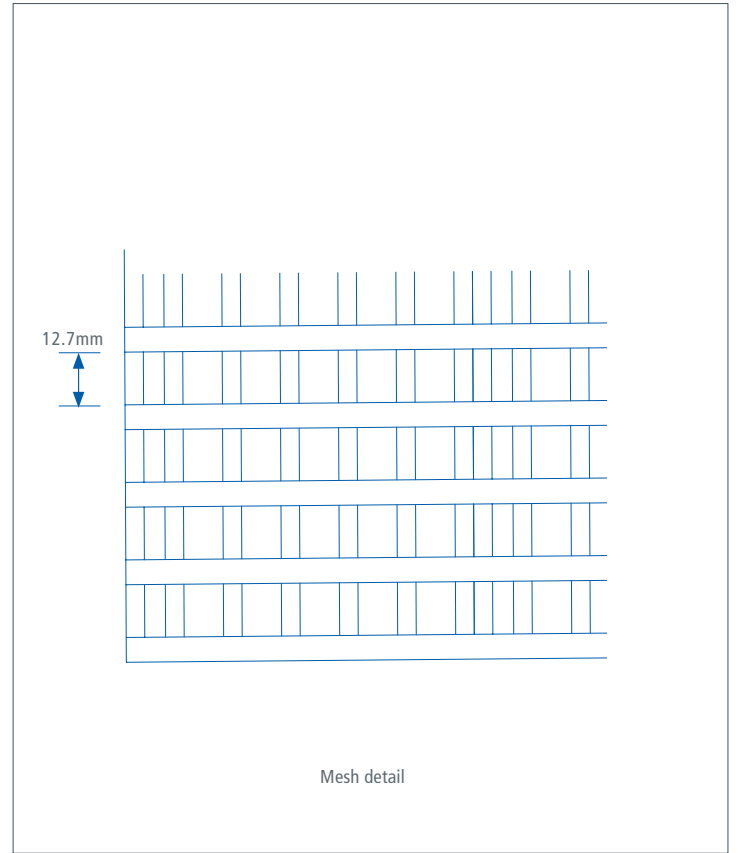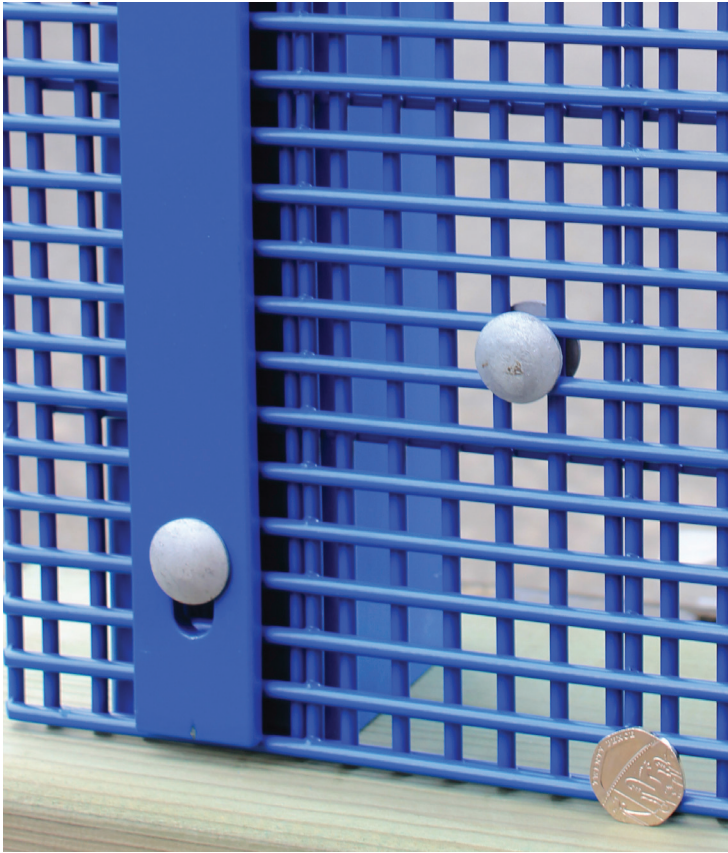

| HEIGHT (MM) | POST CENTRES (MM) | POST DIMENSIONS (MM) | OVERALL POST LENGTH (MM) |
|-------------|-------------------|-------------------------------------|--------------------------|
| 2442 | 2442 | 120 x 60 or 80 x 60 to suit site | 3250 |

FINISHES

- Panels are Galvan® zinc alloy coated to BS EN 10244-2:2009 class A as standard
- Powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request

APPROVALS

LPS 1175 SR2

