


## BARBICAN® BARBED TOP



Barbican® Barbed Top panels are up to 3000mm high and have two horizontal hollow section rails 60 x 40mm (3 rails on 3000mm high). A 10mm round point bar is added to each pale downward pointing.

- Posts can be customised for Barbed wire / Razor wire / Rota Spike®
- Vertical pale spacing conforms to building regulations for anti-trap
- Unique vandal-proof panel to post connectors
- Panels can be manufactured to accommodate sloping ground
- Anti-climb design
- 25-year service life guarantee



Post to panel fixings

### APPLICATIONS


- ✓ Perimeters
- ✓ Commercial premises
- ✓ Medium risk

### PANELS

Barbican® Barbed Top panels are up to 3000mm high and have two horizontal hollow sections rails 60 x 40mm (3 rails if 3000mm high). Vertical rectangular hollow section 25 x 25mm pales are passed through the rails with standard spacing at 129mm centres, which has a 10mm round pointed bar added to each pale.

### GATES

Matching gates available

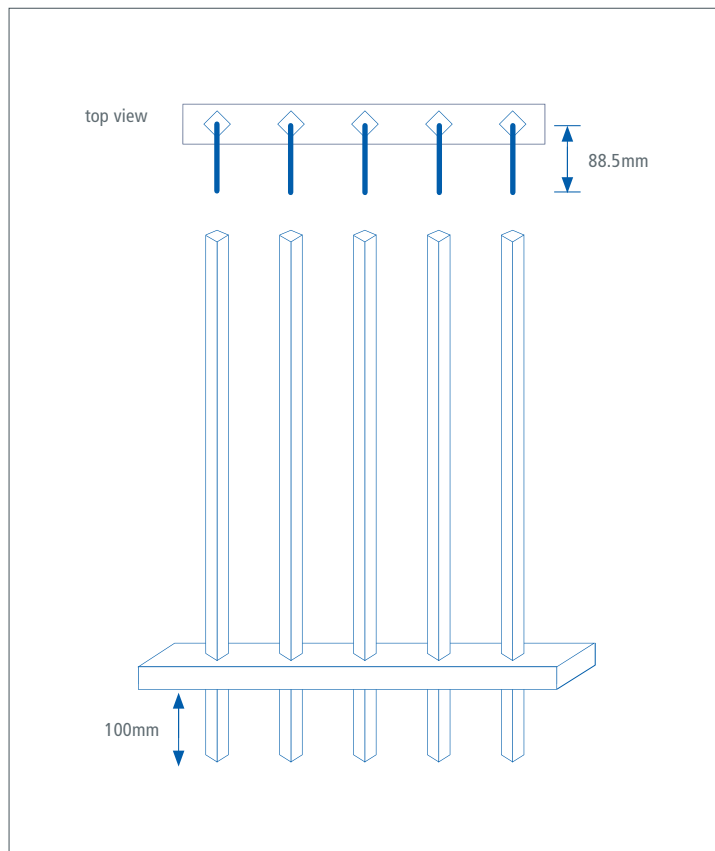

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	OVERALL POST LENGTH (MM)
2250	3000	80 x 60	3050
2500	3000	80 x 60	3300
2750	2484	80 x 60	3550
3000	2484	80 x 60	3800

### POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete
- Cranked to suit wall mounting

### FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

### STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request