


Hörmann Retractable Plus

Maximum clear passage
for narrow openings

New Construction Features:

- Newly designed arm
- Non-protruding springs

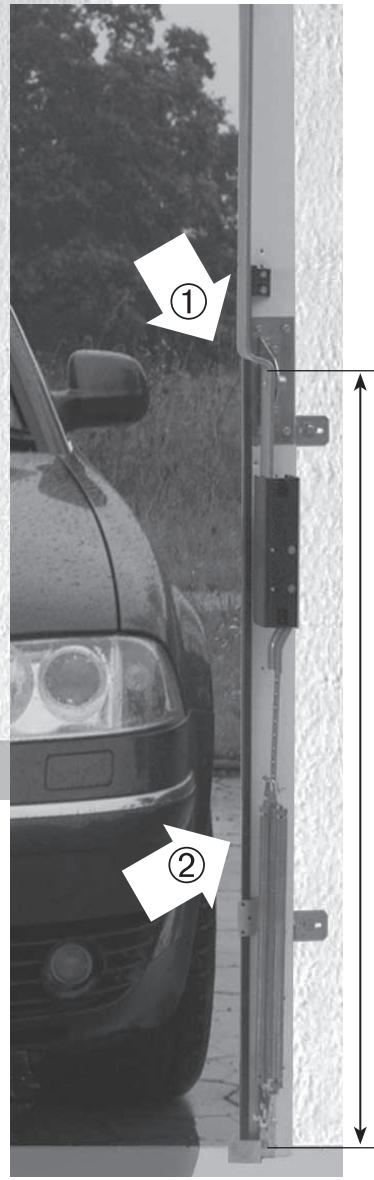

Still conforming to BS EN 12604 but using specially designed lifting arms and bottom spring bracket whilst retaining many of the tried and tested components to produce this “retractable plus” gear. This gear allows for an additional clear drive through passage height of 295 mm, whilst reducing the lifting arm protrusion by 30 mm each side.

Available for door sizes:

(Only available on doors up to 7'6" wide and the following heights)

Door height	Clear height below lifting arms before installing Retractable Plus	Clear height below lifting arms after installing Retractable Plus
7'0"	970	1265
6'6"	885	1180
6'4"	760	1055

- ① Newly designed arm
- ② Non-protruding springs for increased clear passage!

Hörmann (UK) Ltd, Gee Road, Coalville, Leicestershire LE67 4JW,
Tel (01530) 513000, Fax (01530) 513001

