


Scoutmoor Yorkstone

Date Created: 07/02/19

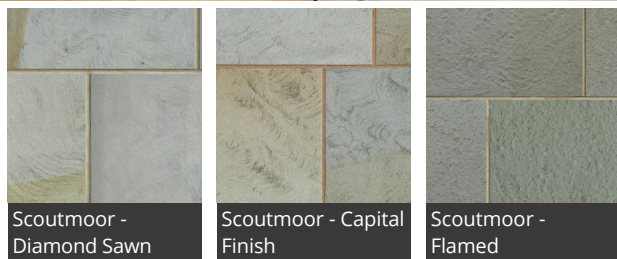

Scoutmoor -
Diamond Sawn

Scoutmoor - Capital
Finish

Scoutmoor -
Flamed

*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

Scoutmoor Yorkstone is a blue grey to brown coloured stone popular in projects across the UK thanks to its impressive technical performance. The strongest type of Yorkstone available in the UK, it is perfect for paved applications thanks to its strength, durability and class-leading slip resistance. Suitable for both pedestrian and trafficked areas, it's a reliable and hardwearing addition to any commercial or public space. As well as paving, Scoutmoor Yorkstone is suitable for setts, kerbs, tactile, steps, water management, special shaped paving and low level masonry veneers for planters and seats.

Textures include Diamond Sawn, Capital finish, and Flamed textured. Fully tested to the appropriate standards and CE marked to the latest legislation, the Scoutmoor quarry and manufacturing works are both ISO9001 accredited, and also meet ISO45001 and ISO14001 standards of health, safety and sustainability.

DESCRIPTION

Appearance	Blue Grey to Brown fine grained Yorkstone
Manufacturing Process	Sawn
Geological Type	Millstone Grit series, Carboniferous sandstone
Quarry of Origin	Scoutmoor Quarry, Lancashire
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Pale greenish grey fine grained sandstone
CE Marking/DOP	https://www.marshalls.co.uk/dop

Scoutmoor Yorkstone

Date Created: 07/02/19

PHYSICAL PROPERTIES

Work Dimensions (mm)	400 x 300 x 63 450 x 450 x 50 450 x 450 x 63 450 x 450 x 75 900 x 450 x 50 900 x 450 x 63 900 x 450 x 75 600 x 600 x 50 600 x 600 x 63 600 x 600 x 75 900 x 600 x 50 900 x 600 x 63 900 x 600 x 75 200 x 100 x 50 200 x 100 x 63 200 x 100 x 75 300 x 100 x 50 300 x 100 x 63 300 x 100 x 75 300 x 150 x 50 300 x 150 x 63 300 x 150 x 75 300 x 200 x 50 300 x 200 x 63 300 x 200 x 75
Tolerances on Work Dimensions (mm)	Paving Class 1 tolerances to all dimensions as standard Setts Class 2 tolerances to all dimensions as standard Kerbs Class 2 tolerances to all dimensions as standard Others by agreement
Abrasion Resistance (mm)	18.5mm (Mean value to EN 14157 : 2004 (Hev = 21.3mm))
Durability (Freeze-thaw)	24/21.9 MPa (Mean values to EN 12371 : 2006)
Material Density	2551 kg/m ³ (Mean value to EN 1936 : 2006)
Open Porosity (%)	5% (Mean value to EN 1936 : 2006)
Compressive Strength (MPa)	182 MPa (Mean value to EN 1926 : 2006 (Lev = 178 MPa))
Water Absorption (%)	1.96% (Mean value to EN 13755 : 2008 (Hev = 2%))
Transverse/FlexuralSplit/Breaking	21.12 MPa (Mean value to EN 12372 : 2006 (Lev = 21 MPa))

TEXTURE SPECIFIC PROPERTIES

	Diamond Sawn	Capital	Fine Sawn	Flamed
Light Reflectance Value (LRV)	27.83	28.98	27.83	34.97
Surface Roughness (Rz-µm)	41	>75	38	52

MANUFACTURING

Materials Control	CE Marked to BS EN 1341 Paving, 1342 Setts, 1343 Kerbs
-------------------	--

SUSTAINABILITY

ERI Score	Our Score: 4.3 Cluster Score: 3.3
	Carbon Footprint (KgCO ₂ each)
Scoutmoor Yorkstone Paving 300 x RL x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 300 x RL x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 300 x RL x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 450 x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 450 x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 450 x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 900 x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 900 x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x 900 x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x RL x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x RL x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 450 x RL x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 600 x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 600 x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 600 x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 900 x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 900 x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x 900 x 75	37.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x RL x 50	25 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x RL x 63	31.5 kg CO ₂ m ²
Scoutmoor Yorkstone Paving 600 x RL x 75	37.5 kg CO ₂ m ²

Scoutmoor Yorkstone

Date Created: 07/02/19

TEXTURE SPECIFIC PROPERTIES

Slip Resistance (BS 14231) (Dry)	99	102	88	103
Slip Resistance (BS 14231) (Wet)	85	86	70	69.9

SUSTAINABILITY

Scoutmoor Yorkstone Setts 200 x 100 x 50	25 kg CO2 m ²
Scoutmoor Yorkstone Setts 200 x 100 x 63	31.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 200 x 100 x 75	37.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 100 x 50	25 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 100 x 63	31.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 100 x 75	37.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 150 x 50	25 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 150 x 63	31.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 150 x 75	37.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 200 x 50	25 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 200 x 63	31.5 kg CO2 m ²
Scoutmoor Yorkstone Setts 300 x 200 x 75	37.5 kg CO2 m ²


FURTHER INFORMATION

Contact Us For technical information on the design, specification and construction when utilising the product, contact the Technical Advisory Services Department on 0370 411 2233

Scoutmoor Yorkstone

Date Created: 07/02/19

Suggested Plan Sizes

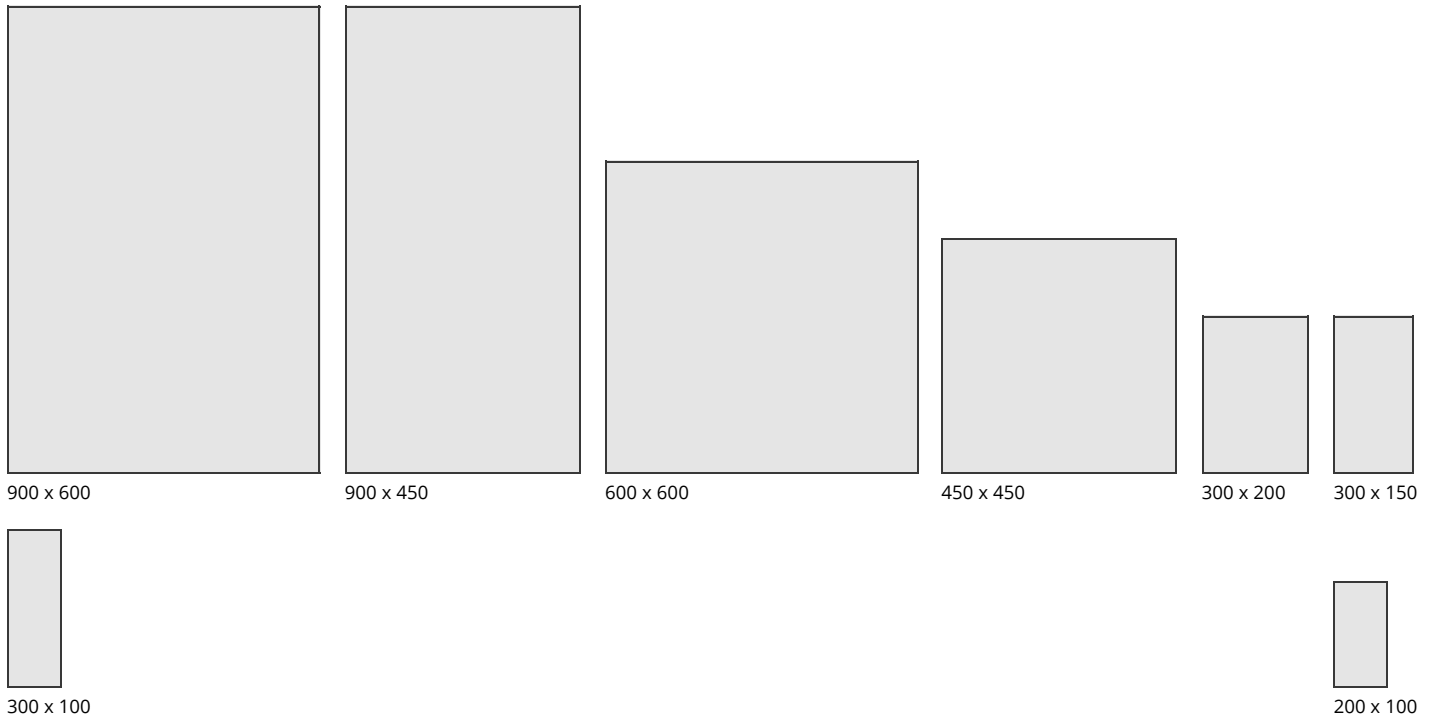

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.