

Resin Bond - RESIN AGGREGATE SURFACING



An extremely hard wearing resin bonded aggregate surface. Offering a natural pleasing appearance of loose aggregate without any of the setbacks that come with loose aggregate surfaces.

USES:

- Heritage Sites
- Car Parks and Access Areas
- Restoration and Regeneration Projects
- Driveways and Courtyards
- Parks and Open Spaces
- Pavements and Community Areas and more...

BENEFITS:

- Aesthetically pleasing
- ♦ Harmonises perfectly with surroundings
- ◆ Offers excellent anti-slip properties
- Simple and fast to lay
- ♦ Fast installation
- Extremely durable
- Low maintenance





AGGREGATE OPTIONS:

Vast range of natural and recycled aggregates available – graphics created as required.










See many more online at meonuk.com

PREPERATION AND APPLICATION:

DekorGrip resin bond is a two part resin dressing that can be applied to asphalt, concrete, timber or steel surfaces. Surfaces must be must be dry, clean, dust free and smooth (free of undulations and irregularity.)

Asphalt surfaces must be closed off using Meon DekorCryl void filler in order to prevent resin from being absorbed by the asphalt during application. Concrete surfaces require Meon Concrete Primer.

The two part resin is thoroughly mixed using a whisk and spread onto the surface with a serrated squeegee, selected dried aggregate is then broadcast. All excess aggregate is swept off once resin has cured.

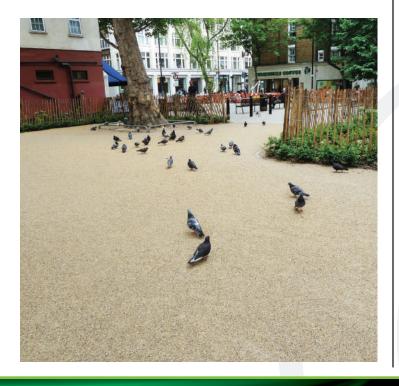



SUPPORT AND MAINTENANCE:

- Samples, full method and safety data sheets, demonstrations and on-site application supervision available.
- Constant helpline to answer questions and do the calculations for you.
- Oil, dirt and stains removed by applying DekorClean detergent.
- A pressure washer can be used to restore its original beauty time after time.



MEON UK

TEL: +44 (0)808 118 1922 EMAIL: mail@meonuk.com

WEB: meonuk.com

MEON IRELAND

TEL: 01 840 7647

EMAIL: info@meonireland.com

WEB: meon.ie