


Wraptite-FZ

AIRTIGHTNESS

WHY CHOOSE WRAPTITE-FZ?

Wraptite-FZ is a vapour permeable airtight membrane for use at floor junctions. It is durable, flexible and lightweight, and offers temporary protection against wind driven rain, snow and dust. Wraptite-FZ conforms to the Construction Products Directive and is manufactured under control of an ISO9001 quality management system.

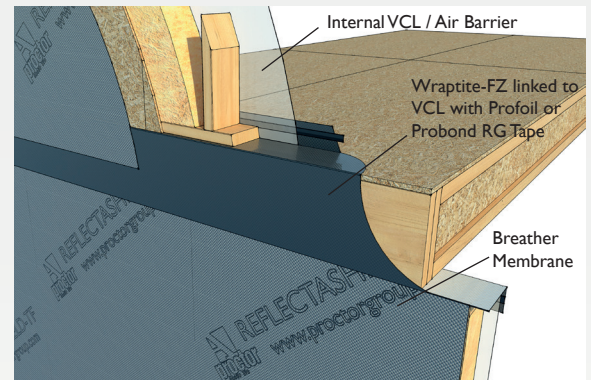

Cassette Floor Junction

PRODUCT CHARACTERISTICS

PROPERTY	TEST/STANDARD		RESULT	
Roll size			1 m x 50 m 750 mm x 50 m	
Product Code			FNS 170	
Mass per unit area	EN 1849-2		170 g/m ² (+/- 10 g/m ²)	
Reaction to fire	EN 13501-1		Class D, d2*	
Water vapour resistance Sd	EN ISO 12572		0.029 m (+/- 0.01)	
Water penetration	EN 1928	Before ageing: After ageing:	Class W1 Class W1	
Tensile strength	EN 12311-1	Before ageing: After ageing:	MD 400 N (-80 N) MD ≥ 50%	CD 260 N (-50 N) CD ≥ 50%
Elongation	EN 12311-1	Before ageing: After ageing:	MD 80% (-20%) MD ≥ 50%	CD 100% (-22%) CD ≥ 50%
Tear resistance	EN 12310-1		MD 190 N (-50 N)	CD 190 N (-60 N)
Flexibility at low temperature	EN 1109		No cracking at minus 60°C	

*When tested to EN 11925-2



Insert Code
136

May 2018



Download a full Wraptite brochure from our website...

www.proctorgroup.com

wraptite@proctorgroup.com | +44 (0) 1250 872261

Proctor
Group