


Plain Square Bollard 1000mm Above Ground 50mm² - 150mm² Galvanised and Black & White

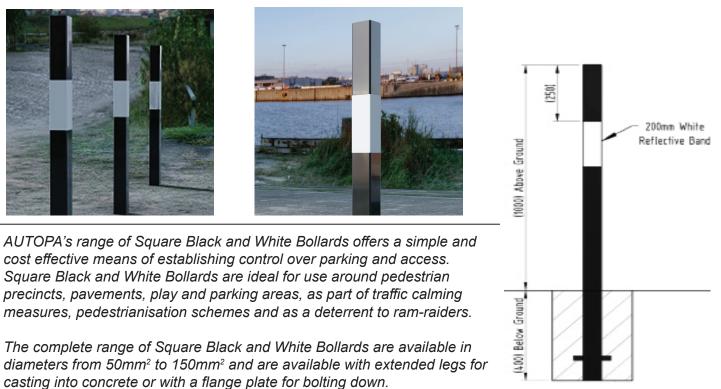

Additional colours and removable versions are also available.

<u>Part Number</u>	Description	<u>Weight (kg</u>
138 121 861BW	50mm x 50mm, Concrete In	6.2kg
138 121 851BW	60mm x 60mm, Concrete In	7.6kg
138 121 870BW	70mm x 70mm, Concrete In	8.8kg
138 121 879BW	80mm x 80mm, Concrete In	10.2kg
138 121 881BW	90mm x 90mm, Concrete In	11.6kg
138 121 821BW	100mm x 100mm, Concrete In	13.0kg
138 121 829BW	120mm x 120mm, Concrete In	25.1kg
138 121 604BW	150mm x 150mm, Concrete In	32.0kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Loose cap available for filling with concrete on site
- Colour coated Black with a 200mm White reflective band
- Supplied with welded flat steel cap
- Bolt Down versions available

Installation & use

Concrete In Plain Bollards require an excavated hole (no less than 400mm3) for installation. AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk &44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP



FM 31071 EMS 503166 OHS 552103