




Plain Round Bollard 1000mm Above Ground 244mm - 406mm Diameter Galvanised

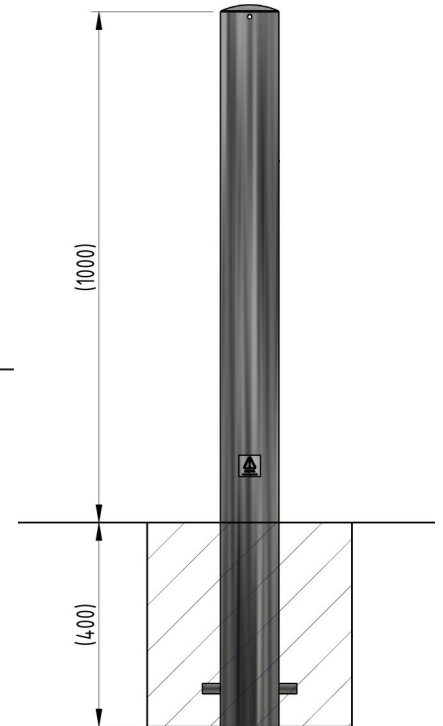

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 48mm to 406mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

Part Number	Description	Wall Thickness	Weight (kg)
138 122 053	244mm Galvanised (Concrete In)	8mm	64.4kg
138 122 103	273mm Galvanised (Concrete In)	8mm	76.4kg
138 121 153	305mm Galvanised (Concrete In)	10mm	105.5kg
138 121 203	323mm Galvanised (Concrete In)	8mm	90.1kg
138 121 253	355mm Galvanised (Concrete In)	10mm	123.7kg
138 121 303	368mm Galvanised (Concrete In)	10mm	128.6kg
138 121 353	406mm Galvanised (Concrete In)	10mm	142.4kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Reflective bands available
- Supplied with welded steel cap
- Loose cap available for filling with concrete on site

Installation & use

Concrete In Plain Bollards require an excavated hole (no less than 400mm³) for installation. AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

