




AUTOPA

Door Guard Thin Galvanised

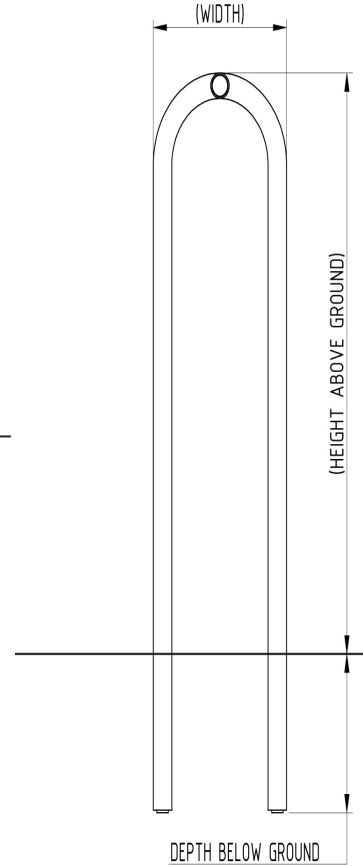

AUTOPA Door Stops are designed to protect walls from being damaged by swinging doors. An integrated rubber stopper acts as a shock absorber, preventing the door from hitting the steel frame. Ideal for commercial and industrial sites, they are suitable for internal and external use and can be installed either individually or in pairs.

Extremely durable, AUTOPA's Door Stops are manufactured from galvanised mild steel and available with flange plates for bolting down or extended legs for casting into concrete. Colour coated finishes are also available (please state BS/RAL number at time of order).

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 206 035	Door Guard (Concrete In)	9.0kg
138 206 031	Door Guard (Bolt Down)	9.0kg
138 100 994	M12 Expanding Bolt (6 required per door guard)	
138 100 993	M12 Foundation Bolt (6 required per door guard)	
138 100 995	M12 Rawl Bolt (6 required per door guard)	

Product details

- 1100mm Tall
- 48mm diameter tube
- 3mm wall thickness (galvanised)
- 350mm wide
- Concrete In version 300mm below ground

Installation & use

When fully open door stops should sit parallel to the door. Ensure that door handles do not make contact with the door stop when opening to prevent damage. Bolt down Door Guards require bolting to a suitable concrete surface (no less than 300mm³ per leg) by means of six M12 bolts. Concrete In Door Guards require an excavated hole (no less than 350mm deep per leg) for casting into concrete. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

