




# Hooped Perimeter Barrier 60mm Diameter Galvanised, Concrete In

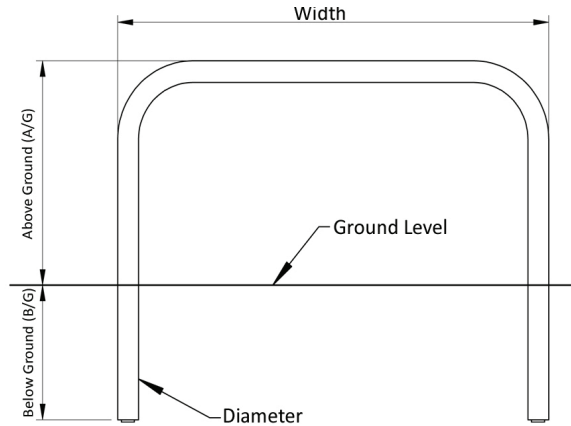

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra. Tube diameters 48mm, 60mm, 76mm & 90mm available.



Part Number	Description, Height above ground x overall width
138 176 038	500 x 750 (Concrete in)
138 176 044	500 x 1000 (Concrete in)
138 176 050	500 x 1500 (Concrete in)
138 176 056	500 x 2000 (Concrete in)
138 176 064	750 x 1000 (Concrete in)
138 176 070	750 x 1500 (Concrete in)
138 176 076	750 x 2000 (Concrete in)
138 176 084	1000 x 1000 (Concrete in)
138 176 090	1000 x 1500 (Concrete in)
138 176 096	1000 x 2000 (Concrete in)

## Product details

- Concrete in, 300mm below ground
- 60mm Diameter Galvanised Steel Tube
- Colour coated options available extra


## Installation & use

Each leg of the barrier requires a hole of approximately 400mm<sup>3</sup> and then concreted in for installation. This product is guaranteed for 12 months (*if installed and used correctly*)



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP



FM 31071 EMS 503166 OHS 552103