




Lady LED/ bollard 80 cm



Lightstacks and bollards

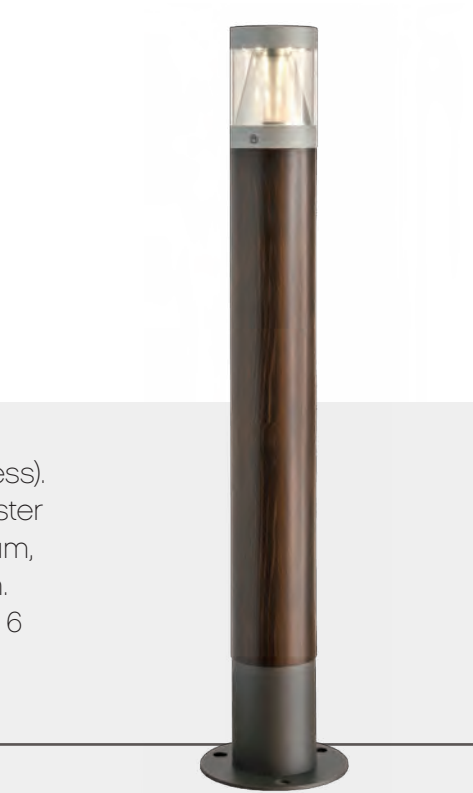



DESCRIPTION:

Cylindrical shaft in glued laminated timber certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests (PEFC or FSC). Timber finished with three coats of

woodstain (Aubrilam HTE process). Base in galvanised steel, polyester powder coated. Top in aluminium, polyester powder coating finish. Diffuser in clear polycarbonate. 6 LEDs 1.2W.
Technical data sheet p. 247



Lady LED/ bollard

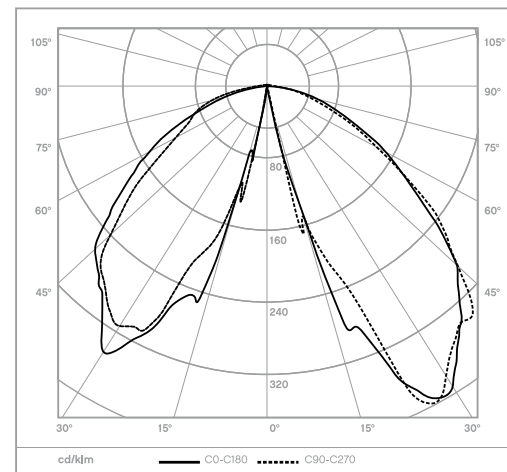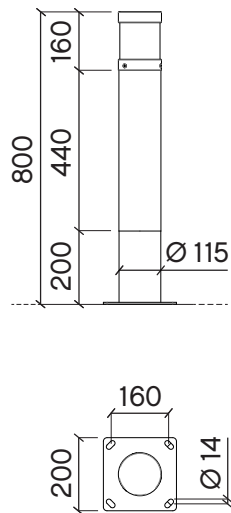

Photometrics/ 6 LEDs 1,2W

REFERENCE: ON BASE PLATE PBE0142 / WITH BURIED ROOT
PBE0147



SUPPORT

DESCRIPTION: Cylindrical shaft in glued laminated timber certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests (PEFC or FSC). Timber finished with three coats of woodstain (Aubrilam HTE process). Base in galvanised steel, polyester powder coated. Top in aluminium, polyester powder coating finish. Diffuser in clear polycarbonate.
ANCHOR BOLTS: M12 x 200

HEAD

POWER: 6 LEDs 1,2W
LAMP TYPE: LED Supplied
HEAD COLOUR: Grey 900 sanded
CONNECTION: No terminal block, pre-cabled 3 x 1,5² length 1m
IP: 65
IK: 09
CLASSE: I

Tosca/ bollard

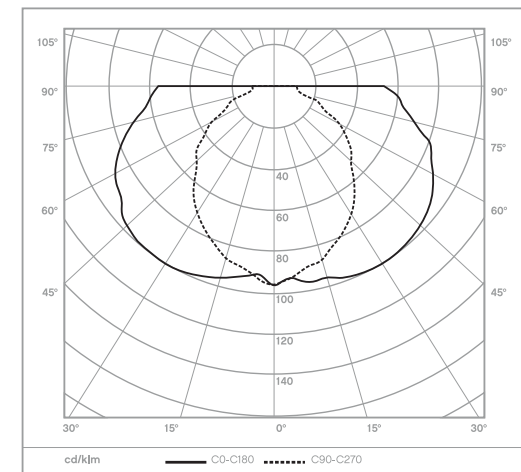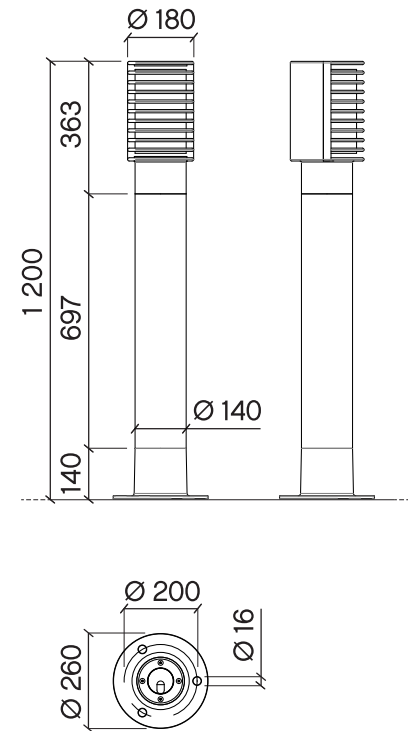

Photometrics/ 26W FC

REFERENCE: PBE0109

SUPPORT

DESCRIPTION: Cylindrical shaft in glued laminated timber certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests (PEFC or FSC). Timber finished with three coats of woodstain (Aubrilam HTE process). Base in cast aluminium. Top in cast aluminium and polycarbonate. Frosted protective glass.
ANCHOR BOLTS: M12 x 200

HEAD

PUISSANCE: 26W
LAMP TYPE: Compact fluorescent (not supplied)
SOCKET: G24d-3
HEAD COLOUR: Grey 150 sanded
CONNECTION: Terminal block 2 x 2,5² max without fuse
IP: 54
IK: 06
CLASS: II