

# STUART

## ST 15/60 B (130) Circulator 230V

The Stuart ST 15/60 B Circulator features the latest in high efficiency technology offering an EEI rating of just 0.18 and proportional pressure control.

For use in new systems or as a replacement unit, this bronze circulator is suitable for domestic hot water recirculation and heating systems.



### Features

- ECM permanent magnet technology
- Constant speed (3 settings)
- Proportional pressure control
- Automatic venting cycle
- Robust bronze pump housing
- Continuously rated
- Ceramic bearings
- 130 mm fitting length
- EuP/ErP compliant

This product is an ideal replacement for:

Grundfos: UPS 15/50N



Dab: VS 65/150B

CPL: SE60B

Wilo: SB30


### Application

- With a maximum performance of 3.3 m<sup>3</sup>/h and maximum head of 5.8 metres the ST 15/60 B is a competitive solution to most domestic hot water recirculation systems

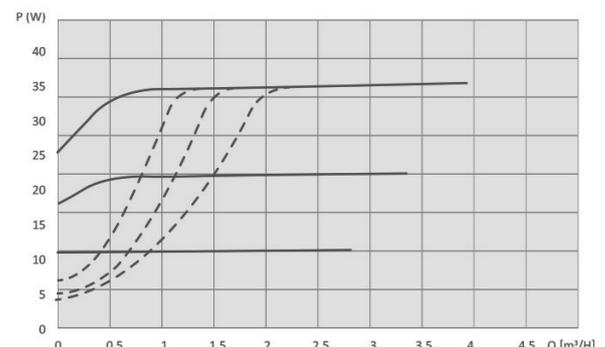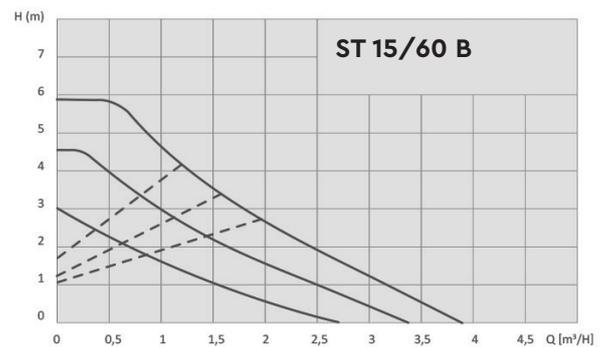

Pump Model		ST 15/60 B (130) Circulator 230 V 47074				
General	Guarantee	3 year				
Features	Pump type	Centrifugal				
	Fitting length	130 mm				
	Speed settings	3				
Materials	Pump body	Bronze				
	Impeller	Noryl				
	Bearings	Ceramic				
Performance	Maximum head (closed valve)	5.8 metres				
	Maximum flow	3.3 m <sup>3</sup> /h				
	Maximum working pressure*	10 bar				
	Min. inlet pressure	0.05 bar <75 °C (fluid temperature) 0.28 bar <90 °C (fluid temperature)				
	Maximum ambient air temperature	35	50	60	70	°C
	Max water temperature	110	100	90	80	°C
Connections	Pump connections	Rp 1½ "				
Motor	Type	Canned rotor				
	Duty rating	Continuous (S1)				
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz				
	Power consumption	36 Watts (max.)				
	Current (full load)	0.32 Amps				
	Fuse rating	5 Amps				
	Insulation class	F				
	EEL	0.18				
	Efficiency	38 %				
Physical	Enclosure protection	IP44				
	Length	132 mm				
	Width	125 mm				
	Height	130 mm				
	Weight	2.2 Kg				

\* The maximum pressure that can be applied to the unit under any installation conditions.

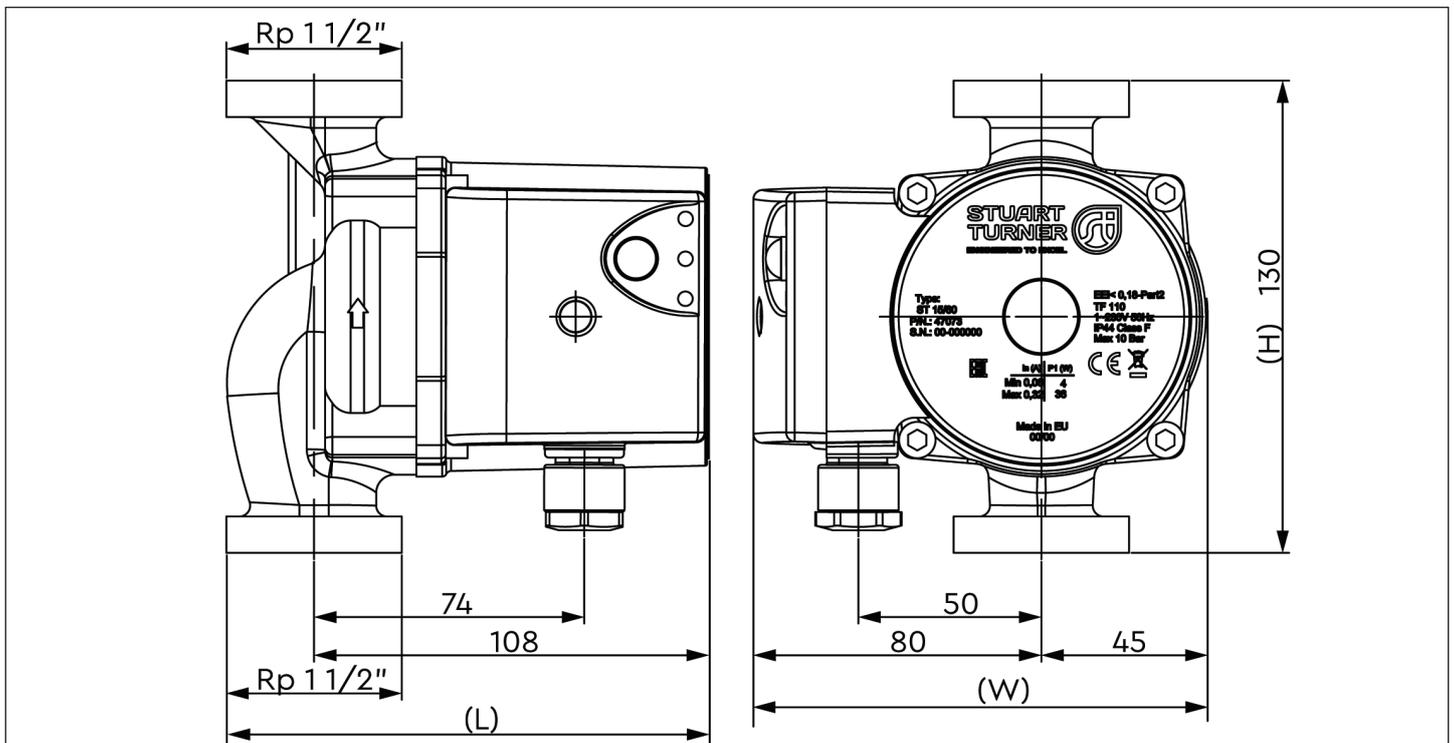

Stuart Turner Limited reserves the right to amend specifications without notice.

Stuart Turner Ltd, Henley-on-Thames, Oxfordshire RG9 2AD Tel: +44 (0) 1491 572655 Fax: +44 (0) 1491 573704  
TechAssist Helpline +44 (0) 800 31 969 80  
www.stuart-turner.co.uk

Pt. No. 20887 Issue 3619/1-02