


decorative edging system

- Versatile alternative to traditional concrete kerbs
- Dual purpose profile offers various laying options (splayed or bullnosed)
- Vibrant long-lasting colours
- Offers ease of installation
- Kerbsett Specials are available

product specifications


Product type	Concrete Kerb
Manufactured to	BS EN 1338:2003
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	> 3.6MPa
Installed to	BS 7533-6:1999
BSPlus	Q10 150
Applications	Residential and Commercial when used in conjunction with the correct sub-base design in accordance with the latest British Standard.
Energy used	100% renewable energy
Water used	100% water used from rainwater harvesting system
Carbon Footprint	11kgCO ₂ e/lm
Recyclable	100% of this product can be recycled
Manufacturing location	Produced in the UK with locally sourced materials
breem rating www.bre.co.uk	Refer to the Green Guide to Specification, 4th Edition 2009.
Tobermore products are manufactured in accordance with an accredited ISO 9001:2008 quality system. Manufacturing facilities are accredited to ISO14001:2004 Environmental Management. The company publish Environmental labels and declarations in accordance with BS EN ISO 14021:2001.	

product profile




laying details


High Rise



Low Rise



colours

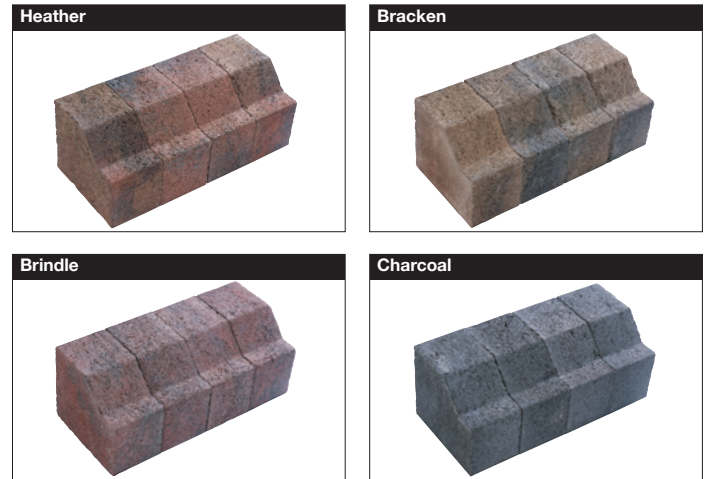

product	size (mm)	colours available	in stock	lm per pack	lm per slice	no. per pack	weight (kg) per pack
KERBSETT	190 x 160 x 100	Bracken, Brindle, Charcoal, Heather	YES	24	4	240	1497

Refer to all instructions and warnings on our website