


## vibrant granite appearance

- Can improve air quality by reducing NO<sub>2</sub>
- Manufactured with sparkling natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Significantly reduced efflorescence
- Creates a striking, contemporary look
- Step Flags are available

## product specifications

| <b>AirClean<sup>®</sup></b>  | Up to 16% NO <sub>2</sub> reduction (average 4% -16% reduction)<br>Better results with Silver & Sandstone  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
|--|--|------|------|------|------|------|------|--------|-----|-----|-----|-----|-----|----------|-----|-----|-----|-----|-----|
| <b>Product type</b>  | Concrete Paving Flag   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Paving Flag Manufactured to</b>   | BS EN 1339:2003  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Surface layer</b>   | Hard wearing surface layer with a minimum of 4mm and >390kgs/m <sup>3</sup> cement   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Granite content</b>   | Not less than 57% of granite aggregate in surface layer for Silver and Graphite; Not less than 46% of granite aggregate in surface layer for Sandstone;  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Efflorescence</b>   | Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Strength</b>  | > 3.5MPa   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Slip/Skid resistance</b>  | Extremely Low (>75 USRV)   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Installed to</b>  | BS 7533-4:2006   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>BSI Plus</b>  | Q25 315  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Applications</b>  | Suitable for all pedestrian areas and traffic-free zones. Some of these specific sizes are suitable for occasional vehicular overrun. Always refer to BS 7533-8:2003 for guidance on the correct flag size to suit your application.   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Energy used</b>   | 100% renewable energy  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Water used</b>  | 100% water used from rainwater harvesting system   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Recyclable</b>  | 100% of this product can be recycled   |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Recycled content</b><br>(Not less than %)   | <table border="1"> <thead> <tr> <th></th> <th>35mm</th> <th>40mm</th> <th>50mm</th> <th>65mm</th> <th>70mm</th> </tr> </thead> <tbody> <tr> <td>Silver</td> <td>22%</td> <td>20%</td> <td>16%</td> <td>12%</td> <td>11%</td> </tr> <tr> <td>Graphite</td> <td>22%</td> <td>20%</td> <td>16%</td> <td>12%</td> <td>11%</td> </tr> </tbody> </table> |      | 35mm | 40mm | 50mm | 65mm | 70mm | Silver | 22% | 20% | 16% | 12% | 11% | Graphite | 22% | 20% | 16% | 12% | 11% |
|  | 35mm   | 40mm | 50mm | 65mm | 70mm |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| Silver   | 22%  | 20%  | 16%  | 12%  | 11%  |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| Graphite   | 22%  | 20%  | 16%  | 12%  | 11%  |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>Manufacturing location</b>  | Produced in the UK with locally sourced materials  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| <b>breem rating</b><br>www.bre.co.uk   | <b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved by using a recycled sub-base.  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |
| Tobermore products are manufactured in accordance with an accredited ISO 9001:2008 quality system. Manufacturing facilities are accredited to ISO14001:2004 Environmental Management. The company publish Environmental labels and declarations in accordance with BS EN ISO 14021:2001. |  |      |      |      |      |      |      |        |     |     |     |     |     |          |     |     |     |     |     |

## colours

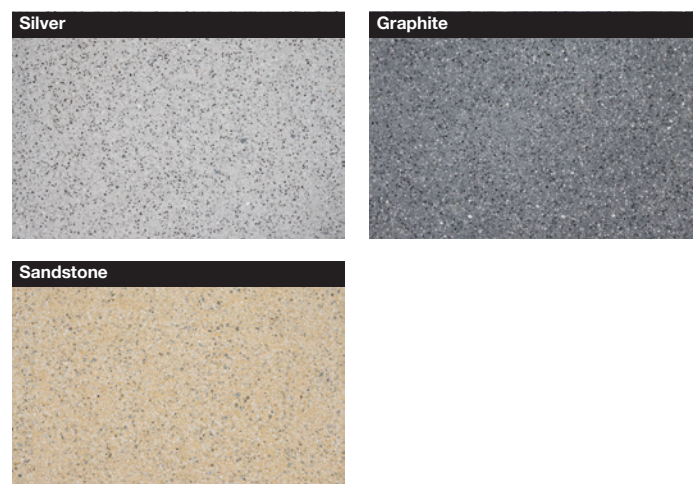

Mayfair Flags Sandstone, Silver & Graphite

| product                             | size (mm)      | finish           | edge      | colours available           | in stock      | no. per m <sup>2</sup> | no. per pack | weight (kg) per pack |
|-------------------------------------|----------------|------------------|-----------|-----------------------------|---------------|------------------------|--------------|----------------------|
| AIRCLEAN <sup>®</sup> MAYFAIR FLAGS | 450 x 450 x 70 | GRANITE TEXTURED | CHAMFERED | Graphite, Sandstone, Silver | SPECIAL ORDER | 4.94                   | 15           | 512                  |
|                                     | 450 x 450 x 50 | GRANITE TEXTURED | CHAMFERED | Graphite, Sandstone, Silver | SPECIAL ORDER | 4.94                   | 20           | 470                  |

Refer to all instructions and warnings on our website

