

Kerbstone


Tumbled kerb edging.

Kerbstone has an antique appearance created using our innovative tumbling process, producing a warm aged finish on all sides of the kerb. Kerbstone can be laid in any orientation.

- Tumbled to give an aged, antique appearance
- Vibrant long-lasting colours
- All sides are finished so it can be laid in any orientation

Ef-Stop^{*}







Sizes



tobermore.co.uk

Kerbstone



Specification

Ef-Stop[®]

Product type	Concrete Kerb					
Manufactured to	BS EN 1338:2003					
Installed to	BS 7533-6:1999					
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence					
Strength	Typical tensile splitting strength of >3.6MPa					
៣১ភ	Plus Q10 150 Create 45-20-64/370					
Applications	Residential and Commercial when designed in accordance with the latest British Standard. Available from www.bsigroup.con					
Energy used	100% renewable energy					
Water used	100% from our rainwater harvesting system and groundwater bore hole					
Recycled content	Not less than 10% (all colours except natural)					
Carbon footprint	190x160x100mm 1.2kgCo ² e/ea 104x173x80mm 0.6kgCo ² e/ea					
Recyclable	100% of this product can be recycled					
Manufacturing & Delivery	From one location within the UK					
breeam rating www.bre.co.uk	Refer to the Green Guide to Specification, 4th Edition 2009.					

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736 NI: 028 7964 2411 ROI: 048 7964 2411




Kerbstone



Stock

product	size (mm)	colours available	in stock	no. per slice	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Kerbstone BIM	190 x 160 x 100	Bracken, Cedar, Charcoal, Heather, Natural	YES	35	210	1460	1450
	104 x 173 x 80	Bracken, Charcoal, Heather, Natural	YES	72	504	1638	1628

BIM - This product is available to download from our website in BIM Level 2 format.

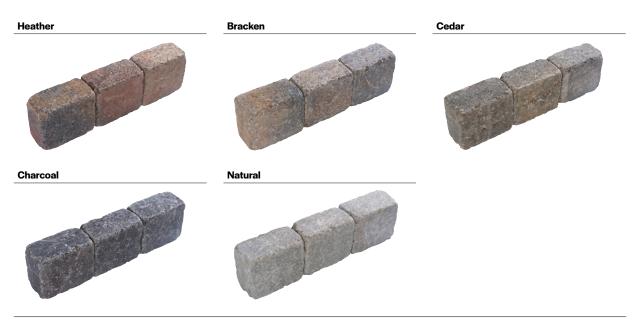

Contact Us GB: 0844 800 5736 NI: 028 7964 2411 ROI: 048 7964 2411 Email technical@tobermore.co.uk sales@tobermore.co.uk tobermore.co.uk