

Hydropave Fusion

Permeable paving with natural granite aggregates.

Hydropave Fusion is a popular permeable block paving product, manufactured with a natural granite appearance creating a striking, contemporary look.

- Functions as a SuDS paving system
- Granite appearance
- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Creates a striking, contemporary look

 **PrimeTop®**

 **Ef-Stop®**

TGA

Textured
Granite Aggregate

Finish



Pedestrian
Use



Light
Traffic



Commercial
Traffic

Refer to relevant guidance in BS 7533




200 x 100mm



300 x 200mm



300 x 300mm



600 x 300mm

Sizes



80mm

Depths



Hydropave Fusion



Specification

 **PrimeTop®**  **Ef-Stop®**

Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003 200x100x80mm 300x200x80mm 300x300x80mm BS EN 1339:2003 600x300x80mm
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kg/m ³ cement
Surface Finish	Textured Granite Aggregate
Granite Content in Surface Layer (Not less than %)	53% Silver, Graphite, Mid Grey 45% Sandstone 8% Blanc 3% Noir
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Frost Protection	Yes
Drainage Void Width	5.5% to accommodate correct grit grading, reduce maintenance and maximise drainage flow rate
Strength	BS EN 1338:2003 Typical tensile splitting strength of >3.6MPa BS EN 1339:2003 Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid risk	Extremely Low
Installed to	BS 7533-3:2005 Plus Q24 115 Create 45-20-64/400 Plus Q24 117 Create 45-20-64/400 Plus Q24 119 Create 45-20-64/400
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 6%
Carbon Footprint	34kgCo ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	B , according to the Green Guide to Specification, 4 th Edition 2009. A , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Hydropave Fusion




Stock

product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Hydropave Fusion	200 x 100 x 80	Graphite, Mid Grey, Silver	YES	9.6	1.6	50	480	1739	1729
	300 x 200 x 80	Blanc, Graphite, Mid Grey, Noir, Sandstone, Silver	SO	9.6	2.4	16.66	160	1756	1746
	300 x 300 x 80	Graphite, Mid Grey, Sandstone, Silver	SO	10.8	2.7	11.11	120	1973	1963
	600 x 300 x 80	Graphite, Mid Grey, Sandstone, Silver	SO	10.8	5.4	5.55	60	1973	1963


Blanc




Silver

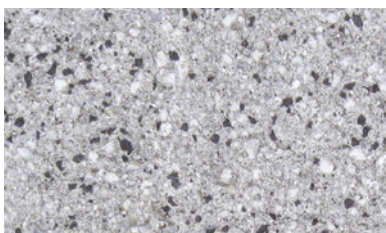

Mid Grey

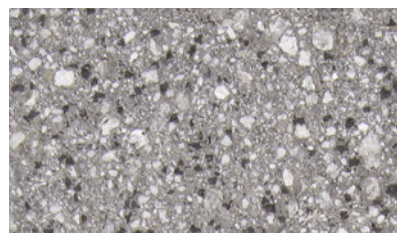


Graphite

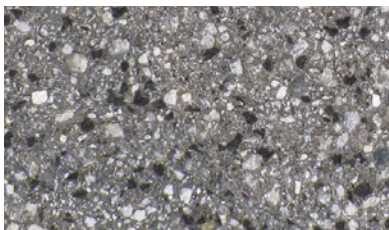

Noir



Sandstone

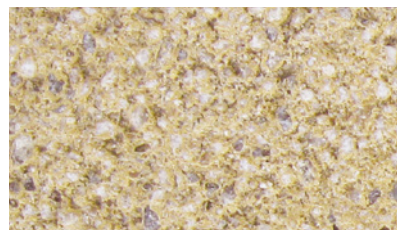

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

[tobermore.co.uk](https://www.tobermore.co.uk)