


# Hydropave Shannon

Permeable paving with smooth surface.

Hydropave Shannon is a stylish permeable block paving product. Its smooth, contemporary look and wide range of vibrant colours allow for design flexibility.

- Functions as a SuDS paving system
- Superb hard-wearing smooth surface
- Vibrant long-lasting colours



**Duo Sizes**

Both sizes in one pack



60mm

**Depths**

 PrimeTop®

 Ef-Stop®



Finish



Pedestrian Use



Light Traffic



Commercial Traffic



BIM Level 2

Refer to relevant guidance in BS 7533



# Hydropave Shannon



## Specification

 **PrimeTop**  **Ef-Stop**

<b>Product type</b>	Concrete Paving Block
<b>Manufactured to</b>	BS EN 1338:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Surface Finish</b>	Smooth
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Frost Protection</b>	Yes
<b>Drainage Void Width</b>	5% to accommodate correct grit grading, reduce maintenance and maximise drainage flow rate
<b>Strength</b>	Typical tensile splitting strength of >3.6MPa
<b>Slip/Skid risk</b>	Extremely Low
<b>Installed to</b>	BS 7533-3:2005 <b>Plus</b> Q24 115 <b>Create</b> 45-20-64/400 <b>Plus</b> Q24 117 <b>Create</b> 45-20-64/400 <b>Plus</b> Q24 119 <b>Create</b> 45-20-64/400
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 12%
<b>Carbon Footprint</b>	22kgCo <sup>2</sup> e/m <sup>2</sup>
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breem rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

### Email

[technical@tobermore.co.uk](mailto:technical@tobermore.co.uk)  
[sales@tobermore.co.uk](mailto:sales@tobermore.co.uk)

[tobermore.co.uk](http://tobermore.co.uk)

# Hydropave Shannon



## Stock


product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Hydropave Shannon Duo</b> (both sizes in one pack) BIM	208 x 173 x 60 173 x 173 x 60	Bracken, Charcoal, Heather	YES	12.87	0.99	30	195 195	1764	1754

**BIM** - This product is available to download from our website in BIM Level 2 format.


### Bracken



### Heather

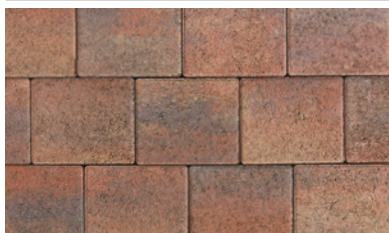

### Charcoal

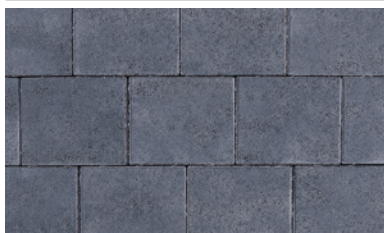

\*Swatches are for colour reference only.

## Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

## Email

technical@tobermore.co.uk  
sales@tobermore.co.uk