

Hydropave Tegula

Permeable paving with
traditional styling.

Manufactured to create an aged appearance, Hydropave Tegula permeable block paving is ideal for traditional projects. Available in one solid and four multi-tone colours.

- Functions as a SuDS paving system
- Processed to give an aged, antique appearance
- Vibrant long-lasting colours
- Suitable for both modern or traditional projects

**TGA**

Textured
Granite Aggregate

Finish



Pedestrian
Use



Light
Traffic



Commercial
Traffic



BIM
Level 2

Refer to relevant guidance in BS 7533



240 x 120mm

Single Size

173 x 173mm



208 x 173mm

Duo Sizes

Both sizes in one pack



60mm
80mm

Depths

Hydropave Tegula



Specification



Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003
Surface Finish	Processed to give an aged appearance
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Frost Protection	Yes
Drainage Void Width	60mm 5% to accommodate correct grit grading, reduce maintenance and maximise drainage flow rate 80mm 6% to accommodate correct grit grading, reduce maintenance and maximise drainage flow rate
Strength	Typical tensile splitting strength of >3.6MPa
Slip/Skid risk	Extremely Low
Installed to	BS 7533-3:2005
	Plus Q24 115 Create 45-20-64/400 Plus Q24 117 Create 45-20-64/400 Plus Q24 119 Create 45-20-64/400
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12% (all colours except Slate)
Carbon Footprint	60mm 24kgCO ₂ e/m ² 80mm 32kgCO ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	60mm: A according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base. 80mm: B , according to the Green Guide to Specification, 4 th Edition 2009. A , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Hydropave Tegula




Stock

product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Hydropave Tegula 240 BIM	240 x 120 x 80	Bracken, Charcoal, Slate	YES	10.08	2.02	34.72	350	1781	1771
Hydropave Tegula Duo (both sizes in one pack) BIM	208 x 173 x 60 173 x 173 x 60	Bracken, Cedar, Charcoal, Heather, Slate	YES	12.87	0.99	30	195 195	1721	1711

BIM - This product is available to download from our website in BIM Level 2 format.

Bracken

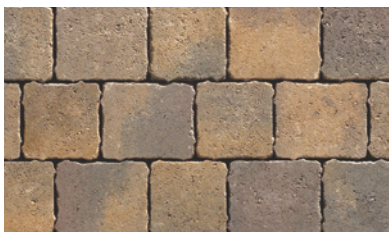

Heather



Cedar*



Slate*



Charcoal*



*Swatches are for colour reference only.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk