







Fusion


Modular granite aggregate paving.

Fusion's granite appearance creates a striking, contemporary look. An extensive range of colours allows for the creation of unique paving patterns and designs.

- Vibrant, granite appearance
- Manufactured with sparkling natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Significantly reduced efflorescence
- Creates a striking, contemporary look

 **PrimeTop**  **Ef-Stop**

<p>TGA Textured Granite Aggregate</p> <p>Finish</p>	<p> Permeable</p>	<p> AirClean</p> <p>Also available as</p>	<p> Pedestrian Use</p>	<p> Light Traffic</p>	<p> Commercial Traffic</p>	<p> BIM Level 2</p>
			Refer to relevant guidance in BS 7533			




100 x 100mm



200 x 100mm




200 x 200mm



300 x 200mm



300 x 300mm



600 x 300mm

Sizes




60mm
80mm

Depths


Fusion




Blanc

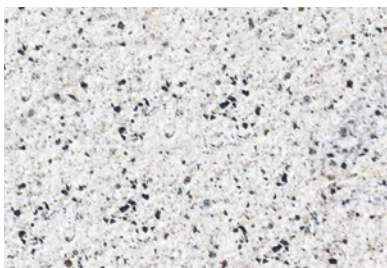


Silver

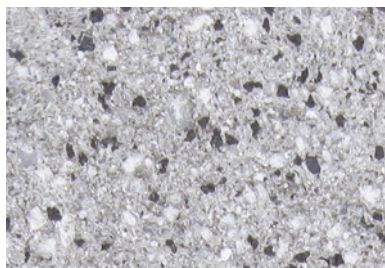

Mid Grey

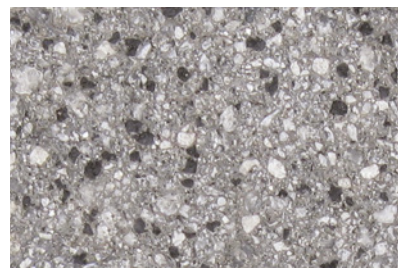

Graphite

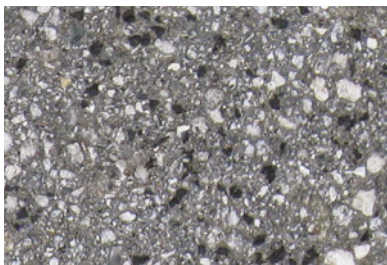

Noir



Sandstone



IMPORTANT INFORMATION

Tobermore recommend that you separate product groups using contrasting bands of colour as each product is manufactured separately and may have slight variations in colour.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

Fusion



Specification

 **PrimeTop®**
 **Ef-Stop®**

Product type	Concrete Paving Block		
Manufactured to	BS EN 1338:2003	100x100x60mm 200x100x60mm 200x200x60mm 100x100x80mm	200x100x80mm 200x200x80mm 300x200x80mm 300x300x80mm
	BS EN 1339:2003	300x200x60mm 300x300x60mm	600x300x60mm 600x300x80mm
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement		
Surface Finish	Textured Granite Aggregate		
Granite Content in Surface Layer (Not less than %)	53% 45% 8% 3%	Graphite, Mid Grey, Silver Sandstone Blanc Noir	
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence		
Strength	BS EN 1338:2003	Typical tensile splitting strength of >3.6MPa	
	BS EN 1339:2003	Typical tensile splitting strength of >5MPa (Class 3)	
Slip/Skid risk	Extremely Low		
Installed to	BS 7533-3:2005	100x100x60mm 200x100x60mm 200x200x60mm 100x100x80mm	200x100x80mm 200x200x80mm 300x200x80mm 300x300x80mm
	BS 7533-4:2006	300x200x60mm 300x300x60mm	600x300x60mm 600x300x80mm
NSI	Plus Q24 110 Create 45-20-64/400	100x100x60mm 200x100x60mm 200x200x60mm 100x100x80mm	200x100x80mm 200x200x80mm 300x200x80mm 300x300x80mm
	Plus Q25 315 Create 45-20-64/395	300x200x60mm 300x300x60mm	600x300x60mm 600x300x80mm
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com		
Energy used	100% renewable energy		
Water used	100% water used from rainwater harvesting system and groundwater bore hole		
Recycled content	Not less than 6%		
Carbon Footprint	60mm 80mm	26kgCo ² e/m ² 34kgCo ² e/m ²	
Recyclable	100% of this product can be recycled		
Manufacturing & Delivery	From one location within the UK		
breem rating www.bre.co.uk	60mm: A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved when used in conjunction with a prepared recycled sub-base. 80mm: B , according to the Green Guide to Specification, 4 th Edition 2009. A , can be achieved when used in conjunction with a prepared recycled sub-base.		

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Fusion



Stock

product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Fusion 60mm BIM	100 x 100 x 60	Graphite, Silver, Mid Grey	YES	11.52	0.96	100	1152	1630	1620
		Sandstone	MTO						
	200 x 100 x 60	Graphite, Silver, Mid Grey	YES	13.44	2.24	50	672	1810	1800
		Sandstone	MTO						
	200 x 200 x 60	Graphite, Silver, Mid Grey	YES	12.48	2.08	25	312	1765	1755
		Sandstone	MTO						
	300 x 200 x 60	Graphite, Silver, Mid Grey	YES	12.48	3.12	16.66	208	1765	1755
		Sandstone	MTO						
		Blanc, Noir	SO						
	300 x 300 x 60	Graphite, Silver, Mid Grey	YES	9.36	2.34	11.11	104	1325	1315
Sandstone		MTO							
600 x 300 x 60	Graphite, Silver, Mid Grey	YES	9.36	4.68	5.55	52	1325	1315	
	Sandstone	MTO							
Fusion 80mm BIM	100 x 100 x 80	Graphite, Silver, Mid Grey	YES	9.6	0.96	100	960	1756	1746
		Sandstone	MTO						
	200 x 100 x 80	Graphite, Silver, Mid Grey	YES	9.6	1.6	50	480	1756	1746
		Sandstone	MTO						
	200 x 200 x 80	Graphite, Silver, Mid Grey	YES	9.6	1.6	25	240	1756	1746
		Sandstone	MTO						
	300 x 200 x 80	Graphite, Silver, Mid Grey	YES	9.6	2.4	16.66	160	1756	1746
		Sandstone	MTO						
		Blanc, Noir	SO						
	300 x 300 x 80	Graphite, Silver, Mid Grey	YES	7.2	1.8	11.11	80	1319	1309
Sandstone		MTO							
600 x 300 x 80	Graphite, Silver, Mid Grey	YES	7.2	3.6	5.55	40	1319	1309	
	Sandstone	MTO							

BIM - This product is available to download from our website in BIM Level 2 format.

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
 sales@tobermore.co.uk

tobermore.co.uk