



Avon Barrier

Avon RB780CR Chieftain Road Blocker



Avon RB780CR Chieftain High Security Road Blocker provides a high level of security against unauthorised vehicle access.

Designed to withstand direct impact forces in excess of 1,852 KJ, the RB780CR road blocker is a Hostile Vehicle Mitigation (HVM) solution providing protection to sites from extreme Vehicle Borne Improvised Explosive Device (VBIED) attack.

It has been independently, structurally evaluated by the Transport Research Laboratory (TRL) and has also been physically tested in a number of full scale impact tests conducted in accordance with PAS 68 by the Motor Industry Research Association (MIRA).

Developed and manufactured by engineers with significant experience in the fields of high security and access control, it is a highly dependable security product that will easily interface with a wide range of control equipment.

Assembled in our fabrication facilities using heavy gauge materials to give maximum strength and durability, the RB780CR Chieftain Road Blocker is an ideal product to protect high security establishments, iconic buildings and critical infrastructure.

Features

- Multiple testing (5 different / independent physical tests)
- Independently structurally evaluated
- Physically impact tested to PAS 68 criteria
- Manufactured from heavy gauge materials
- Manual hand pump facility
- Programmable logic control system
- 100% duty cycling
- Fully clad base


Benefits

- Comprehensive understanding of attack resistance
- Protection from multi-direction impact approach
- Confidence in proven performance
- Strength and durability
- Operational under power failure conditions
- Flexibility to interface with all forms of access control
- Reliable and dependable
- Simple to install

Hostile Vehicle Mitigation

sales@avon-barrier.co.uk
Tel: +44 (0) 117 953 5252

Technical Specification RB780CR Chieftain Blocker

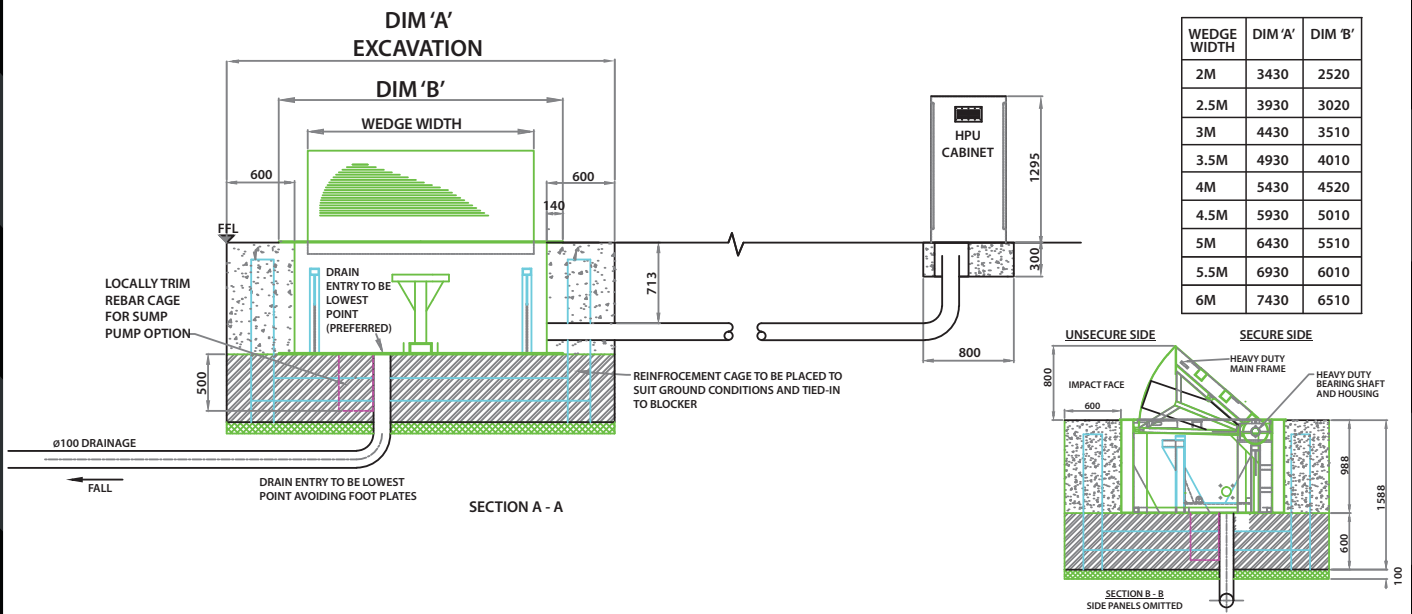

The road blocker comes with a push-button control as standard, however it can be customised to interface with a wide range of access control equipment to suit specific customer requirements (available as options) and any configuration including (but not limited to) inductive loop systems, card readers, communication equipment and manned guard emergency systems can be accommodated.



Technical Details

Physical Dimensions:	HPU Cabinet - 640/940mm W x 670mm D x 1300mm H Blocker widths available 2-6 metres in 500mm increments	2m Road Blocker - 2510mm W x 1770mm D x 1000mm H
Basic Power Requirements:	3-Phase 415V AC, 50Hz, (other voltages are available)	
Control Voltage:	S.E.L.V 24v	
Performance:	Loading 30 Tonnes	
Impact Absorption:	1852KJ (fully operational immediately after impact)	
Full PAS68 Classification:	V/7500(N2)/80/90:0/17	
Tested Model:	800mmHx2.0mW	
Speed of Operation:	6 Seconds to raise or lower (other speeds available)	
Emergency Fast Raise:	<1 seconds to raise (option)	
Operating temperature range available:	-25°C - +70°C	
Construction:	The supporting framework is constructed from fully welded, heavy gauge, high strength, structural steels completely encased with steel sheets to provide a self-shuttered module. Sub-surface fixing points ensure the blocker is completely secured to its foundation.	

Options Available

Where the blockers control point is remote from the installation, we strongly recommend the fitting of a recordable CCTV system, traffic lights and inductive loop systems.

For safety reasons pedestrians, cyclists and motorcycles are advised not to use a blocker controlled roadway, additional safety measures can be incorporated into the blocker system if required.

- Emergency fast raise system
- Access and intercom systems
- Inductive loop systems
- Emergency buttons with lock down
- UPS backup for the electrical system
- Traffic lights and back-indications systems
- Accumulator systems for hydraulic operation in power failure conditions
- Interlocking systems to give air-lock type protection on sites with higher threat levels
- Integral inset warning lights in blocking segment



Avon Barrier Corporation Ltd
149 South Liberty Lane
Ashton Vale Trading Estate
Bristol BS3 2TL
United Kingdom

Tel +44 (0) 117 953 5252
Fax +44 (0) 117 953 5373
Email sales@avon-barrier.co.uk
www.avon-barrier.co.uk

Avon Barrier reserve the right to change or amend the specification of its products from time to time in furtherance of its policy of continued improvements.

Ref Avon RB780CR Chieftain Road Blocker version 2.7_14

