



**TRUCKPAVE™ cellular  
porous pavers**

 T: +44 (0)1621 874200  
 F: +44 (0)1621 874299

**Product Data Sheet**

Issue: 01 Date: 27.07.12

Characteristics	TRUCKPAVE 80 <sup>[1&amp;2]</sup>	TRUCKPAVE 100 <sup>[3&amp;4]</sup>
Load-bearing capacity	Category SLW60. Vehicles up to 60t gross weight	
Textured anti-skid surface	Available option	
Connection type	Integral tongue & groove <sup>[2]</sup>	Butt jointed (no connection)
Dimensions	80mm x 400mm x 600mm	100mm x 400mm x 600mm
Cell wall thickness	40mm nominal	
Nominal internal cell dimensions	100mm x 100mm square	
% open cell	55	
Quantity per m <sup>2</sup>	4.17 pavers	
Quantity [m <sup>2</sup> ] per pallet	80 [19.18]	60 [14.39]
Nominal weight (kg) [kg/m <sup>2</sup> ]	9 [37.53]	12 [50.04]
Polymer	Recycled polyethylene	
Colour	Grey (other colours available, subject to quantity)	
Chemical resistance	Excellent	
UV resistance	High	
Toxicity	Non toxic	

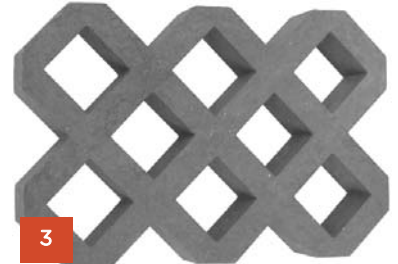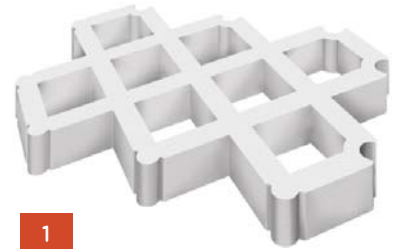

As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or a Fiberweb Group company, many of which are registered in a number of countries around the world.