


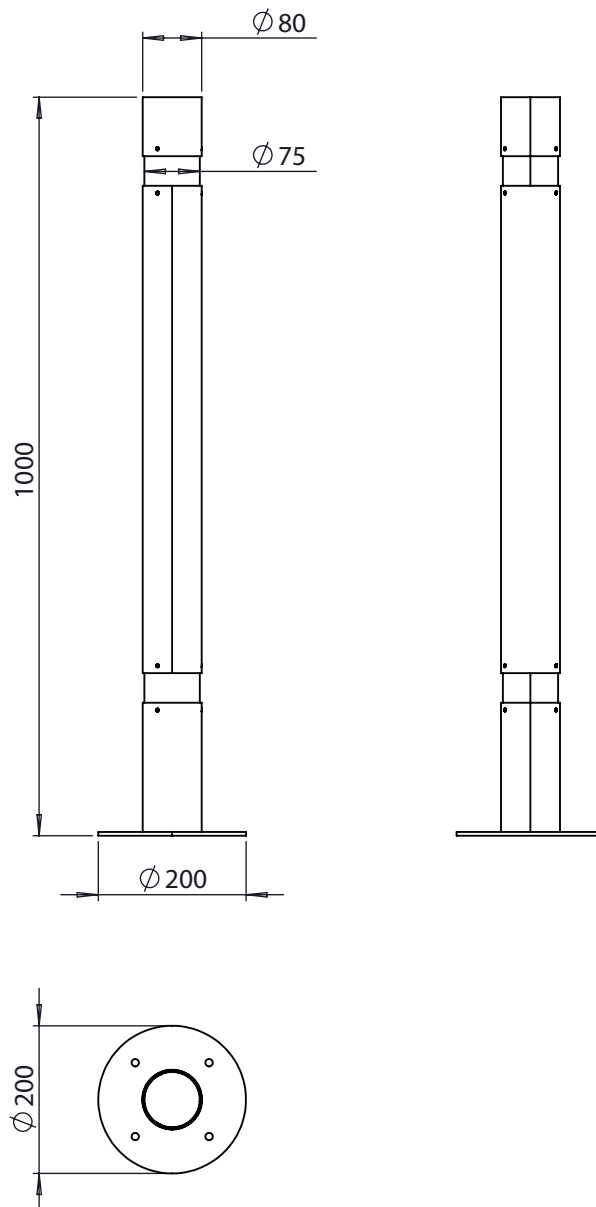

**Max Dimensions:**

Height: 1000 mm | Diameter tube: 80 mm | Diameter base: 200 mm

Underground (on request): 250 mm | Weight: 6 kg

**Description:**

The bollard ONE is made in the middle, lower and upper part in tubular steel, 80 mm diam. and 1,5 mm thickness, whereas the two sections of H. 40 mm are made in tubular stainless steel AISI 316 of 76 mm diam. and 2 mm thickness. The tubes of different diameters are fixed together with a mechanical system through specific screws M5. A flange, with 4 holes M10 for the fixing to the ground through specific bolts (not provided), is welded to the base of the bollard. The version for the fixing through cementation is provided with an under flange extension of 250 mm and the flange comes with no holes.

For the realization of this product, Steel EN10111DD11 is used and later treated with a cycle of sandblasting, cataphoresis and powder coating. Such cycle is meant to guarantee the protection of the painted products, in an environment of C4 corrosion class, as requested by the UNI regulations EN ISO 12944-2. The products are eventually polyester-powder coated with RAL colours at choice.

*Optional: extension for cementation*