

ϵ

Code: RIB01, RIB11, RIB12, RIB13, RIB21, RIB23

Materials: The UHPC beams (fibregrass reinforced concrete), 2.38 m long with a section of approximately 6 x 27 cm, are masscoloured in earth, white or grey tones, with a waterproof exposed aggregate finish. Various finishes and colours are possible, depending on the quantity ordered.

The support structures come in three types (high, low or mixed) and are made in AG3 cast aluminium with an anodized finish.

Finishes:





Ground/Earth Grey

(Other finishes available on request)

Dimensions (cm):

RIB01 > 20 x 12 x 5

RIB11 > 48 x 17 x 47

RIB12 > $48 \times 17 \times 77$

RIB13 > $48 \times 17 \times 77$

RIB21 > 250 x 50 x 40

RIB23 > 250 x 50 x 40

Weight (Kg):

RIB01 > 0,65

RIB11 > 4,50

RIB12 > 5,90

RIB13 > 5,20


RIB21 > 100 RIB23 > 100


Instalation: The concrete blocks are attached by stainless steel screws to the aluminium supports.

Several options of installation and levelling plates allow you to choose the best solution to place the bench freestanding or fixed with stud anchors secured in holes drilled into the paving and filled with epoxy resin, quick-setting cement or similar. The bench is delivered dismantled with assembly instructions. The screws and stud anchor are delivered with the supports.


Maintenance: Because of the properties of the material, no functional maintenance is required. (For further information about this product, visit the website urbidermis.com)

Applicable standards: UNE-EN 13369, UNE-EN 13198, UNE-EN 13369, UNE-EN 12390-3, UNE-EN 12504-1, UNE 41510 / UNE-EN ISO 9227 / EN ISO 7599

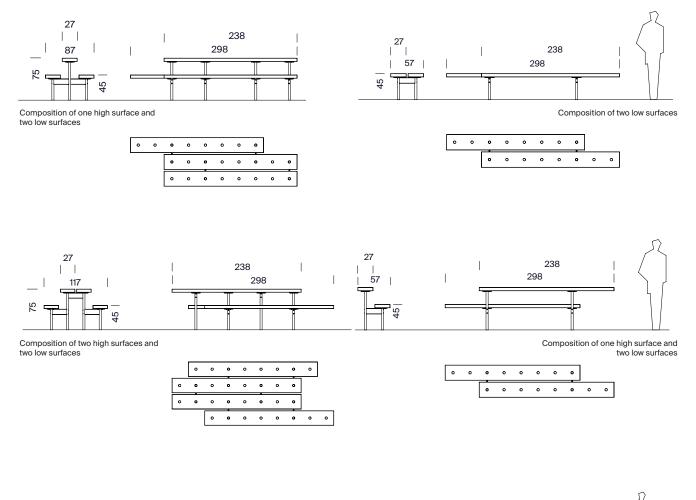



Customised composition



Size in cm