

1. Application


SPORTEC® UNI versa is a durable flooring suitable for various types of applications. It is the ideal surface for multipurpose sports areas due to its high resilience and excellent durability against mechanical impact. **SPORTEC® UNI versa** for sports applications can be used with or without elastic underlay. In case of high shock absorbance required **SPORTEC® standard** can be used as elastic underlay. The combination of **SPORTEC® UNI versa** and **SPORTEC® standard** is offered as **SPORTEC® UNI versa sandwich**.

2. Material

Coarse-grained coloured EPDM granules bonded with polyurethane elastomer.

3. Product Design

Colours:

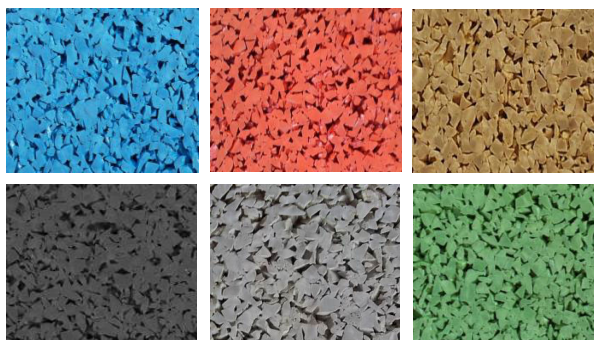

blue, red, beige, dark grey, light grey, green
(other colours on request)

low colour differences are conditional of material

Surface:

coarse granule structure with 100% coloured EPDM-granules

4. Dimensions / Tolerances

Width:	1,250 mm (± 1.5%)
Thickness:	4mm (± 0.3mm)*
Volumetric weight:	Approx. 1,095kg/m ³
Roll length (± 1.5 %):	30m at 4mm*
Area weight:	Approx. 4.4kg/m ² (at 4mm)

(*other thicknesses and lengths on request)



5. Product Testing

Fire resistance:	Cfl-s1 (B1)	(DIN EN 13501-1)
Tensile strength:	Min. 0.3N/mm ²	(EN ISO 1798)
Elongation at break:	Min. 40%	(EN ISO 1798)
Hardness:	60 ± 5 Shore A	(DIN 53505)
Temperature range:	-30°C to 80°C	(internal test)
Coefficient of friction:	0.75 μ (DS)	(EN 13893)
Anti-slip property:	R 10	(DIN 51130)
Anti-slip properties:	C (wet-loaded barefoot areas)	(DIN 51097)
Compression set:	Approx. 15%	(internal test)
Light fastness:	4 (grey scale)	(DIN EN 105-B02:2002)
ITF speed class test:	Slow (1)	(according to ITF CS 01/02)
Ball rebound:	100%	(EN 14877)



TVS UNI VERSA
Product Data Sheet PDS 1.1 TVS UNI VERSA
Revision: 1.1
Issued: 01/02/2017