


selux



E L O

LOOKBOOK



PURITY OF LIGHT
AND FORM



Elo family

The Elo family is a holistic system for pure light around buildings. The consistently reduced, cylindrical shape is characterised by clarity of design and a timeless elegance, enabling the Elo to blend harmoniously into the widest variety of backgrounds and architectural settings.



Elo pole top luminaire

- up to 5400 lm
- for 60 or 76 mm pole top



Elo pole top luminaire

- up to 5400 lm
- for 60 or 76 mm pole top



Elo light column and bollard

- Light column
up to 5400 lm
2000, 3000, 4000 mm
- Bollard
up to 1500 lm
800, 1000, 1200 mm




Elo wall luminaire

— up to 1500 lm



Visual comfort with a high level of aesthetics

The integrated Tritec optic combines the purest light quality with a distinctive visual aesthetic that creates intensive highlights. Coordinated to lighting requirements, a Tritec optic can consist of several stacked modules.

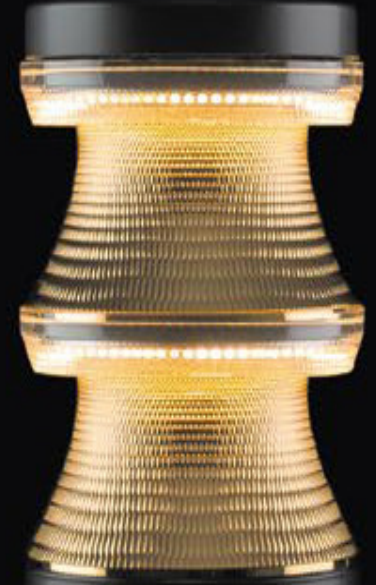

Symmetrical and asymmetrical light

Reserved yet with a striking look by day or by night, the Elo can provide uniform lighting from comparatively low heights.

The balanced, softly emitted light is distributed either on all sides or in forward direction to provide safety and guidance, like an elegant signpost.




Light colour

2700 K

3000 K


4000 K

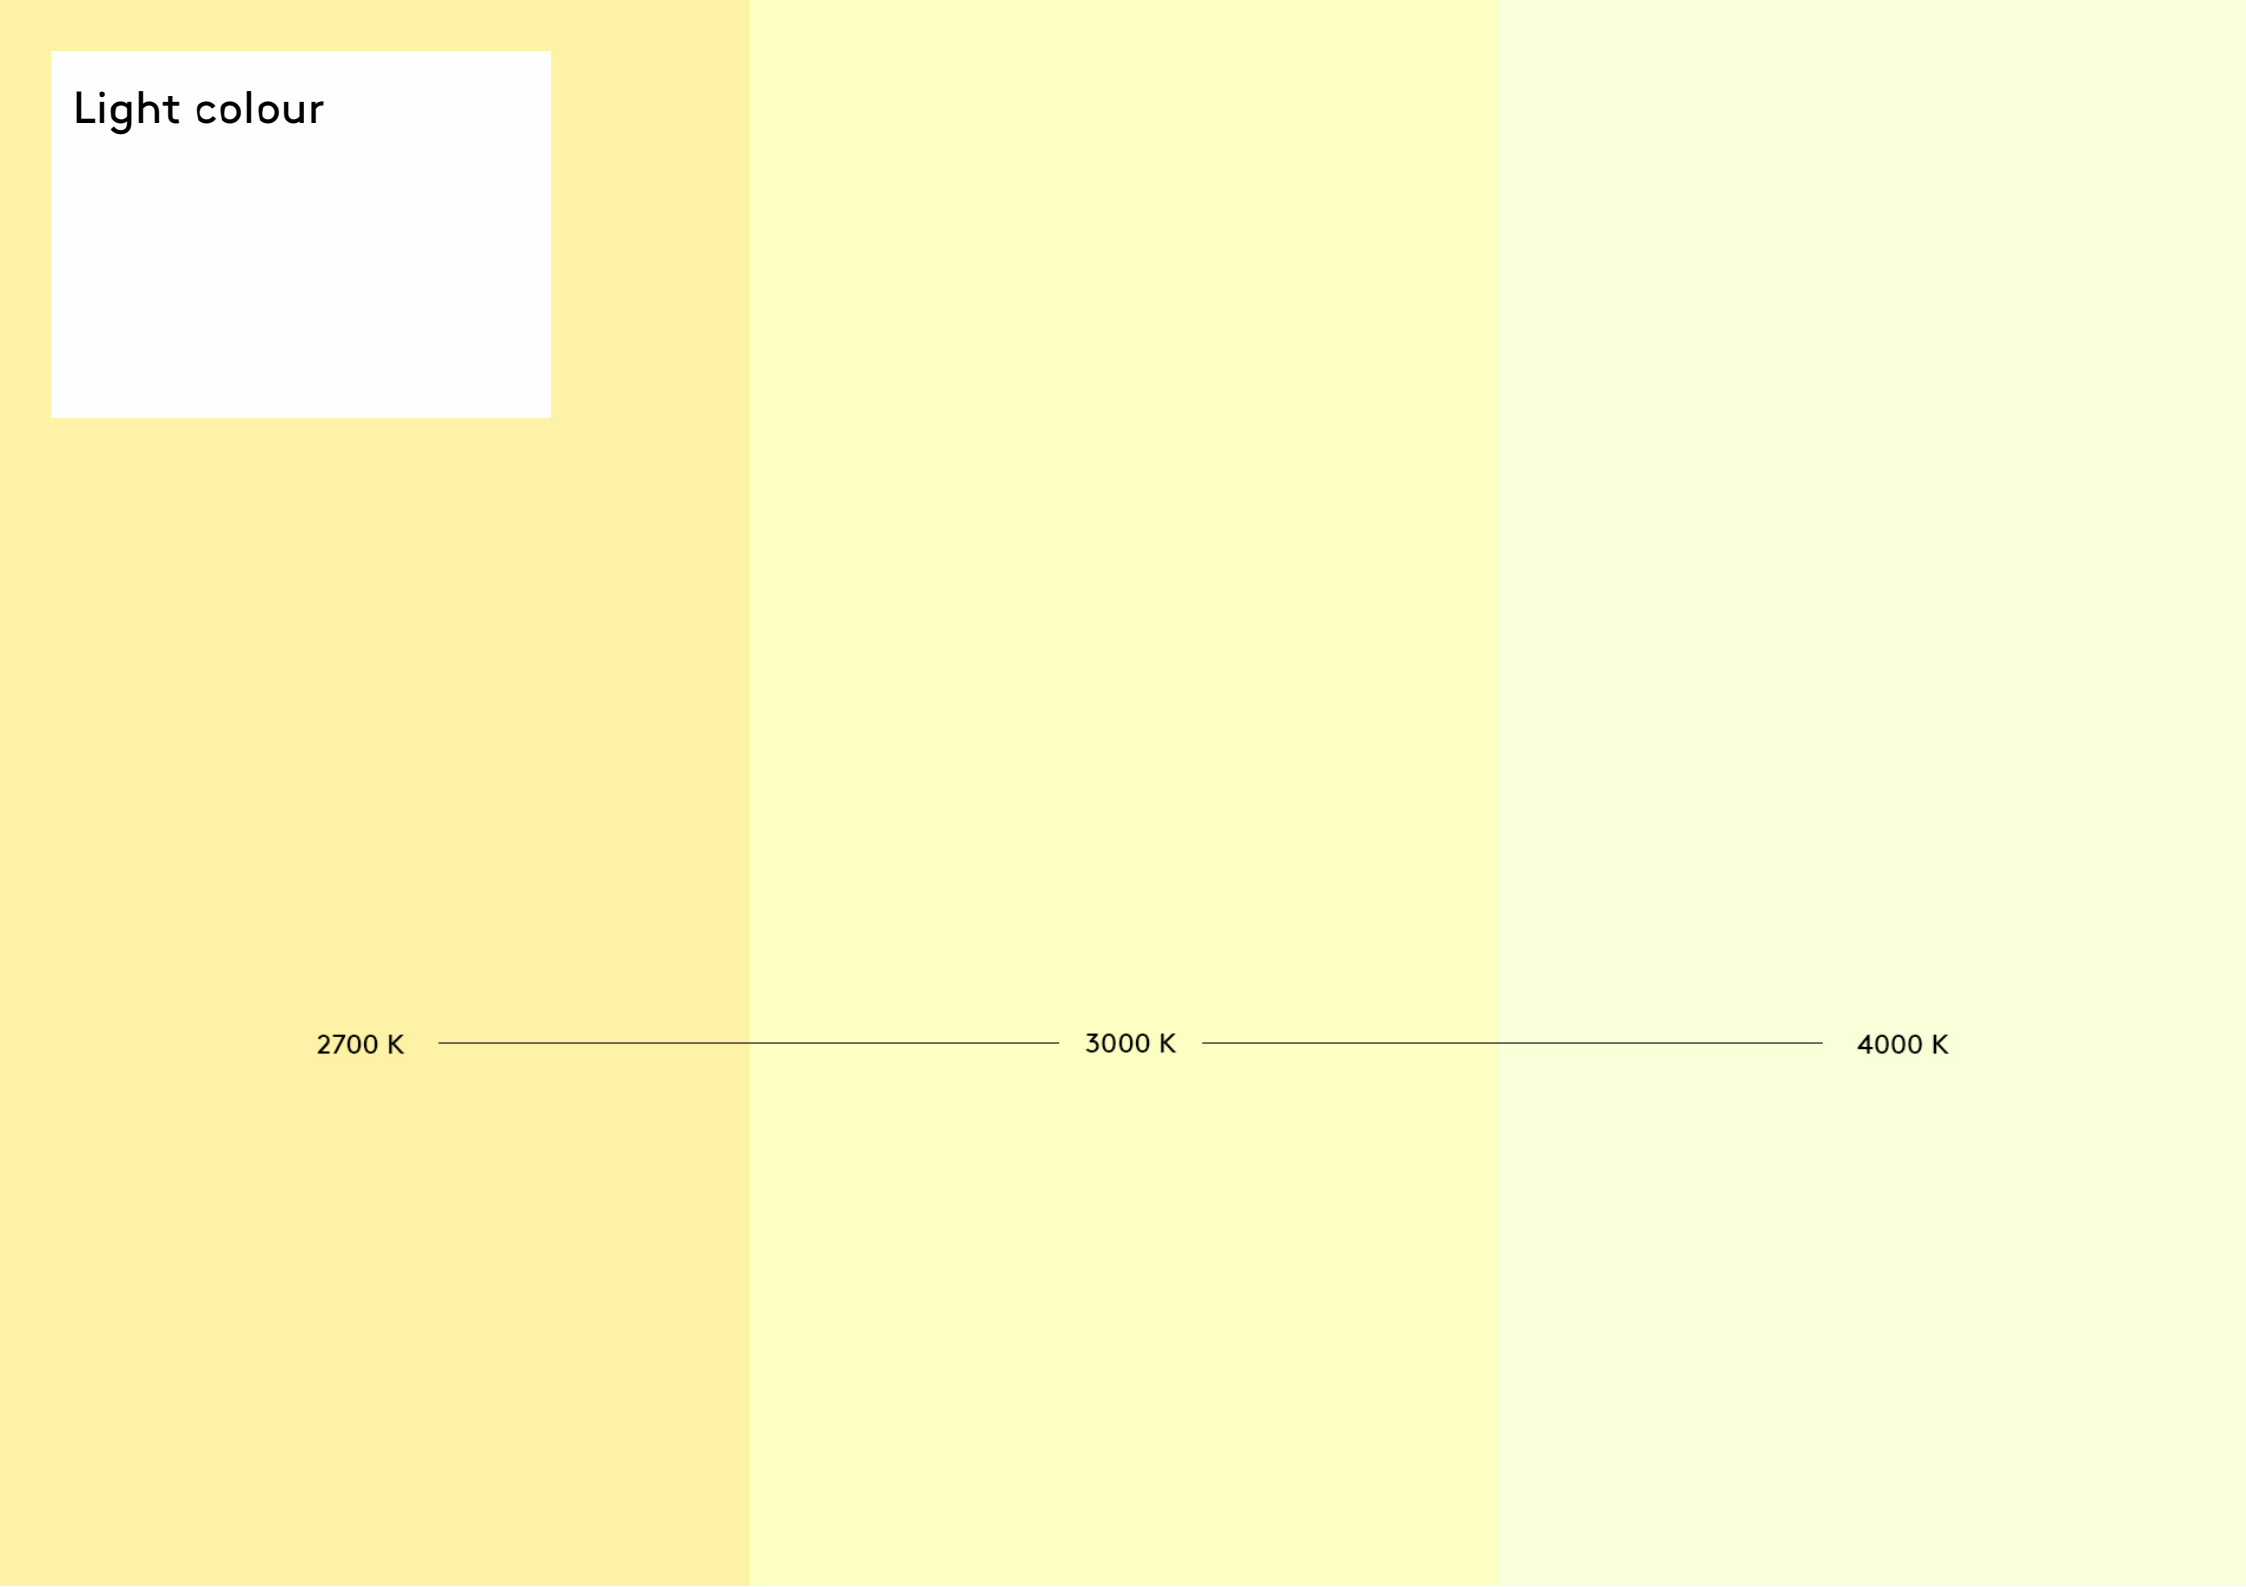


Save energy costs with professional control

Elo luminaires can be switched and dimmed using the DALI interface. Through the use of intelligent control, light is individually adjusted as required.


CLT – Constant Lumen Technology

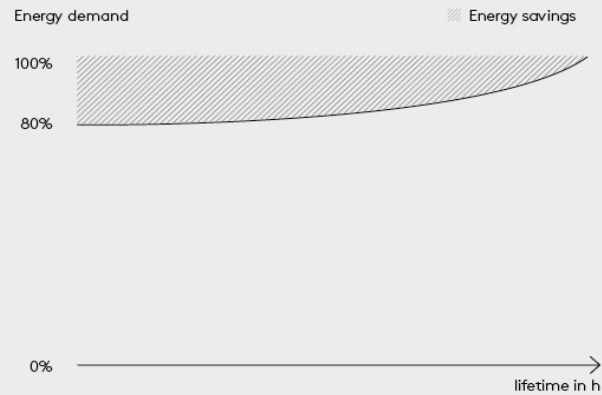

AMP Dim

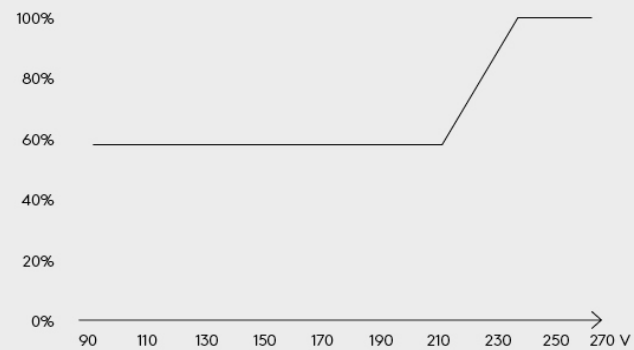

- Fixed setting
- - - Phase controlled night-time switching
- ⋯ Dynamic

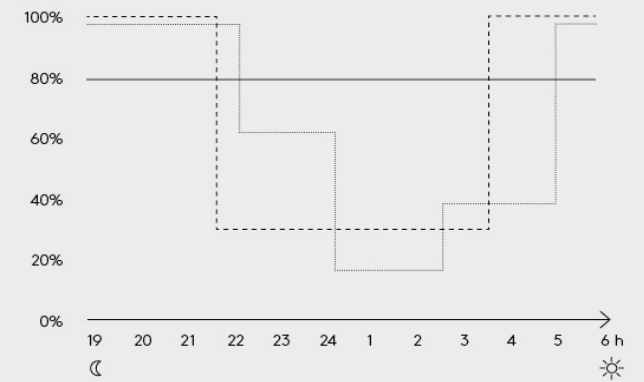

Technical
information



Technical information

- up to 107 lm/W
- 2,700K, 3,000K or 4,000K
- CRI ≥ 80
- aluminium die-cast housing, PC moulded cylinder
- replaceable light unit
- galvanised steel column
- optionally with or without door (bollard)
- with incorporated buried base or base plate (light stack)
- Selux Graphite or special finish
- DALI interface
- Fix dimmer control, HNS, Dynadimmer, CLT, AmpDim
- IP65, IK10, CE, safety class II optional class I

Selux quality

As well as high-quality construction, Selux only ever uses highly durable, premium quality materials.



Service and warranty

Every LED luminaire that leaves our company is examined with regard to light colour, luminous flux and power. The data is stored to enable light components to be supplied at a later date that have the same technical parameters as the initial equipment.

5 year warranty on project registration at selux.com.

