

Vertical Ladder



FIXED VERTICAL LADDER - With Safety Cage TO BS 4211:2005

SPECIFICATIONS - Aluminium

Ladder: Alloy Class 1 Stiles 87mm x 27mm box section.
Class 1 22mm dia heavy duty serrated rung.
Stand off brackets from 50mm x 10mm alloy rectangular bar.
Fixings in stainless steel A4 grade.

Ladder width: 454mm

Finish: All alloy mill finish

Safety Cage: Distance to lowest hoop between 2.2m and 3m.

Strap: 50mm x 10mm alloy rectangular bar

Fixings: Dome head bolts.

Finish: All alloy mill finish

Options: Ladder up safety post

ALUMINIUM VERTICAL LADDER WITH SAFETY CAGE

Type	Size	Approx Weights (kg)
BL-A-WH1	2.0 - 2.8m	15-18
BL-A-WH2	Above 2.8 - 3.6m	18-20
BL-A-WH3	Above 3.6 - 4.4m	20-26
BL-A-WH4	Above 4.4 - 5.2m	26-32
BL-A-WH5	Above 5.2 - 6.0m	32-37
BL-A-WHSS	Special sizes available on request	

SPECIFICATIONS - Mild Steel

Ladder: Mild Steel
Stand off brackets from 50mm x 10mm bar

Stiles: 50mm x 10mm flat bar

Rung: 20mm solid round bar

Ladder width: 454mm

Finish: Galvanised

Safety Cage: Distance to lowest hoop between 2.2m and 3m.


Strap: 50mm x 10mm rectangular bar

Finish: Galvanised

Options: Ladder up safety post

MILD STEEL VERTICAL LADDER WITH SAFETY CAGE

Type	Size	Approx Weights (kg)
BL-S-WH1	2.0 - 2.8m	45-53
BL-S-WH2	Above 2.8 - 3.6m	53-60
BL-S-WH3	Above 3.6 - 4.4m	60-77
BL-S-WH4	Above 4.4 - 5.2m	77-94
BL-S-WH5	Above 5.2 - 6.0m	94-111
BL-S-WHSS	Special sizes available on request	

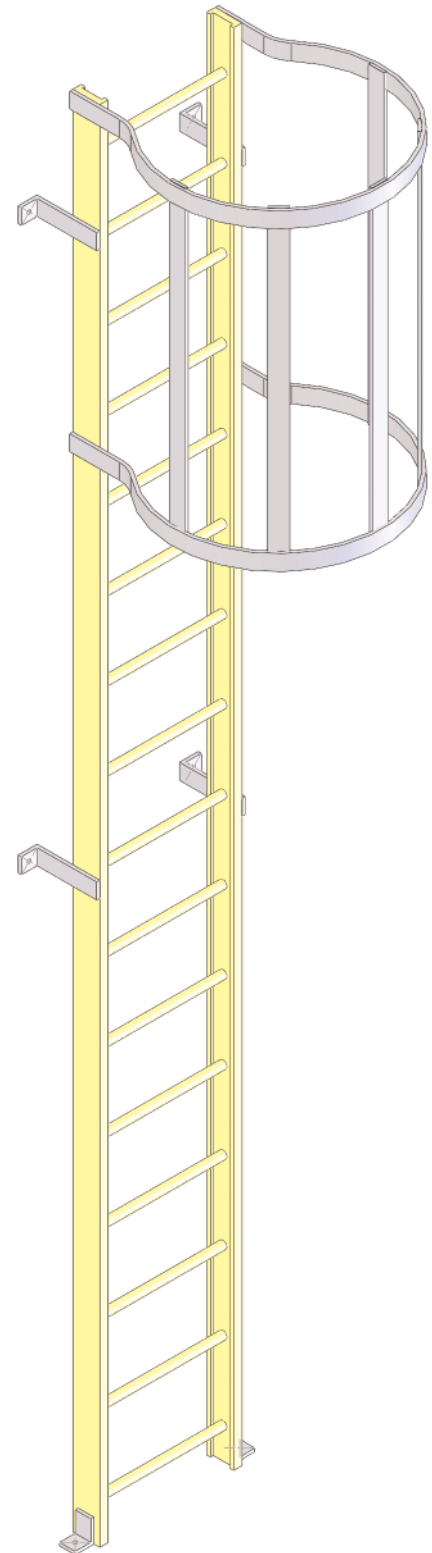

Bilco products are designed and fabricated to consistently high quality standards to ensure complete customer satisfaction.



THE WORLDWIDE SOURCE FOR
SPECIALITY ACCESS PRODUCTS

Tel: 01284 701696 Fax: 01284 702531
Email: bilcouk@bilco.com www.bilco.uk

