

Vertical Ladder



FIXED VERTICAL LADDER - With Safety Cage and Guardrail TO BS 4211:2005

SPECIFICATIONS - Aluminium

Ladder: Alloy Class 1 Stiles 87mm x 27mm box section.
Class 1 22mm dia heavy duty serrated rung.
Stand off brackets from 50mm x 10mm alloy rectangular bar.
Fixings in stainless steel A4 grade.

Ladder width: 454mm

Finish: All alloy mill finish

Safety Cage: Distance to lowest hoop between 2.2m and 3m.

Strap: 50mm x 10mm alloy rectangular bar

Fixings: Dome head bolts.

Finish: All alloy mill finish

ALUMINIUM VERTICAL LADDER WITH SAFETY CAGE AND GUARDRAIL

Type	Size	Approx Weights (kg)
BL-A-WG1	2.0 - 2.8m	36-38
BL-A-WG2	Above 2.8 - 3.6m	38-40
BL-A-WG3	Above 3.6 - 4.4m	40-46
BL-A-WG4	Above 4.4 - 5.2m	46-51
BL-A-WG5	Above 5.2 - 6.0m	51-57
BL-A-WG-SS	Special sizes available on request	

SPECIFICATIONS - Mild Steel

Ladder: Mild Steel
Stand off brackets from 50mm x 10mm bar

Stiles: 50mm x 10mm flat bar

Rung: 20mm solid round bar

Ladder width: 454mm

Finish: Galvanised


Safety Cage: Distance to lowest hoop between 2.2m and 3m.

Strap: 50mm x 10mm rectangular bar

Finish: Galvanised

MILD STEEL VERTICAL LADDER WITH SAFETY CAGE AND GUARDRAIL

Type	Size	Approx Weights (kg)
BL-S-WG1	2.0 - 2.8m	105-112
BL-S-WG2	Above 2.8 - 3.6m	112-119
BL-S-WG3	Above 3.6 - 4.4m	119-136
BL-S-WG4	Above 4.4 - 5.2m	136-153
BL-S-WG5	Above 5.2 - 6.0m	153-170
BL-S-WGSS	Special sizes available on request	

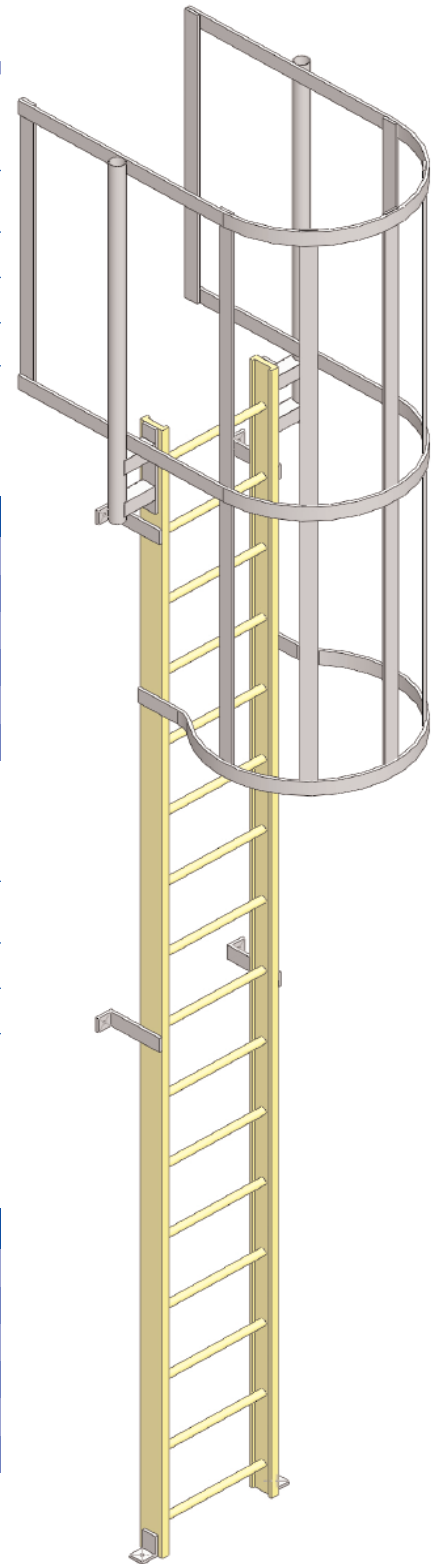

Bilco products are designed and fabricated to consistently high quality standards to ensure complete customer satisfaction.



THE WORLDWIDE SOURCE FOR
SPECIALITY ACCESS PRODUCTS

Tel: 01284 701696 Fax: 01284 702531
Email: bilcouk@bilco.com www.bilco.uk

