

BILCO BWALK-A WALKWAY SYSTEM:

TECHNICAL SPECIFICATION

T&I Solutions Walkway range is designed and manufactured following the recommendations of BS5395: Part 3 This example illustrates our standard specification, our design team can produce bespoke designs to suit most situations

Walkway:



Overall walkway width: 700mm
Walkway width (inside handrails): 600mm
Finish: Mill finish aluminium

GRP Walkway Panels:

GRP panels 1.22 x 0.6m with non-slip glass fibre surface.
Panel mesh size: 30 x 30mm open mesh
Bars: 25 x 2mm bars
Edge: 25 x 2mm on all four sides

Handrails:

Height: 1100mm above surface of decking
Top Rail: 50mm diameter tube
Midrail: Aluminium box section
All internal fixings to be dome
Handrails to be fitted to both sides of walkway
Finish: Mill finish aluminium

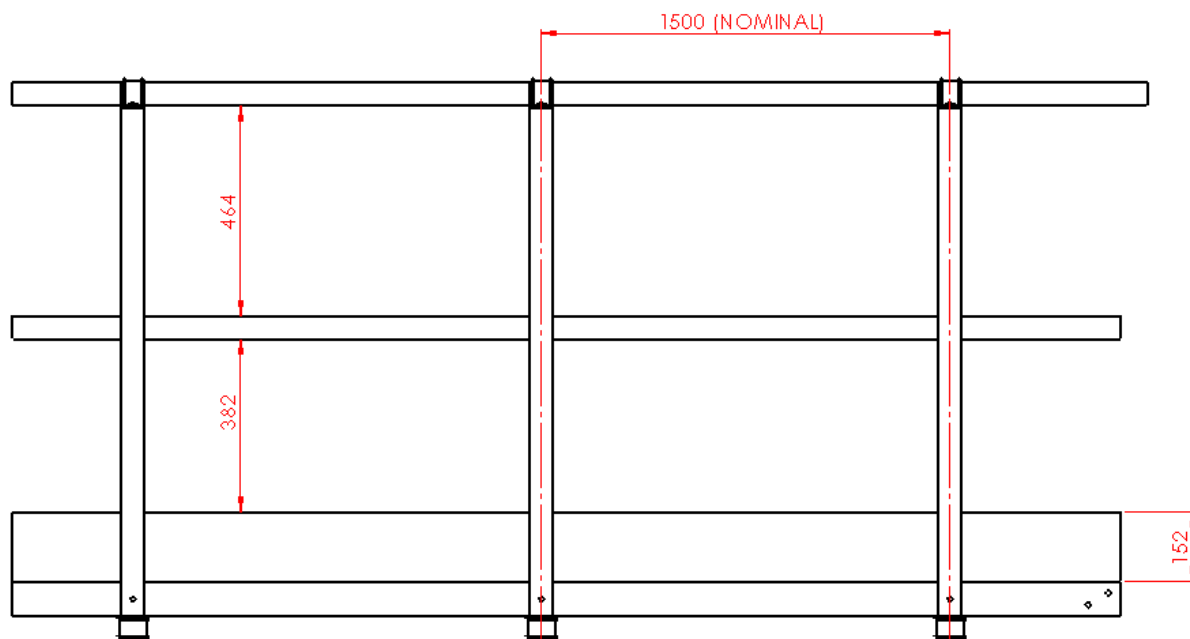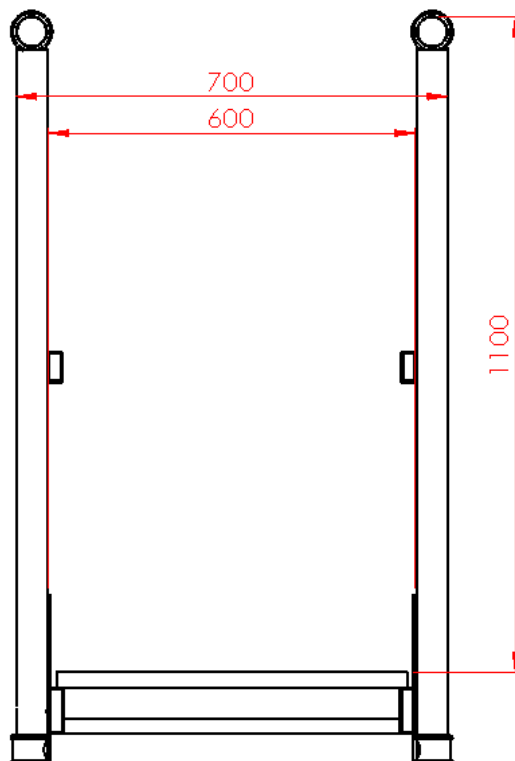

Bilco products are designed and fabricated to consistently high quality standards to ensure complete customer satisfaction.



THE WORLDWIDE SOURCE FOR
SPECIALITY ACCESS PRODUCTS

Tel: 01284 701696 Fax: 01284 702531
Email: bilcouk@bilco.com www.bilcouk.com

