

Witton

Specification

Material

The top and bottom are cast LM6 aluminium giving strength to the fitting and the top canopy an aluminium spinning. The Glazing is polycarbonate or acrylic tube

Ingress Protection

IP 66 Optical Compartment . Gear mounted remote

Finishes

The Aluminium body and brim are treated with a chromate and then can be Polyester Powder Coated any BS or RAL colour. Under brim reflector painted white.

Optics

Asymmetric Glass Refractor
Polished anodised aluminium Louvre stack

Gear

Sodium and CDMT-T	70w Max
CDMT	100w Max
Metal Halide	100w Max
Compact Fluorescent	70w Max
Cosmopolis	45w -140w

LED Aray

6w - 36w

Fixings & Mountings

This fitting is mounted to any column or wall bracket via a 76mm diameter spigot and is secured using a series of 4 M10 grub screws. All fixings are Stainless Steel

Recommended Height

3mtr - 6 mtr

Maintenance

Loosen 2 screws and remove top casting to change lamp and gear

Photo Electrical Cell


All manufacturers miniature PED can be fitted Can be fitted remote from luminaire.

Weight & Windage

Average weight 7Kgs
Windage 0.07mtr sq



Dimensions

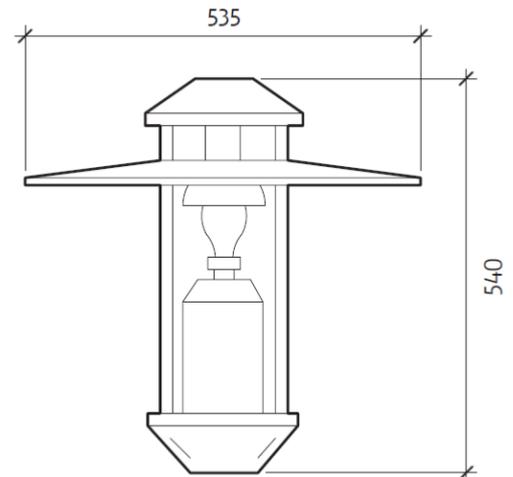

Typical Applications

- ✓ Car Parks
- ✓ Amenity
- ✓ Street / Highway
- ✓ Exterior
- ✓ House Builders

319, Long Acre, Nechells, Birmingham, UK. B7 5JT

Tel 0121 678 6700 Fax 0121 678 6701

Email: sales@candela.co.uk Web: www.candela.co.uk

Candela Light is a trading name of Candela Traditional lighting Limited Design Right subsisting in the design of articles shown herein are the property of Candela Traditional Lighting Limited



candela

L I G H T